

DECISION FEEDBACK EQUALIZATION OF FIBRE OPTIC DIGITAL COMMUNICATION LINKS

A Thesis Submitted
In Partial Fulfilment of the Requirements
for the Degree of

MASTER OF TECHNOLOGY

by

MAJ. S. K. DOGRA

to the


DEPARTMENT OF ELECTRICAL ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY, KANPUR
SEPTEMBER, 1984

21 SEP 1984

LIBRARY
CENTRAL LIBRARY
No. A 83978

EE-1984-M-DOG-DEC

CERTIFICATE

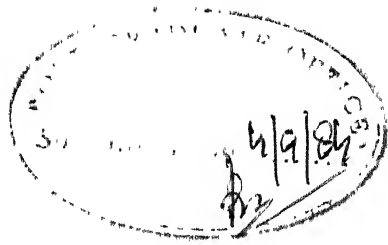

Certified that this work on 'DECISION FEEDBACK
EQUALIZATION OF FIBRE OPTIC DIGITAL COMMUNICATION
LINKS' by Maj. S.K. Dogra has been carried out under
our supervision and has not been submitted elsewhere
for a degree.

S Gupta
(Mrs. Sumana Gupta)
Assistant Professor

Ruchitrya
(P.K. Chatterjee)
Professor

Department of Electrical Engineering
Indian Institute of Technology
KANPUR

<p>POST GRADUATE OFFICE</p> <p>This thesis has been approved for the award of the Degree of Master of Technology (M.Tech.) in accordance with the regulations of the Indian Institute of Technology Kanpur</p> <p>Dated. 10/07/84 - <i>PS</i></p>

ACKNOWLEDGEMENT

I am most indebted and grateful to Dr. P.K. Chatterjee and Dr.(Mrs.) Sumana Gupta for their encouragement and valuable guidance throughout the course of this work.

My sincere thanks to Mr. P.G. Poonacha, who helped me in clearing many bottlenecks.

I am grateful to Major R.K. Sharma and Mr. Gautam Deb for their help.

The excellent service of Mr. J.S. Rowat, who typed the thesis, is also deeply appreciated.

Maj. S.K. Dogra

ABSTRACT

Performance of some fibre optic digital communication links with different source-detector combinations and fibre lengths are evaluated. Fibres are dispersive in nature and spread the optical signal on transmission through them. This dispersion with additive noise cause intersymbol interference (ISI) at high data rates. A decision feedback equaliser (DFE) has been used to reduce the effect of ISI.

To evaluate the performance of the DFE, the optical systems with different lengths and sources have been simulated on the digital computer DEC-1090 system. Simulations have also been carried out at much reduced data rates without the DFE. Results indicate that similar performance in terms of the probability of error of the system can be achieved without an equaliser, but, at much reduced data rates. $P(e)$ better than 1.25×10^{-7} has been obtained with laser source and $P(e)$ of 2.5×10^{-5} with LED source for a SNR of 14 dB.

TABLE OF CONTENTS

	Page
DEDICATION	i
CERTIFICATE	ii
ACKNOWLEDGEMENT	iii
ABSTRACT	iv
TABLE OF CONTENTS	v
CHAPTER 1 INTRODUCTION	
1.1 General	1
1.2 Optical Fibre Communication System	2
1.3 Noise in Photo-detectors	7
1.4 Equalization	10
1.5 Equalization in Fibre Optic Digital Transmission	13
1.6 Problem Description	16
1.7 Organisation of Thesis	17
CHAPTER 2 DECISION FEEDBACK EQUALIZER	
2.1 Introduction	18
2.2 System Description	19
2.3 Equalization for known Channel	21
2.3.1 Unitary Equalizer	22
2.3.1.1 Transversal Filter Equalizer	23
2.3.1.2 Zero Forcing Equalizer	25
2.3.2 Feedback Equalizer	26
2.3.3 Mean Square Error Minimization	28
2.3.4 A Gradient Technique Realization	33

2.4 Error Propagation Effect	34
CHAPTER 3 DFE FOR FIBRE OPTIC LINK	
3.1 Introduction	36
3.2 Adaptive DFE	36
3.3 Data Rate	44
3.4 Fibre Optic Digital Link Calculations	47
3.5 Impulse Response	51
3.5.1 General	51
3.5.2 Impulse Response of Electrical System	53
3.5.3 Impulse Response of System	55
3.6 Channel Bandwidth of the System	64
3.7 Design of DFE	66
3.7.1 Effect of Step Size (α)	69
3.7.2 Tap Gain Setting	70
CHAPTER 4 SIMULATION OF DFE AND RESULTS	
4.1 General	73
4.2 Simulation Results	74
4.2.1 Source-Laser; Fibre Length = 2.155 km	74
4.2.2 Source-LED; Fibre Length = 2.155 km	78
4.2.3 Source-Laser; Fibre Length = 4.310 km	93
CHAPTER 5 CONCLUSION	93
REFERENCES	103
APPENDIX: Flow chart and Program Listing	105

CHAPTER 1

INTRODUCTION

1.1 GENERAL:

The use of light for sending message information goes far back into time. In 1876 Alexander Graham Bell [1] explored the use of light for audio Communication. The invention of the LASER [2] in 1960-61 stimulated widespread interest in the use of light for communication purpose. In 1966 K.C. Kao and G.A. Hockham [3] proposed that optical fibre be used as dielectric wave-guides in under ground cable to carry information. The advent of optical fibres added a new dimension to optical communication. In 1968 typical fibre losses were above 1000 dB/km, but by 1970 losses under 20 dB/km were achieved.

Presently installed fibres have losses in the range of 3 dB/km or less at wave lengths of 820-850 nm. Laboratory samples have shown losses as ^{low as} 0.47 dB/km at 1550 nm wavelength. The present objective is to develop fibres with losses around 1 dB/km for commercial use.

The advantages offered by fibre optical communication are enumerated below.

- a) The system is immune to EMI, RFI and cross talk.
- b) It offers large bandwidth and low loss.
- c) Small size and weight with consequent ease of installation and reduced transportation volume.
- d) Potential low cost
- e) No electrical ground loop or short circuit problem
- f) Reduction of total system power consumption. Actual power output used is of the order of mw.

1.2 OPTICAL FIBRE COMMUNICATION SYSTEM:

The block schematic of the fibre optic digital link is shown in Fig. 1.1. The system can be divided into two main parts - one part which deals with the electrical signals and the other part dealing with the optical energy. The latter part is shown within the dotted lines in the figure and includes the optical source, the optical fibre and the photodetector.

The different subsystems in the fibre optical digital link are briefly explained below.

Driver: Like in any communication system the input signal or data first modulates a carrier which is propagated through the channel. Here too the input modulates the optical

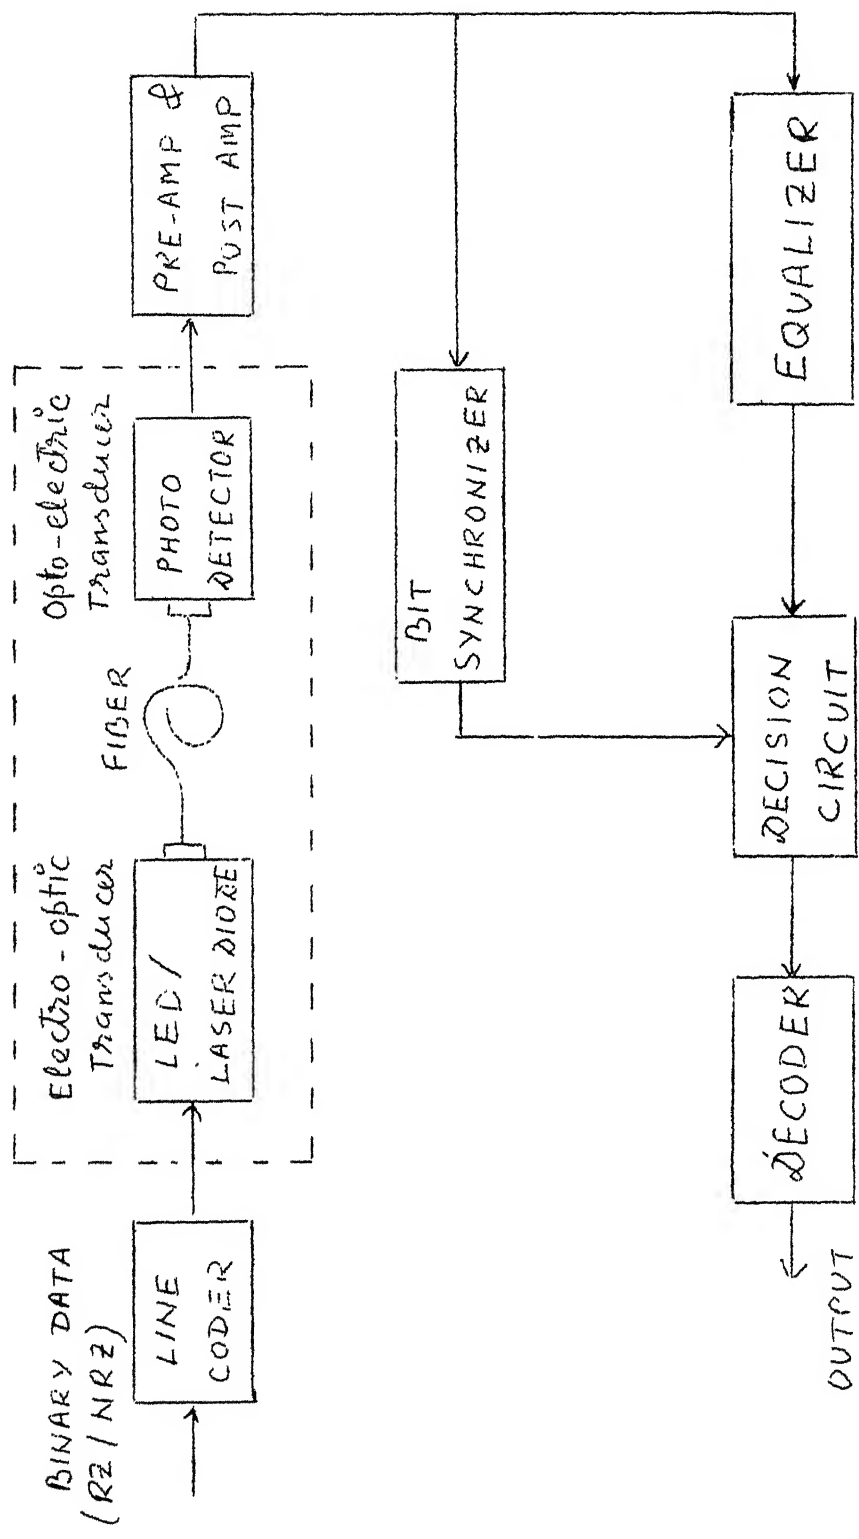


FIG 1.1 OPTICAL FIBRE COMMUNICATION SYSTEM

source directly, when the input is '1', the optical source is turned on otherwise it is kept off.

Electro-optical Transducer: Semiconductor laser and light emission diode (LED's) are being used for converting electrical signals into optical signals. In the system under discussion we have used both the laser diode as well LED.

Optical Fibre: The optical signals are propagated through the optical fibres channel. These signals undergo some losses and distortion depending upon the characteristic of the fibre. The distortion is such that it spreads the signal pulse in time domain. This is mainly caused by two types of dispersion in optical fibres, i.e. intermodal and material dispersion. However, in graded-index fibres only the material dispersion is significant.

Opto-Electric Transducer: The optical signal is received by a photo-detector, which converts the incident optical signal into an electrical signal. The photodetectors are mainly of two types.

1. P-I-N Diodes
2. Avalanche photodiodes (APD's)

Front End Receiver: The front end receiver circuit is a combination of a pre-amplifier and a post-amplifier. As

the data rate is very high, the pre-amplifier is implemented using a FET, CA-3127E.

Equalizer: The distortion in the optical fibre channel spreads the signal pulse in time domain. The material dispersion and the additive noise of the system cause ISI. An equalizer is used to reduce the effect of the ISI. In the system under discussion we have used a Decision feedback equalizer, which reduces the magnitudes of the interfering samples.

Bit Synchroniser: The bit synchroniser recovers the symbol timing clock from the received signal and selects the sampling instants. The equalized signal is sampled at the right instants and at the rate at which it is received. A decision is then made about the sampled signal using a threshold detector, and we get the required signal after it is decoded suitably.

In any communication system the input signal modulates a carrier which is propagated through a channel. Here we consider the input as a Binary data sequence of '1' or '0'. The optical source output intensity is modulated by the input electrical signal. Thus when a '1' is transmitted the optical signal having some intensity propagates through the fibre. The impulse response of the fibre

spreads the signal pulse in time domain. The attenuated and dispersed optical signal when arrives at the receiving end of the fibre, it is converted into an electrical signal by direct detection in the photodetector. During the detection process certain noise inherent to the detection mechanism and the front-end circuits get added to the signal. The effect of the noise depends upon the type of the photo detector used. This will be discussed in a later section.

By the principle of superposition for optical fibre transmission (Personick [4]) single pulse description can be extended to obtain a model for the transmission of an entire sequence of ON and OFF pulses. The photo detector output $r(t)$, can be written as

$$r(t) = \sum_K g_K s(t-t_K) + n(t) \quad (1.1)$$

where the time instants t_K form a poisson process having intensity $\lambda(t)$, with

$$\lambda(t) = \sum_i a_i p_F(t-iT) + \lambda_0 \quad (1.2)$$

where g_K = avalanche gain factor

$s(t)$ = output pulse of photodetector

$n(t)$ = additive noise

T = signalling interval

$\lambda_0 \geq 0$ is the dark current

$a_i = 0,1$ equiprobable data symbols

$p_F(t) \geq 0$ pulse response of the fibre

The output from the photodetector as given by eq. (1.1) is then filtered to reduce the effect of noise by passing through a low noise pre-amplifier. A decision is then made about the received signal using a threshold detector and we get the required signal.

An optical fibre communication system might differ from the one discussed in this section depending upon the source, data rates and fibre length used. These aspects have been discussed in the chapters to follow.

1.3 NOISE IN PHOTO-DETECTORS:

The photo-detector current consists of the sum of displacement currents of individual hole and electron pairs generated within the photo-detector. The time at which electrons are generated due to absorption of the impinging photons are random and obey Poisson distribution. Every individual optical pulse (correspondence to '1') differs from the average by some unpredictable amount and this difference can be termed as a signal dependent noise. In practice electrons are also emitted when no

optical signal (photons) fall on the photo-detector. This is called the dark current and is modelled by introducing a constant additive intensity function λ_0 before the detector (see eq. (1.2)). To transmit a '0', the optical pulse is not propagated for that bit interval, but, the detector emits electrons due to thermal ionization (dark current).

Another source of noise is thermal noise which is always present in electronic circuits. A circuit model (Fig. 1.2) is shown to illustrate the various noise sources. The output current from the photo-detector is given by

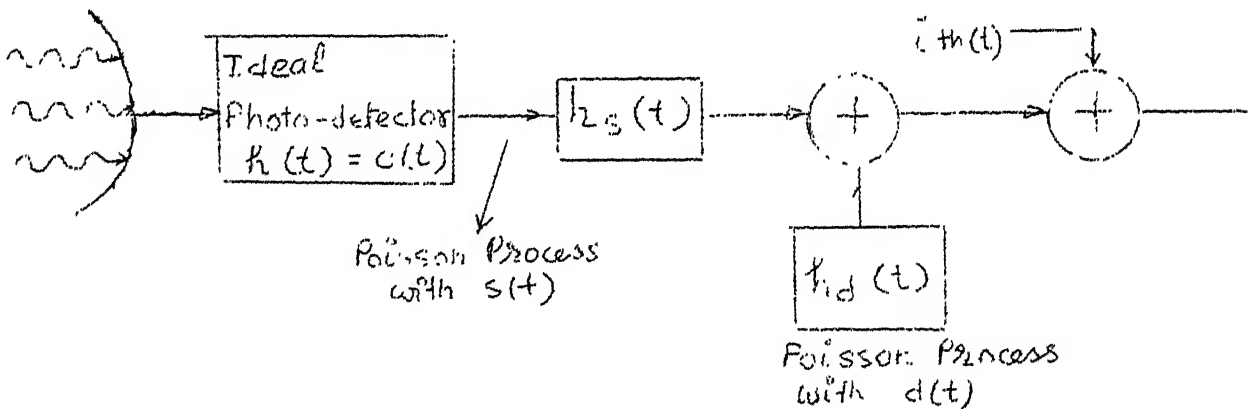


FIG 1.2 DETECTOR MODEL

$$i(t) = i^s(t) + i^d(t) + i^{th}(t) \quad (1.3)$$

where,

$$i^s(t) = \sum_{j=1}^{N_s} g_j h_s(t-z_j)$$

$$I^d(t) = \sum_{j=1}^{N_d(t, t+T)} g_j h_d(t-z_j)$$

where $i^s(t)$ is the shot noise process (signal dependent) and $N_s(t, t+T)$, the number of photo-electrons generated in a closed interval $[t, t+T]$, is random and has Poisson distribution with mean $\lambda_s(t)$

$$\text{where } \lambda_s(t) = \int_t^{t+T} p(t) dt$$

z_j is the time when the j th electron is emitted, $h_s(t)$ is the time invariant filter modelling the component function of the shot noise. $i^d(t)$ is the dark current process with an intensity λ_o ,

$i^{th}(t)$ is the additive thermal noise process and

g_j is the gain of the photo diode.

In the case of a PIN diode detector $g_j=1$, and pulse signal-to-noise ratio, $\int h_s^2(t)/N_o$, is of the order of -20 dB. Therefore, the shot noise is neglected in comparison with the thermal noise in the case of PIN diode.

In the case of APD detector the gain is large. This increased g_j , increases the shot noise. Pulse signal-to-noise ratio $\int g^{-2} h_s^2(t) dt / N_0$ is of the order of 20 dB. Here the shot noise is quite large compared to the thermal noise and hence thermal noise is neglected when APD detector are used. As we have used a PIN diode detector in the F.O.C. system studied, we can neglect the shot noise component.

1.4 EQUALIZATION:

The model of the F.O.C. system has been discussed in Section 1.2. In that section we have noticed that received pulses are spread out in time. Therefore, the transmission of higher and higher data rates will be possible if the fibre optic medium accomodates larger BW. Otherwise, with the higher data rates, ISI will increase and intum increasing the probability of error.

There are two general methods for equalization:

- a) Frequency domain equalization, and
- b) Time domain equalization

Here we will discuss Time-domain equalization. Since early 1960, there has been a lot of interest in time domain equalizers.

A typical fibre optic receiver for digital signalling schemes consists of a photo-detector, an amplifier, an equalizer and a decision device, along with the necessary synchronization circuits as shown earlier. We treat the fibre optic channel as linear in power [4,5], i.e.

$$P(t) = \sum_{i=-\infty}^{\infty} I(i) h_p(t-iT) \quad (1.6)$$

where,

$P(t)$ - is optical power driving the photo-detector

$I(i)$ - optical power from source

$h_p(t)$ - is the fibre response

The average signal at the equalizer output is

$$\langle y(t) \rangle = \sum_{i=-\infty}^{\infty} I(i) p(t-iT) \quad (1.7)$$

where $p(t)$ is the overall pulse response. The equalizer output is given by

$$y(t) = \sum_{i=-\infty}^{\infty} I(i) p(t-iT) + n(t) \quad (1.8)$$

where $n(t)$ is noise, modelled as a Gaussian-plus filtered-Poisson process.

In time domain, the received signal after the photo-detector is fed into the equalizer which is a delay line with multiple taps, viz. Transversal filter of Fig. 1.3. The tap weight vector $C \triangleq [C_1 C_2 \dots C_n]^T$ is

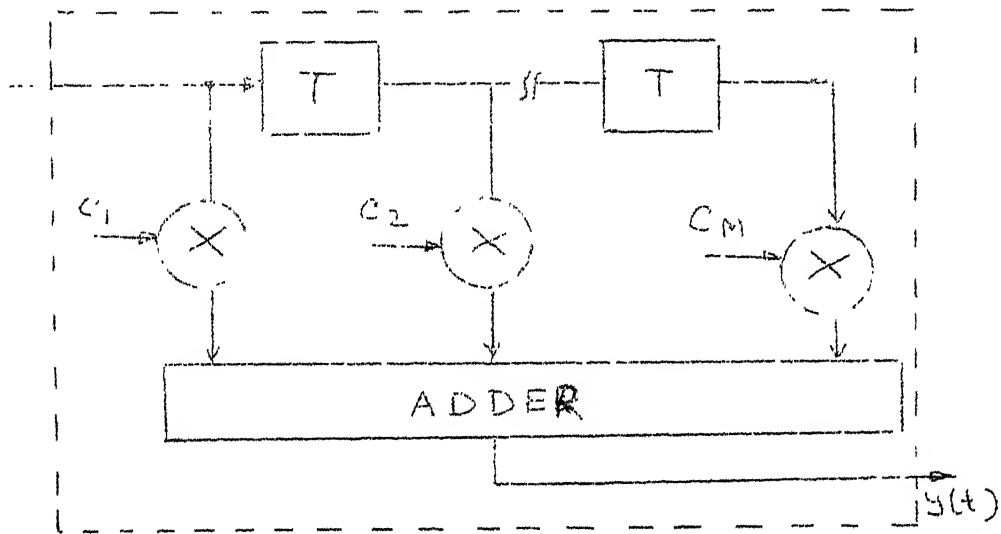


FIG 1.3 TAPPED DELAY-LINE EQUALIZER

computed in order to satisfy a suitable criteria. Two equalization criteria are often used, viz. zero-forcing as suggested by Lucky [6] and minimization of the mean-square error (MSE) [7]. In the zero forcing criterion the output distortion 'D' is minimized, where

$$D = \frac{1}{q_0} \sum_{K=-\infty, K \neq 0}^{\infty} |q_K|$$

and the peak distortion of the unequalized pulse < 1 .

In first case, C is computed by solving a linear system. The second criterion minimizes the MSE between the received sequence estimate and the transmitted sequence. From a mathematical view point, this approach searches for

linear least squares solution. The main draw back of the tapped delay line equalizer results from the fact that the length of the equalizer tends to infinity.

In 1967 Austin [8] determined a new suboptimal receiver structure which is non-linear and uses its previous decisions to reduce ISI in high speed data transmission. It is called a Decision Feedback Equalizer (DFE) as it feeds back the output symbols through another TDL for comparison with the forward TDL output. After this a lot of work has been done on DFE. The main advantages of DFE are:

- i) Number of taps required for the forward TDL is much less than the transversal filter equalizer (unitary equalizer) tap delay line.
- ii) The number of taps required for the backward TDL is also limited.
- iii) The performance of the DFE is better than the unitary equalizer for the same data rate.

1.5 EQUALISATION IN FIBRE OPTIC DIGITAL TRANSMISSION:

Since the development of fibre optic digital communication, a lot of work has been done for the minimization of ISI and noise.

Foschini et.al. [9] in October 1975 worked on optimum direct detection of digital data signal. In their

approach they processed the output of the photo-detector, so that the probability of error is minimum using the Viterbi algorithm detection principle. Viterbi algorithm detector is difficult to implement in hardware for high data rate systems with present day technology. A sub-optimal solution using a DFE as the first stage in place of the first VA detector of above has been considered by Govind Sharma [10]. The second stage of the receiver as obtained by him is also quite complex as it requires large memory and a very high sampling rate.

Dogliotti et.al. [11] in 1976 considered the problem of base-band equalization in optical PCM fibre system. For the given data and fibre characteristics they have suggested an equalizer transversal filter, where the tap weight vector $C \triangleq [C_1, C_2 \dots C_n]$ are computed in order to satisfy a suitable criterion for the minimization of ISI. In this paper as well as one by Dogliotti and A. Luvison [12], the authors have minimized ISI by sequence estimation technique. In such a case, the received process is written according to its 'state equations' and the optimum estimator is derived as a Kalman Filter [13]. For TDL structures, the MMSE criterion guarantees better performance as shown in Fig. 1.4. This figure corresponds to a probability of error of 10^{-9} and shows that MMSE

equalization is better than zero forcing equalization and also when $\sigma/T < 1$, then we can even ignore the equalizer provided that SNR is high enough.

D.G. Messerschmitt [14] considered a digital fibre optic transmission system with Poisson signal statistics and additive wide sense stationary noise. The criterion of optimization is MSE between the decision threshold input and the current data digit S_k . He has considered the zero forcing criterion as well as MMSE for both linear and non-linear (DFE) equalizer and obtained solution for each criterion. Some special cases like white noise and band limited noise have also been considered. Capt. R. Wahi [15] designed and evaluated the performance of the DFE based on the Austin [8] sub-optimal receiver structures. He also included predistortion filter in the transmitter and then evaluated the performances of system. At lower SNR values pre-distortion filter reduces error and gives a gain of approximately 1.5 dB. G. Tamburelli [16] has examined the performances of decision feedback and feed-forward receiver where the post-cursor correction is carried out only once while the precursor correction takes place many times without requiring complex circuits as the relevant transversal filter consists of only one or two taps. He has shown that the post-cursor of the

incoming signal is compensated by the decision feedback, thus at the output of a first decision circuit the transmitted signals are evaluated with an error probability relevant to a decision feedback receiver, and precursor are compensated by other decision circuits which follow the first. He has shown that this arrangement is superior to the existing ones and allows a transmission rate equal to twice the Nyquist rate.

1.6 PROBLEM DESCRIPTION:

The problem considered in this thesis is to evaluate the performance of the Digital Fibre Optical Communication System at different data rates. The following systems are considered.

- a) Source-laser diode, link length 2.155 km
- b) Source-LED, link length 2.155 km
- c) Source-laser diode, link length 4.310 km

At higher data rates, noise and ISI affect the performance of the system. This can be reduced with the help of an equalizer. We have used a DFE for this purpose. The tap weight values for the DFE are calculated by Mosen's Adoptive linear filtering method.

The F.O.C. system is simulated on the digital computer DEC-1090 system to find the maximum data rate that can be transmitted over the system with and without the DFE for different SNR values.

1.7 ORGANISATION OF THESIS:

This thesis comprises 5 chapters. In Chapter 2, we have briefly reviewed the work done on adaptive equalizers by Peter Monsen. Chapter 3 describes a fibre optic communication system and its link parameters and the design of the DFE. It also describes the impulse responses for various link lengths and the bandwidth of the channel.

Chapter 4 describes the simulation of the DFE on the DEC 1090 system. Tap gain settings and the probability of error for various SNR's at different data rates are tabulated.

Chapter 5 concludes this thesis with a discussion of the results obtained, and some suggestions for possible future work.

CHAPTER 2

DECISION FEEDBACK EQUALIZER

2.1 INTRODUCTION:

Synchronous digital communication systems are degraded primarily by noise and intersymbol interference. To combat these effects, equalization techniques [17],[18], have been suggested. In 1967 Austin [8] considered a feedback receiver that compensated for the effects of intersymbol interference due to both future and past symbols. His optimum structure consists of a matched-filter, transversal filter combination (forward filter) operating on the received signal and a feedback linear filter operating on the past decisions. The past decisions have been assumed to be correct. Non-stationary effects of the channel were not considered.

Peter Mosen [19] has worked on adaptive equalization again under the fundamental assumption of no decision error so that the output digits can be assumed correct. The optimality criterion is minimum-mean-square error (MMSE). Under this criterion, the receiver is shown to be superior to one without the feedback path.

This feedback receiver, besides mitigating noise and ISI acts to eliminate timing jitter and Doppler shifts in the channel.

Some theoretical calculations and experimental results indicate that the error propagation effect due to incorrect decision is not large. (Austin has also shown it). Since the ISI span is normally short, a discrete Markov process model for analysis of the error propagation effect can be used to determine the error propagation effect.

2.2 SYSTEM DESCRIPTION:

The communication model under study considers transmission of serial binary data over a linear channel for which the dispersion has width of the order of the data rate reciprocal. The channel dispersion produces ISI which can be excessive.

The communication model is shown in Fig. 2.1. If the

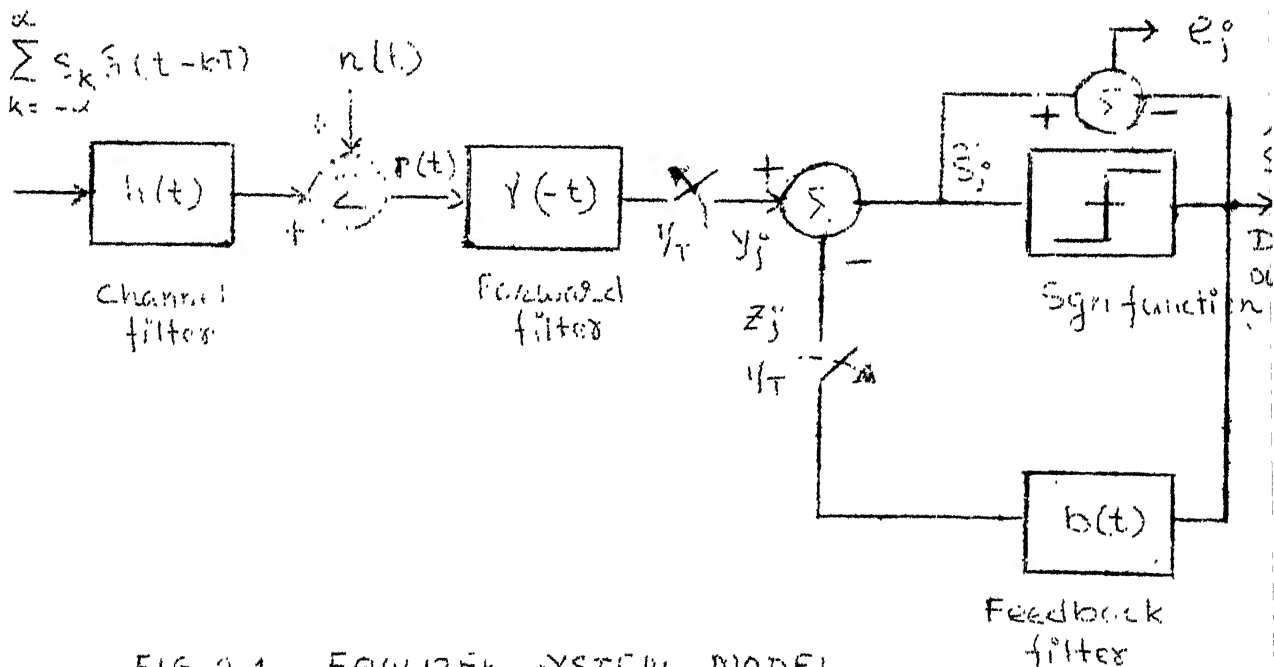


FIG 2.1 EQUALIZER SYSTEM MODEL.

channel impulse response is $h(t)$, the received signal $r(t)$ is given by

$$r(t) = \sum_i S_i h(t - iT) + n(t) \quad (2.1)$$

where T is the interval between symbols.

The binary digits S_i are equally likely, and have a correlation function.

$$C_K = E \{S_i S_{i+K}\} \quad (2.2)$$

The noise term is a realization of a zero-mean white Gaussian process with spectral density μ .

The receiver consists of two linear filters, the forward filter that operates on the received signal, and the backward filter that operates on the reconstructed data. Delays in the channel impulse response can force the use of a noncasual forward filter when the transmission delay is normalized to zero. Accordingly, the impulse response of the forward filter $\gamma(-t)^*$ is defined over the entire range $-\infty < t < \infty$.

The backward filter has discrete input and output and thus can be realized as a transversal filter with symbol interval tap spacings. Because the filter is located in a

*It is notationally convenient to define the forward filter impulse response as the function $\gamma(-t)$.

feedback loop, it can only operate on past reconstructed digits. Its impulse response can then be written in terms of the transversal filter tap gain b_i as

$$b(t) = \sum_{i=1}^{\infty} b_i \delta(t-iT) \quad (2.3)$$

The reconstructed digits are formed by a decision device that produces the sign of the analog sample at the summed output of the two filters.

2.3 EQUALIZATION FOR KNOWN CHANNEL:

To solve the time varying digital communication problem, various optimization criteria will be investigated for a stationary environment. After considering the different criteria, adaptive techniques will be considered. The input of the forward corrective filter is the sum of the signal and noise terms.

$$r(t) = \sum_{K=-\infty}^{\infty} S_K h(t-KT) + n(t) \quad (2.4)$$

The forward filter linearly operates on the reconstructed discrete synchronous output. The outputs of the forward and backward filters are combined. The impulse response of the backward filter can be written as

$$b(t) = \sum_{K=-\infty}^{\infty} b_K \delta(t-KT) \quad (2.5)$$

Thus the combined signal into the decision device at the sampling time jT is given by

$$\hat{S}_j = Y_j - Z_j = \sum_{j=-\infty}^{\infty} \gamma(u) r(jT+u) du - \sum_{l=1}^{\infty} b_l S_{j-l} \quad (2.6)$$

Under the assumption $\hat{S}_K = S_K$, the input to the decision device can be split into the signal, noise and intersymbol interference terms. These components found from equations (2.4) and (2.6) are as follows

$$\hat{S}_j|_{\text{signal}} = S_j \gamma' h_0 \quad (2.7)$$

$$\hat{S}_j|_{\substack{\text{intersymbol} \\ \text{interference}}} = \sum_{l \neq 0} S_{j-l} \gamma' h_l - \sum_{l=1}^{\infty} b_l S_{j-l} \quad (2.8)$$

$$\hat{S}_j|_{\text{noise}} = \gamma' n_j \quad (2.9)$$

A receiver design depends upon the criterion which minimises the intersymbol interference term and the noise term,

2.3.1 Unitary Equalizer:

In this section following types of unitary equalizers are described in brief.

1. Transversal Filter Equalizer
2. Zero Forcing Equalizer

2.3.1.1 Transversal Filter Equalizer:

For a unitary equalizer in a receiver consisting of only a forward filter and a decision device, the intersymbol interference term can be eliminated if a function $\gamma(t)$ can be found. $\gamma(t)$ may be a tandem configuration.

$$\gamma(-t) = \int_{-\infty}^{\infty} g(-u) W(t-u) du \quad (2.10)$$

where $g(-t)$ is the impulse response of a fixed filter with bandwidth roughly equal to that of the channel, and $W(t)$ is the impulse response of a transversal filter with tap spacing equal to the symbol interval.

If the transversal filter has N_1 negative - index tap outputs and N_2 positive index tap outputs, $W(t)$ takes the form

$$W(t) = \sum_{i=-N_1}^{N_2} W_i \delta(t-iT) \quad (2.11)$$

where W_i is the i th tap gain. These tap gains are then to be chosen to minimise the effects of intersymbol interference. The forward filter impulse response is given by

$$\gamma(-t) = \sum_{i=-N_1}^{N_2} W_i g(iT-t) \quad (2.12)$$

and the system pulse response is

$$q_K \triangleq q(KT) = \gamma' \underline{h}_K = \sum_{i=-N_1}^{N_2} w_i \int_{-\infty}^{\infty} g(u+iT)h(u+KT)du \quad (2.13)$$

The integral in eqn. (2.13) is the pulse response at the input to the transversal filter at the sampling time $(K-i)T$. Let

$$\theta_K = \int_{-\infty}^{\infty} g(u) h(u+KT)du \quad (2.14)$$

Thus eqn. (2.13) can be written as

$$q_K = \sum_{i=-N_1}^{N_2} w_i \theta_{K-i} = \underline{w}' \underline{\theta}_K \quad (2.15)$$

where,

$$\underline{w} = \begin{bmatrix} w_{N_1} \\ \vdots \\ w_{N_2} \end{bmatrix}, \quad \underline{\theta}_K = \begin{bmatrix} \theta_{K+N_1} \\ \vdots \\ \theta_{K-N_2} \end{bmatrix} \quad (2.16)$$

For the unitary equalizer the intersymbol interference term, eqn. (2.8), is then

$$\left. \dot{s}_j \right|_{\substack{\text{inter symbol} \\ \text{interference}}} = \sum_{i \neq 0} q_i s_{j-i} \quad (2.17)$$

with a finite number of degrees of equalization freedom. It may not be possible to force eqn. (2.17) to be identically zero. A possible optimization problem is

$$\min_{k \neq 0} \sum q_k^2, \quad q_0 = \text{constant} \quad (2.18)$$

The performance of the unitary equalizer can be considered by first evaluating the performance when N_1 and N_2 are infinity and then investigating the case when N_1 or N_2 are restricted to a finite number of degrees of freedom. When N_1 and N_2 are infinity, the ISI can in most cases be reduced to zero if

$$q_K = \sum_{i=-\infty}^{\infty} W_i \Theta_{K-i} = 0, \quad K \neq 0$$

2.3.1.2 Zero Forcing Equalizer:

Intersymbol interference can also be minimised by a zero forcing equalizer as suggested by Lucky [6]. The peak distortion for the pulse $q(t)$ is

$$D = \frac{1}{|q_0|} \sum_{K=-\infty}^{\infty} |q_K| \quad (2.19)$$

The input pulse to the equalizer will be assumed to have initial peak distortion D_0 . The reference sample x_0 will also be normalized to unity. The problem is to determine the tap gain coefficients for a tap transversal equalizer which minimises the final peak distortion.

Lucky establishes that at minimum distortion, at least $L-1$ values of q_K must be zero. This gives $L-1$ equations

in $L-1$ unknowns, but the question remains as to which $L-1$ zeros in the output response does one force to achieve minimum distortion. A key theorem is then proved which shows that if the initial distortion

$$D_0 = \frac{1}{\|\Theta_0\|^2} \sum_{\substack{K=-\infty \\ K \neq 0}}^{\infty} |\Theta_0| \quad (2.20)$$

is less than unity then the minimum output distortion must occur for those $L-1$ weight values which simultaneously cause the corresponding output response sample to be zero, i.

$$q_K = 0 \quad K \in (K_L, K \neq 0) \quad (2.21)$$

when $D_0 > 1$, the settings which force corresponding output zeros may not be the optimum values, and a distortion greater than the minimum may result.

This approach is designed for channels where not only is intersymbol interference the limiting factor (since noise power is not considered) but, also where the intersymbol interference is bounded above. This situation exists to a large extent on telephones channels where the technique has been applied.

2.3.2 Feedback Equalizer:

Last section described the class of unitary equalizers which operate on only the received signal. The feedback

equalizer also considers the reconstructed data sequence \hat{S}_K , which has been assumed to be the transmitted data. This section describes the choice for forward and backward filters for an intersymbol interference minimization. The prefilter is taken as a matched filter so the input noise power to the transversal filter is minimized.

From eq. (2.8) the ISI term at the input to the decision device is

$$\left. \hat{S}_j \right|_{\substack{\text{inter symbol} \\ \text{interference}}} = \sum_{\ell \neq 0} q_{\ell} S_{j-\ell} - \sum_{\ell=1}^{\infty} b_{\ell} S_{j-\ell} \quad (2.22)$$

where

$$q = \sum_{i=-N_1}^{N_2} w_i \phi_{\ell-i} \quad (2.23)$$

For minimization of intersymbol interference, the feedback filter be

$$b_K^+ = q_K = \sum_j w_j \phi_{K-j}, \quad K = 1, 2, \dots, \infty \quad (2.24)$$

For this choice of a feedback filter, all the ISI due to past pulses is canceled exactly. The ISI power becomes

$$Y^2 = \left\{ \sum_{K=-\infty}^{-1} q_K S_{j-K} \right\}^2 \quad (2.25)$$

which, with an infinite number of degrees of freedom can be reduced to zero. The optimum weights solve the semi-infinite set of equations.

$$\sum_{i=-\infty}^{\infty} h_i^* \phi_{K-i} = 0, \quad K < 0 \quad (2.26)$$

Peter Monsen [19], solved these equations by spectrum factorization.

Since unitary and feedback equalizers reduce the ISI to zero, one would qualitatively expect the feedback equalizer to be superior because of its noise advantage.

2.3.3 Mean-Square Error Minimization:

For channels which are not limited solely by either ISI or additive noise, an optimizing criterion should be chosen which minimises both the effects. The feedback receiver minimises the mean square error. The error is defined as the difference between the analog voltage at the input to the decision device and the corresponding transmitted binary digit, i.e.

$$e_K = \tilde{S}_K - S_K \quad (2.27)$$

where

$$\tilde{S}_K = \sum_{l=0}^{\infty} S_{K-l} h_l^* \gamma - \sum_{l=1}^{\infty} S_{K-l} b_l + \gamma' n_K \quad (2.28)$$

Here error is produced by both ISI and additive noise. The minimum mean-square-error equalizer minimizes the mean

square of eqn. (2.27) with respect to both forward and backward filters. By including the backward filter in the optimization. Monsen has shown that the MMSE feedback equalizer is superior in the absence of decision error to the MMSE unitary equalizer.

This criterion of minimum-mean-square error (MMSE) has been compared with the minimum probability of error (MPE) criterion. The later is the best criterion for the class of receivers that consider only one symbol at a time. The MPE receiver and its associated probability of error were determined by using steepest descent techniques. It was seen that the MPE receiver had significantly better performance than the MMSE receiver. However, it was finally concluded from this study that although the two criteria are not completely equivalent in performance, a vast majority of situations do lead to equivalent performance. The simplicity in the use of the MMSE criterion is then the deciding factor in the choice of the criterion.

The minimisation problem to be studied can be stated as

$$\min_{\mathbf{A}, \mathbf{b}_i} \text{MSE} = \overline{(\hat{\mathbf{x}}_K - \mathbf{s}_K)^2}, \quad i = 1, 2, \dots, \infty \quad (2.29)$$

The input to the forward filter in the vector notation will be defined as $\mathbf{x}_K = \mathbf{r}(t+KT)$, so that

$$\underline{r}_K = \sum_{l=1}^K S_{K-l} \underline{h}_l + \underline{n}_K \quad (2.30)$$

$$\hat{\underline{r}}_K = \underline{r}_K' \underline{y} - \sum_{l=1}^{\infty} S_{K-l} b_l \quad (2.31)$$

Then let

$$\underline{S}_K = \begin{bmatrix} S_{K-1} \\ S_{K-2} \\ \vdots \\ \cdot \end{bmatrix}, \quad \underline{b} = \begin{bmatrix} b_1 \\ b_2 \\ \vdots \\ \cdot \end{bmatrix} \quad (2.32)$$

be semi-infinite column vectors, so the decision device input is

$$\hat{\underline{r}}_K = \underline{r}_K' \underline{y} - \underline{S}_K' \underline{b} \quad (2.33)$$

The MMSE optimization is invariant to the choice of time origin so that for simplicity the zeroth sampling instant is chosen. The minimization can now be cast into a more familiar form, i.e.,

$$\min_{\underline{y}, \underline{b}} \text{MSE} = \overline{(\underline{r}' \underline{y} - \underline{S}' \underline{b} - S)^2} \quad (2.34)$$

By the introduction of partitioned vectors, eqn. (2.34) can be cast in the functional form of a single vector variable, as follows:

$$\min_{\underline{f}} \text{MSE} = (\underline{f}' \underline{V}_K - \underline{S}_K)^2 \quad (2.35)$$

where

$$\underline{f} = \begin{bmatrix} \underline{y} \\ \underline{b} \end{bmatrix}, \quad \underline{V}_K = \begin{bmatrix} \underline{r}_K \\ -\underline{s}_K \end{bmatrix} \quad (2.36)$$

The solution of eqn. (2.35) leads to the solution of the set of equations.

$$\langle \underline{V}_K \underline{V}_K^T \rangle \underline{f} = \langle \underline{V}_K \underline{s}_K \rangle \quad (2.37)$$

where the $\langle \rangle$ brackets are employed to denote the expected value.

The solution for the forward filter impulse response is found to be of the form

$$\gamma(-t) = \sum_i W_i h(iT-t) \quad (2.38)$$

which is the representation for a matched filter in tandem with a transversal filter with symbol-interval tap spacing. The transversal-filter impulse response is written in terms of the tap gains W_i as

$$W(t) = \sum_i W_i \delta(t-iT) \quad (2.39)$$

The receiver is then specified by the tap gain set $\{W_i\}_{i=-\infty}^{\infty}$ associated with the forward filter and the tap gain set $\{b_i\}_{i=1}^L$ associated with the backward transversal filter. The solution for these tap gains were determined by Mosen in

terms of their 'Z' transform. The technique of spectrum factorization [25] was employed to determine the solution for $W(z)$ and $B(z)$. The solutions are

$$W(z) = [U^-(z) U^+(0)]^{-1} \quad (2.40)$$

$$B(z) = T[U^+(z)/U^+(0)]^{-1} \quad (2.41)$$

The positive superscript indicates a spectrum factor with all its poles and zeros outside the unit circle, whereas the negative superscript factor has them all inside. Since $W(z)$ has no singularities outside the unit circle, it follows that the forward tap-gain function is anticausal i.e.

$$W_i = 0 \quad i > 0$$

The forward transversal filter thus operates only on future values of the matched filter output.

Thus, in the absence of decision errors, the intersymbol interference dual to past digits is cancelled exactly by the backward filter if the source digits are uncorrelated. Under this condition the forward filter then minimizes the mean-square error due to noise and the ISI due to the future digits. It is interesting to compare the optimum filter and MMSE for the feedback and nonfeedback cases. The non-feedback or unitary equalizer (UE) is

a special case of the feedback equalizer (FE), namely, when $B(f)$ is set identically to zero. Thus the optimum FE is superior in a MLSE sense, to the optimum UE.

2.3.4 A Gradient Technique Realization:

For the fixed known channel, a steepest-descent or gradient technique was found for the ISI minimization equalizer. For the MLSE receiver, a gradient technique would need to synthesize three separate filters, namely, the matched filter, forward filter and the backward filter.

In any real system the channel will be band limited effectively, so the channel and the matched filter can be specified in sampled-data form.

The received signal $r(t)$ in sampled data form is

$$r(t+KT) = \sum_{i=-\infty}^{\infty} r\left[\frac{1}{B} + KT\right] \text{sinc}(\beta t - i) \quad (2.53)$$

The optimum solutions are identical to the one obtained for the mean square error in Section 2.3.3. The difference is that the forward filter can now be synthesized by one transversal filter with tap spacings equal to the Nyquist interval ($1/B$).

A gradient algorithm for a MLSE receiver takes the form

$$\underline{f}_{n+1} = \underline{f}_n - \alpha \left[\overline{\underline{V} \underline{V}^T} \underline{f}_n - \overline{\underline{V}_n} \underline{S}_n \right] \quad (2.54)$$

where \mathbf{f}_n is the receiver vector (2.36) at the n th iteration. Eqn. (2.54) can be cast into the form :

$$\mathbf{f}_{n+1} = \mathbf{f}_n - \alpha \overline{\mathbf{V}} \mathbf{e}_n \quad (2.55)$$

where \mathbf{e}_n is the error at the n th iteration. The gradient technique and the adaptive receiver implementation using this techniques are discussed in the next chapter.

2.4 ERROR PROPAGATION EFFECT:

The DFE uses receiver decision in an attempt to cancel ISI due to the past pulses. A fundamental assumption has been made that the reconstructed data sequence is identical with the transmitted data. In reality it is not true. Decision errors will occur and they will cause two effects. The first is that of an adaptation error. Since the reconstructed data sequence is employed as a test signal to determine the learning algorithm parameter. Decision error will further perturb the ideal equalizer tap gain setting. The second effect is more severe.

The DFE decisions are linearly filtered in order to develop the appropriate voltage for the ISI cancellation. When the decision is wrong, the probability of decision error in the immediate future is enhanced as the decision error propagate through the backward filter. This effect is thus termed Error Propagation. The resulting error

propagation will be larger than the error propagation under the No decision error premise.

Monsen [20] analysed the magnification of the error probability due to the Error propagation effect for a single echo channel and a truncated geometric response and observed that degradation due to error propagation effect is very small.

Since the error propagation effect is negligible, the DFE is superior to the linear equalizer. Moreover, because the backward filter eliminates interference due to all the past digits, the number of transversal filter taps in the forward filter can be reduced. This leads to an implementation advantage and improved adaptation as the self noise due to adaptation increases with the number of taps.

CHAPTER 3

D.F.E. FOR FIBRE OPTIC LINK

3.1 INTRODUCTION:

An important area of application for optical fibres is the transmission of high speed digital data signals. Even though the dispersion effects caused by a fibre are greatly reduced with respect to other kind of channels, the main limiting factor in increasing the data rate is imperfect channel characteristics.

The approach to match the exact characteristics of the system to reduce the effect of noise and ISI is not practical since it is difficult to design transmitting and receiving filters having the exact optimal characteristics. We have seen that the DFE is a simpler alternative which provides a considerable reduction of the effects of noise and ISI. In the next section adaptive DFE based on the gradient technique has been described.

3.2 ADAPTIVE DFE:

For a fixed known channel, an equalizer realized by gradient technique minimises the mean-square error. This technique is used to synthesize three separate filters, i.e. the matched filter, the forward filter and the backward

filter. Furthermore, the matched filter impulse response is a continuous time function. In any real system the channel will be effectively band limited to some region $|f| \leq B/2$. So the channel and the matched filter can be specified in sampled-data form. The continuous vector $\underline{\gamma} = \left\{ \gamma(t) \right\}_{t=-\infty}^{\infty}$ can then be replaced by the infinite - dimension discrete-index vector.

$$\underline{\gamma} = \left\{ \gamma_i = \gamma(i/B) \right\}_{i=-\infty}^{\infty} \quad (3.1)$$

and $\underline{\gamma}$ completely describes $\gamma(t)$ by the interpolation formula

$$\gamma(t) = \sum_{i=-\infty}^{\infty} \gamma_i \text{sinc}(Bt-i) \quad (3.2)$$

If the channel is band limited to $B/2$, it is reasonable to position a filter prior to the receiver which will also band limit the additive noise to the range $|f| \leq B/2$. Then the received signal $r(t)$ also has a sampled data representation of the form

$$r(t+KT) = \sum_{i=-\infty}^{\infty} r\left[\frac{i}{B} + KT\right] \text{sinc}(Bt-i)$$

So the vector $\underline{r}_K = \left\{ r(t+KT) \right\}_{i=-\infty}^{\infty}$ can be replaced by

$$\underline{r}_K = \left\{ r\left[\frac{i}{B} + KT\right] \right\}_{i=-\infty}^{\infty} \quad (3.3)$$

The optimization problem is identical and if infinite-length

transversal filters are used to realize the forward and backward filters, the optimum solutions correspond to the transfer function solutions determined in Chapter 2. The difference is that the forward filter can now be synthesized by one transversal filter with tap spacing equal to the Nyquist interval $1/B$.

The optimum solution determined from eqn. (2.37) depends on the correlation matrix

$$\overline{\underline{V}_K \underline{V}_K^T} = \begin{bmatrix} \overline{\underline{r}_K \underline{r}_K^T} & \overline{-\underline{r}_K \underline{s}_K^T} \\ \overline{-\underline{s}_K \underline{r}_K^T} & \overline{\underline{s}_K \underline{s}_K^T} \end{bmatrix} \quad (3.4)$$

being non-singular. The quadratic form associated with eqn. (3.4) is

$$\begin{aligned} QF &= \underline{u}^T \overline{\underline{r}_K \underline{r}_K^T} \underline{u} - 2\underline{u}^T \overline{\underline{r}_K \underline{s}_K^T} \underline{w} + \underline{w}^T \overline{\underline{s}_K \underline{s}_K^T} \underline{w} \\ &= (\underline{u}^T \overline{\underline{r}_K} - \underline{w}^T \overline{\underline{s}_K})^2 \geq 0 \end{aligned} \quad (3.5)$$

Thus $\overline{\underline{V}_K \underline{V}_K^T}$ is at least non-negative definite.

To prove positive definiteness, consider the random process

$$\underline{r}_K = \sum_{i=-\infty}^{\infty} u_i r[KT+i/B] - \sum_{i=-\infty}^{\infty} w_i s_{K-i} \quad (3.6)$$

or equivalently

$$A_K = \underline{u}' r_K - \underline{w}' S_K$$

This random process is stationary since both of its component processes are stationary. If the power spectrum is non-zero in any frequency region for arbitrary $||\underline{u}||^2 + ||\underline{w}||^2 > 0$, QF is strictly positive and eqn. (3.4) is positive definite. The process $r(t)$ has an additive noise component with non-zero spectrum over the entire band of interest. Also the source correlation in the real problem is finite in extent and the source spectrum has energy at all frequencies. Thus the QF must be positive unless the process \underline{r}_K and \underline{S}_K are linearly related. But \underline{r}_K has a noise component which is independent of the source digits, so a linear relation of that form cannot exist. Thus $\overline{\underline{V}_K \underline{V}_K'}$ is positive definite.

The positive definiteness of $\overline{\underline{V}_K \underline{V}_K'}$ not only guarantees that the inverse matrix solution to eqn. (2.37) exists, but also insures that a gradient algorithm will converge if the step size α is chosen small enough. A gradient algorithm for a MMSE receiver takes the form

$$\underline{f}_{n+1} = \underline{f}_n - \alpha [\overline{\underline{V}\underline{V}'} \underline{f}_n - \overline{\underline{V}_n \underline{S}_n}] \quad (3.7)$$

where \underline{f}_n is the received vector at the n th iteration and the term in brackets is equal to one half the gradient with

respect to \underline{f}_n of the MSE expression (2.34). From the expression for the error process, (3.7) can be cast into

$$\underline{f}_{n+1} = \underline{f}_n - \alpha \underline{V}^T \underline{e}_n \quad (3.8)$$

In terms of the forward and backward filter components, eqn. (3.8) becomes

$$\underline{y}_{n+1} = \underline{y}_n - \underline{V}^T \underline{e}_n \quad (3.9)$$

$$\underline{b}_{n+1} = \underline{b}_n + \alpha \underline{S}^T \underline{e}_n \quad (3.10)$$

The vector \underline{r} represents the input to the forward filter and \underline{S} represents the input to the backward filter. The components of \underline{r} and \underline{S} are the tap values of the respective forward and backward transversal filters. Thus the simple algorithms (3.9) and (3.10) are implemented by simply correlating the tap values with the error process and incrementing the corresponding tap gains. From the analysis in Chapter 2 the algorithms will converge if α is chosen so that

$$\rho(\underline{V} \underline{V}^T) < \frac{2}{\alpha} \quad (3.11)$$

where $\rho(\cdot)$ represents the largest magnitude eigenvalue of its argument matrix. In equation (3.8) tap gains are updated after reception of few say L digits.

The algorithm (3.8) has been analysed by Monsen [19] who determined convergence conditions, the performance neighborhood and convergence rate. The performance neighbourhood is measured by a quantity M called misadjustment which is the ratio of the steady state excess mean-square error to the MMSE, i.e.

$$M = \lim_{n \rightarrow \infty} \frac{1}{\beta} \langle (f_n' v_n - s_n)^2 \rangle$$

where the MMSE is $\beta = 1 - \langle VS \rangle' \langle VV' \rangle^{-1} \langle VS \rangle$. For good data performance it is generally necessary to have a small misadjustment, i.e. $M \ll 1$.

Monsen showed that the best choice of averaging interval is $L = 1$, i.e., no averaging at all. Thus the algorithm reduces to

$$\underline{f}_{n+1} = \underline{f}_n - \alpha \underline{v}_n e_n \quad (3.11)$$

which in terms of forward and backward taps become

$$\underline{y}_{n+1} = \underline{y}_n - \alpha \underline{r}_n e_n \quad (3.12)$$

$$\underline{b}_{n+1} = \underline{b}_n + \alpha \hat{\underline{s}}_n e_n \quad (3.13)$$

The forward filter is transversal filter with tap spacing equal to $1/B$ where $B/2$ is the channel bandwidth. The forward filter output at time nT is given by

$$Y_n = \int_{-\infty}^{\infty} \gamma_n(t) r(nT+t) dt = \frac{1}{B} \sum_{i=-\infty}^{\infty} \gamma_n \left[\frac{i}{B} \right] r \left[nT + \frac{i}{B} \right] \quad (3.14)$$

which can be written as

$$Y_n = \underline{\gamma}_n' \underline{r}_n \quad (3.15)$$

The forward-filter output has the output of the backward filter subtracted from it. The backward filter is also a transversal filter with tap spacing T and tap gains b_i . Its input is the reconstructed data sequence $\{\hat{S}_k\}$ which is assumed to approximate the transmitted sequence $\{S_k\}$.

The backward-filter output can be written as

$$Z_n = \sum_i b_i \hat{S}_{n-i} = \underline{b}' \hat{\underline{S}}_n \quad (3.16)$$

Thus the filter tap gains are updated by simply incrementing the present value as a fraction of the product of the tap voltage and error sample at that instant. The error voltage at time nT is given by

$$e_n = Y_n - Z_n - \hat{S}_n \quad (3.17)$$

The receiver configuration just described is shown in Fig. 3.1. In addition to reducing noise and intersymbol

$$Y_n = \int_{-\infty}^{\infty} \gamma_n(t) r(nT+t) dt = \frac{1}{B} \sum_{i=-\infty}^{\infty} \gamma_n \left[\frac{i}{B} \right] r \left[nT + \frac{i}{B} \right] \quad (3.14)$$

which can be written as

$$Y_n = \underline{\gamma}'_n \underline{r}_n \quad (3.15)$$

The forward-filter output has the output of the backward filter subtracted from it. The backward filter is also a transversal filter with tap spacing T and tap gains b_i . Its input is the reconstructed data sequence $\{\hat{S}_K\}$ which is assumed to approximate the transmitted sequence $\{S_K\}$.

The backward-filter output can be written as

$$Z_n = \sum_i b_i \hat{S}_{n-i} = \underline{b}' \hat{\underline{S}}_n \quad (3.16)$$

Thus the filter tap gains are updated by simply incrementing the present value as a fraction of the product of the tap voltage and error sample at that instant. The error voltage at time nT is given by

$$e_n = Y_n - Z_n - \hat{S}_n \quad (3.17)$$

The receiver configuration just described is shown in Fig. 3.1. In addition to reducing noise and intersymbol

interference, the receiver has some additional advantages. Since the forward-filter tap spacing is equal to the Nyquist interval, the algorithm can adapt to changes in transmission delay. Thus, timing jitter introduced by changes in transmission delay can be eliminated because the delay variations are less than the adaptation rate required.

3.3 DATA RATE:

The fibre transmission medium has a finite dispersion for the propagating optical pulse as discussed in Chapter 1, and a finite loss rate for the optical transmitted power. These both limit the data rate that can be transmitted as the photo-detector requires a certain minimum signal power for a given error probability and data rate. Semiconductor laser or LED sources have limited output power of the order of 2 mW for laser and 100 μ W for LED that can be coupled into the fibre. These facts taken together restrict the fibre length one wishes to interface between the source and detector.

The Fig. 3.2 [21] shows the receiver sensitivity for PIN and APD detector digital receivers for various bit rates. The figure was calculated for an error rate of the order of 10^{-8} . The total power available to the system for

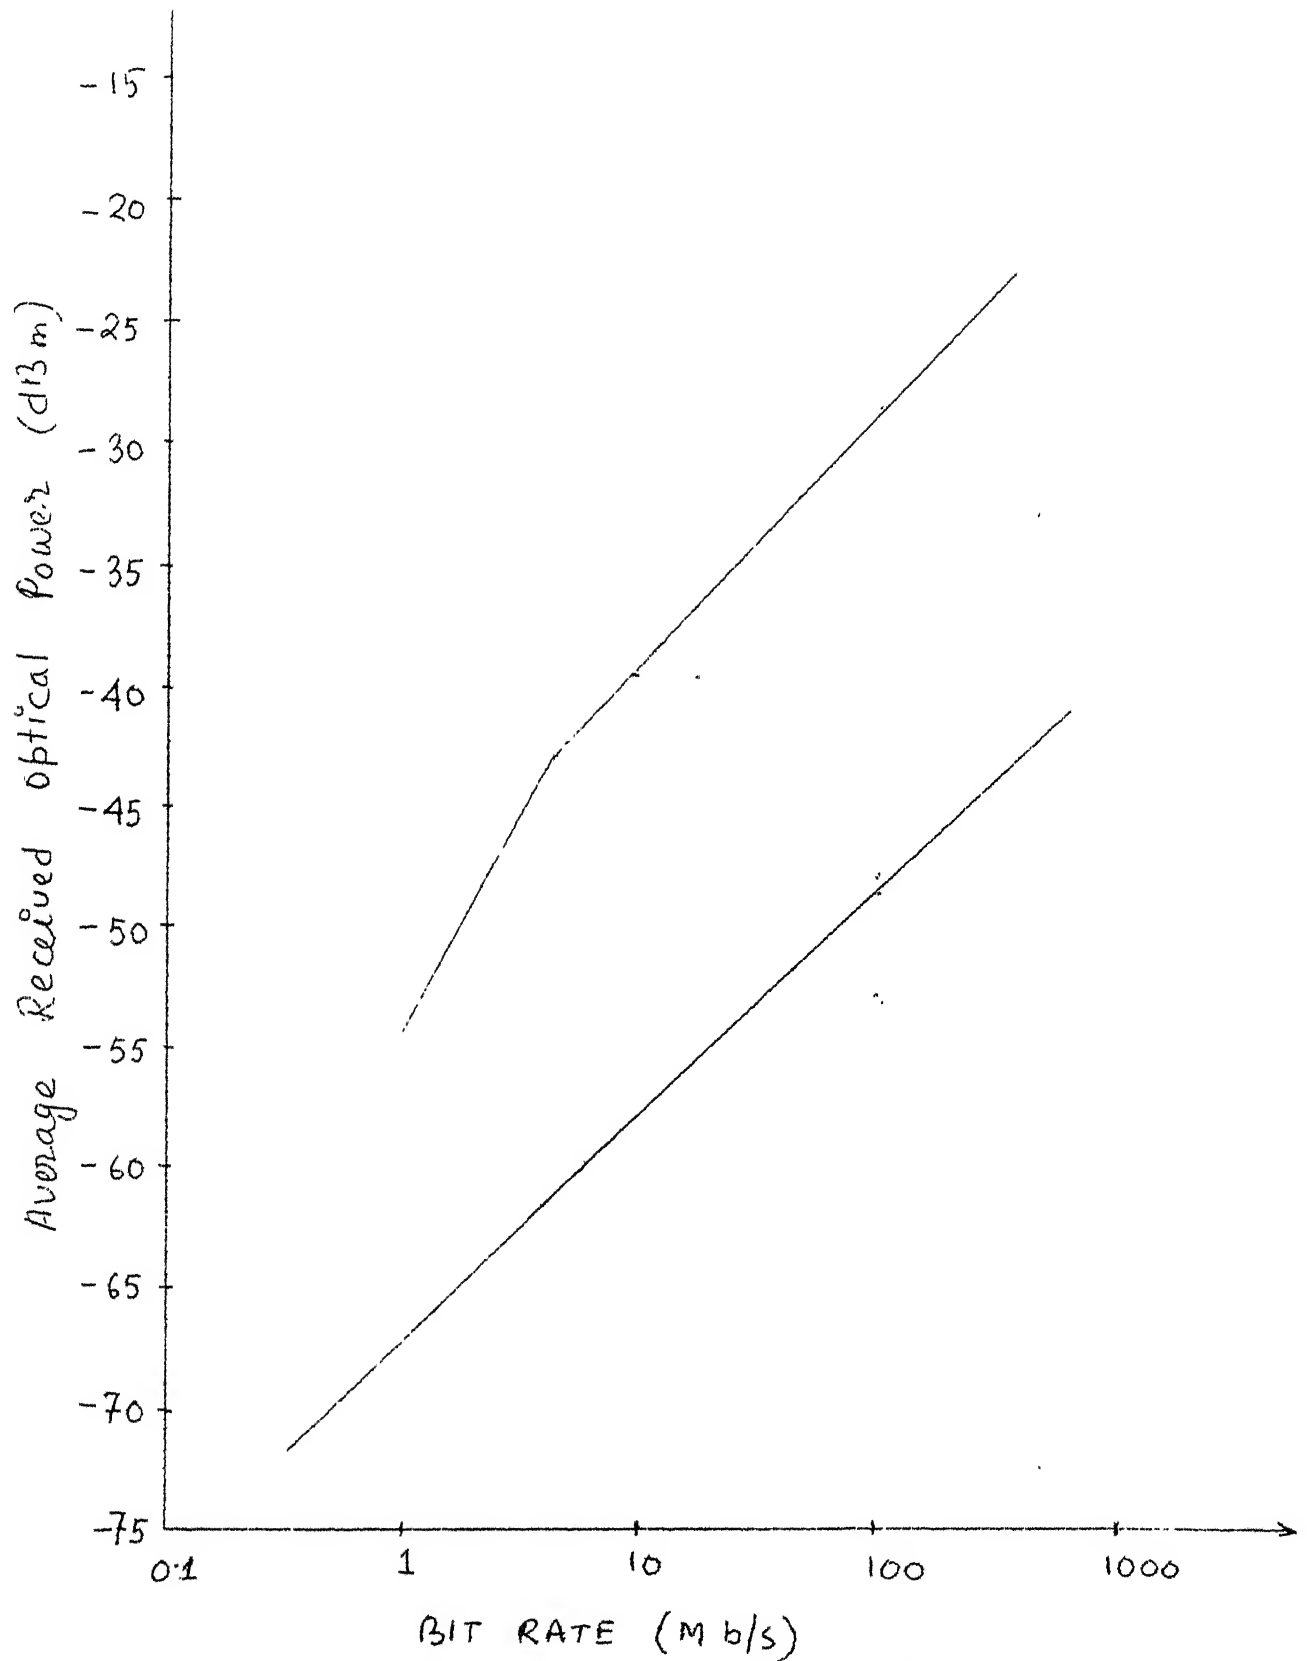


FIG 3.2 Required optical power vs Bit rate for digital system

PIN detector under the condition of Fig. 3.2 may be described as $F(T)$, and is given approximately as

$$F(T) = -110 + 4.35 \log_n (T^{-1}) \quad (3.18)$$

where 'T' is the bit interval.

This power is shared in various ways in the operating system and an operating margin must be maintained for the electronics so that small fluctuations do not effect the performance of the system. Typically a margin of 5 dB is used. The fibre itself is characterized by a loss in dB/km, and in addition, there will be power loss due to joints, mode coupling, etc.

Due to the dispersion effect the power transmitted in a given bit interval will partly arrive in the corresponding bit interval at the receiver, and the rest of the power will spill over into the nearest neighbour interval or even to more intervals depending upon the impulse response of the fibre. This overlap between the adjacent pulses, causes what has been referred to as the ISI. Thus the overall system can not be designed unless ISI is taken into account. The ISI at a finite data rate in the system could be reduced by equalization in the receiver after the detector, but only at a penalty it pays. The penalty is described by F_{ISI} and measured in decibels. Therefore,

for a given bit rate, the design equation becomes

$$F(T) = 110^{-4.35} l_n (T^{-1}) + P_L = \alpha(L) + M + F_{ISI} \quad (3.19)$$

where P_L is launched power (dBm). We will use eqn. (3.19) in the next section for link calculation.

3.4 FIBRE OPTIC DIGITAL LINK CALCULATIONS:

The Performance of the digital fibre optic link depends upon many factors, viz., source, length of fibre, attenuation constant of fibre, photodetector and coupling loss. As already explained, fibres are dispersive in nature, thus pulse propagated through the fibre will get spread in time and cause ISI. This will limit the data rate that can be transmitted over a given fibre optic link.

As discussed in Chapter 1, we have used a PIN detector for the system under study. The link calculation for the fibre optic communication system under study for different lengths and sources are given in Table 3.1. Specifications of the components used for link calculation are as follows:

a) Source:

i) Laser Diode

Output power : mW (0 dBm)

Table 3.1: Link Calculation for the F.O.C. Digital System

A. Source-Laser Diode

- i) Fibre length : 2.155 km
 ii) Fibre length : 4.310 km
 Source Power : 1 mW (0 dBm)
 Connector Insertion loss : 2 dB
 Total Power available to system:

$$F(T) = -110 + 4.35 \ln(T^{-1})$$

Data Rate in M bits/sec	100	150	200	250	300
Total power	29.87	28.10	26.85	25.88	25.09
Connector Insertion loss	2.0	2.0	2.0	2.0	2.0
Operating margin	5.0	5.0	5.0	5.0	5.0
Power available to transmission media	22.87	21.10	19.85	18.88	18.09
Fibre loss for 2.155 km (4.5 dB/km)	9.69	9.69	9.69	9.69	9.69
Power available for ISI penalty (dB)	13.18	11.41	10.16	9.19	8.40
Fibre loss for 4.310 km (4.5 dB/km)	19.39	19.39	19.39	19.39	19.39
Power available for ISI penalty (dB)	3.48	1.71	0.46	-	-

B. Source-LED

- i) Fibre length : 2.155 km
 Source Power : 50 μ W (-13.01 dBm)

Total power available to system : $F(T) = -110 + 4.35 \log(T^{-1})$

Date Rates in M bits/s	75	100	125
Total power	31.12	29.87	28.89
Coupled power to system	13.01	13.01	13.01
Connector insertion loss	2.0	2.0	2.0
Operating margin	5.0	5.0	5.0
Power available to transmission media	11.11	9.86	8.88
Fibre loss for 2.155 km	9.69	9.69	9.69
Power available for ISI penalty (dB)	1.42	0.17	-

ii) LED - IRE - 161 (LASER-DIODE)

Output Power : 50 μ W at NA = .2

Current : 100 mA

Core : 50 μ m

b) Fibre - (MG -05):

Length : 2.155 km

Attenuation: 4.5 dB/km

NA : 0.23

Core : 63 μ m

Material dispersion : 90 p.sec/km-nm

c) Connector OFP-101

Insertion loss = 1 dB

d) Detector

PIN Diode - OFDP-04 (ITT, UK)

Dark current : 0.2 nA

Sensitivity : As shown in Fig. 3.2 for
BER 10^{-8}

Responsivity : 0.5 A/W

It is assumed that the connector insertion loss is same for the laser diode and the LED. Also connector loss for the two sections of fibre is assumed to be negligible.

From the link calculations we observe that with the laser diode the system can work upto a data rate of 200 M-bit, for a fibre length of 4.310 km whereas with the LED the system can work only upto a data^{rate}/of 100 M-bits for a fibre length of 2.155 km. As for data rates higher than this there is no power available for meeting the ISI penalty. Therefore, to achieve the given BER of 10^{-8} at higher data rates, either one should use the laser diode or decrease the length of the fibre. Link calculations with a laser source for a fibre length of 2.155 km varifies the latter suggestion.

3.5 IMPULSE RESPONSE:

Impulse responses of the various parts of the fibre optical system and the overall link have been given in the following sections.

3.5.1 General:

Impulse response of an optical fibre is generally found by measurements of the delay distortion. In the system under discussion a graded index fibre is used, and the measured impulse response of the fibre provided by the manufacturer is shown in Fig. 3.3. It is assumed that the impulse response is normalized and the time is given in nano-secs. The suppliers have not given the exact value

LIBRARY
No. A 83978

Length : 2155 m
 FWHM = 2.5
 FW 10% = 6.75
 $\tau_0 = 163.70$

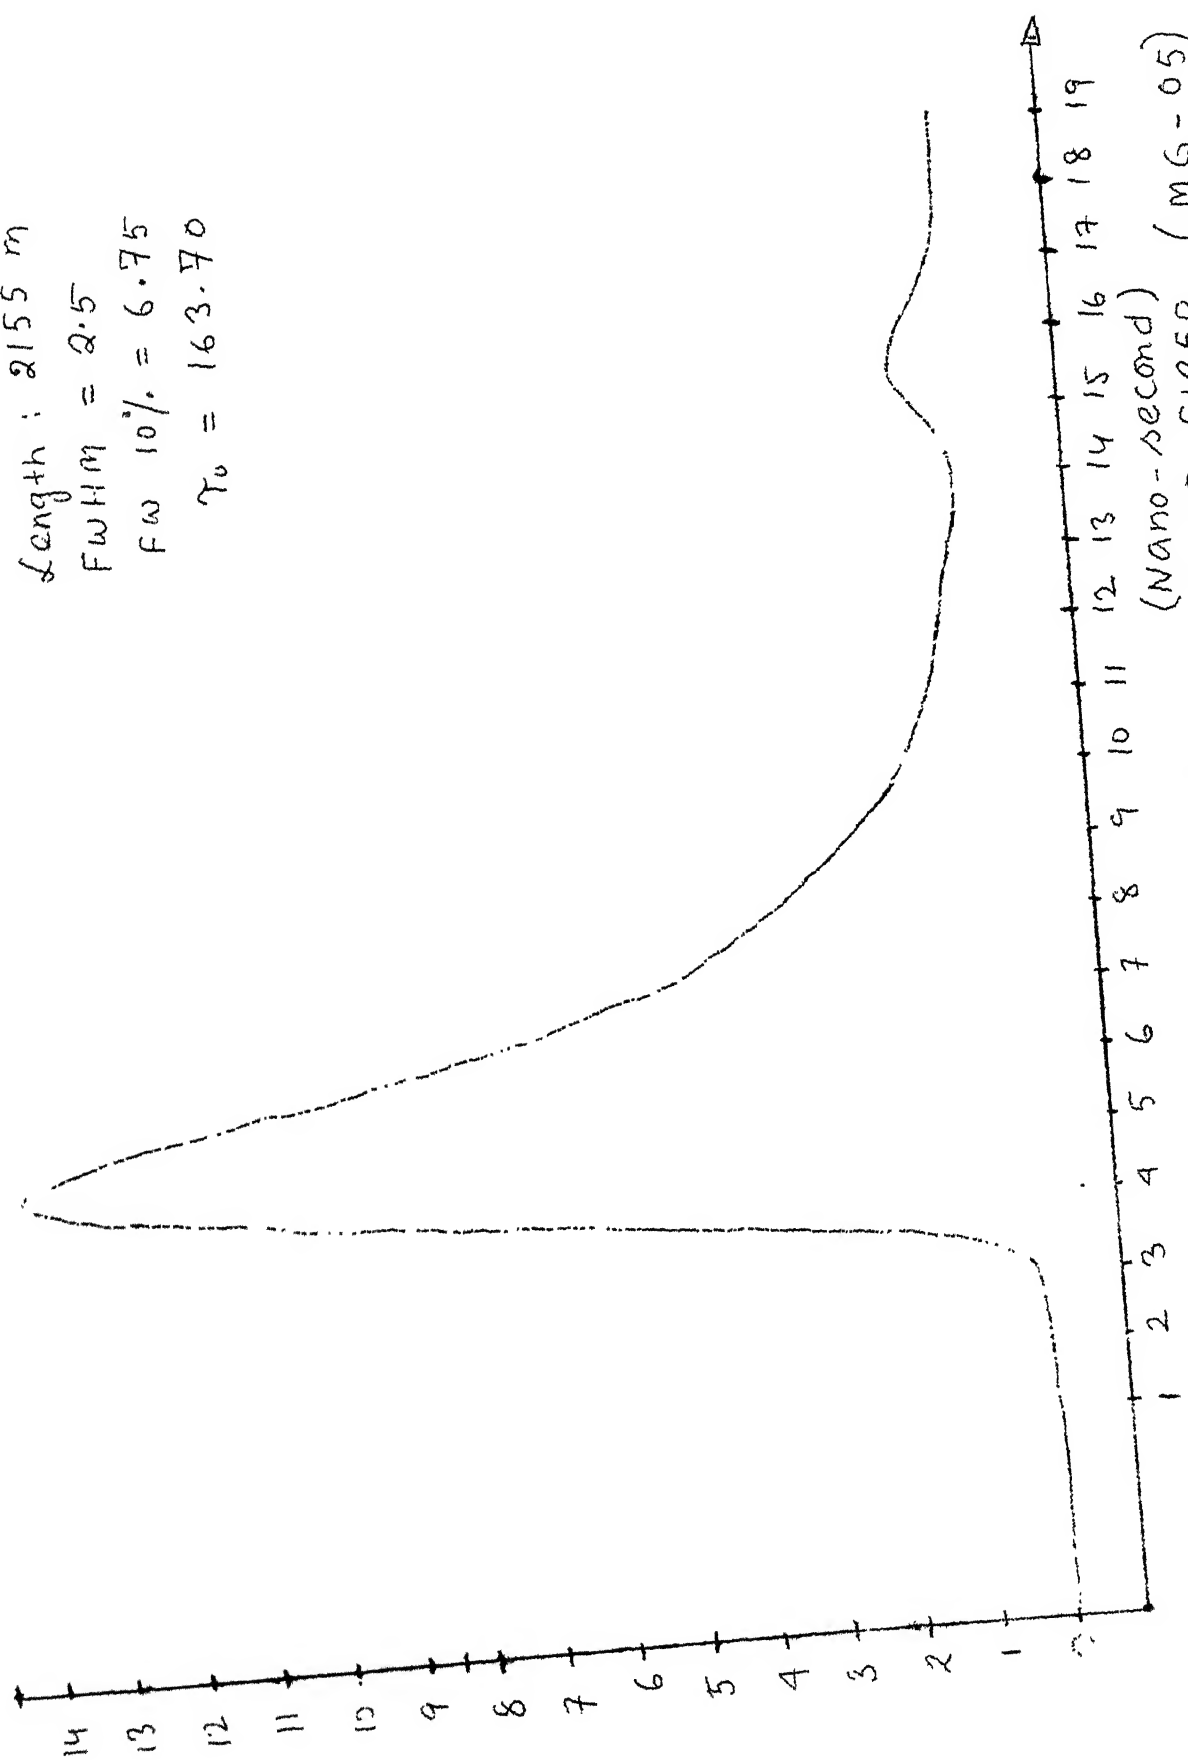


FIG 3.3

IMPULSE

RESPONSE OF FIBER (MG-05)

(Nano-second)

of the magnitude (scaling factor). The value of the scaling factor is found as follows:

We know --

$$\int_0^{\infty} (Kh)^2 t \, dt = 1 \quad \Delta t \text{ - small time interval}$$

or,

$$K^2 \sum h^2 i \Delta t = 1 \quad (3.20)$$

For calculating K, Δt is taken as 0.1 ns. and the value from calculation turn out to be 1.55×10^3 . As we have taken only a finite number of samples of the impulse response the exact value of K is 1.5×10^3 .

3.5.2 Impulse Response of the Electrical System:

The optical signals are converted to electrical signals by the PIN diode detector and then these are amplified by the pre-amplifier. As the data rates of interest are high, a high speed FET (CA 3127E) is used for the pre-amplifier circuit. The characteristic of CA3127 and the PIN diode are as under -

CA3127E

Input resistance = 400 Ω

Input capacitance = 3.7 pF

PIN Diode

Capacitance = 1 pF

The equivalent electrical circuit of the PIN diode and the pre-amplifier is given in Fig. 3.4.

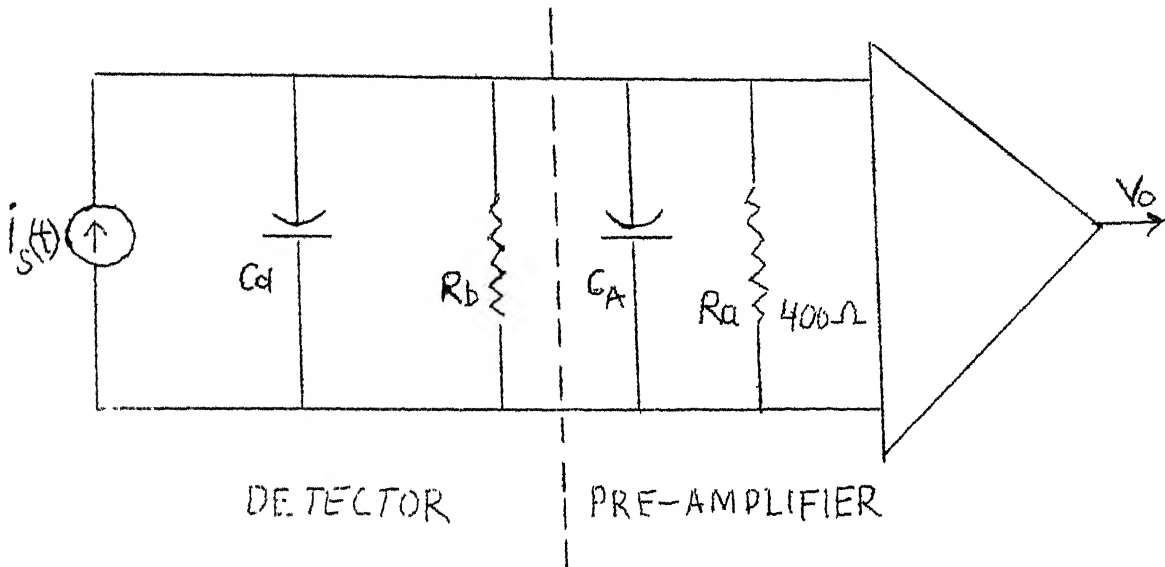


Fig. 3.4

Current due to the shot noise and dark current are not considered being negligible. The bias resistance of the photodetector is high and shunted by the 400Ω input resistance of the pre-amplifier. The resultant values of R and C of the model are

$$R = 400\Omega$$

$$C = 4.7\text{ pf}$$

The impulse response of the detector and the pre-amplifier is then

$$H(s) = \frac{V_2(s)}{V_1(s)} = \frac{R \cdot \frac{1}{C_s}}{R + \frac{1}{C_s}} = \frac{\frac{1}{C}}{s + 1/R_C} \quad (3.21)$$

$$h(t) = 1/C \cdot e^{-1/R_C t} \quad (3.22)$$

Impulse response of the equivalent circuit is plotted as shown in Fig. 3.5.

3.5.3 Impulse Response of the System:

To evaluate the performance of the DFE, the total impulse response of the system is considered. The fibre optical communication links under consideration are as follows:

- a) Source-Laser Diode, Detector-PIN Diode Link length = 2.155 km
- b) Source-LED, Detector-PIN Diode, link length = 2.155 km
- c) Source-Laser Diode, Detector-PIN Diode Link length = 4.310 km
- a) Laser-PIN Combination, Length = 2.155 km:

The material dispersion of the graded index fibres is 90 p.secs/km. -nm. It is assumed that the spectral width of the laser is 2 nm. Thus the total material dispersion due to the laser is very small, i.e., 0.45 nsecs. Therefore, the effect of material dispersion due to the

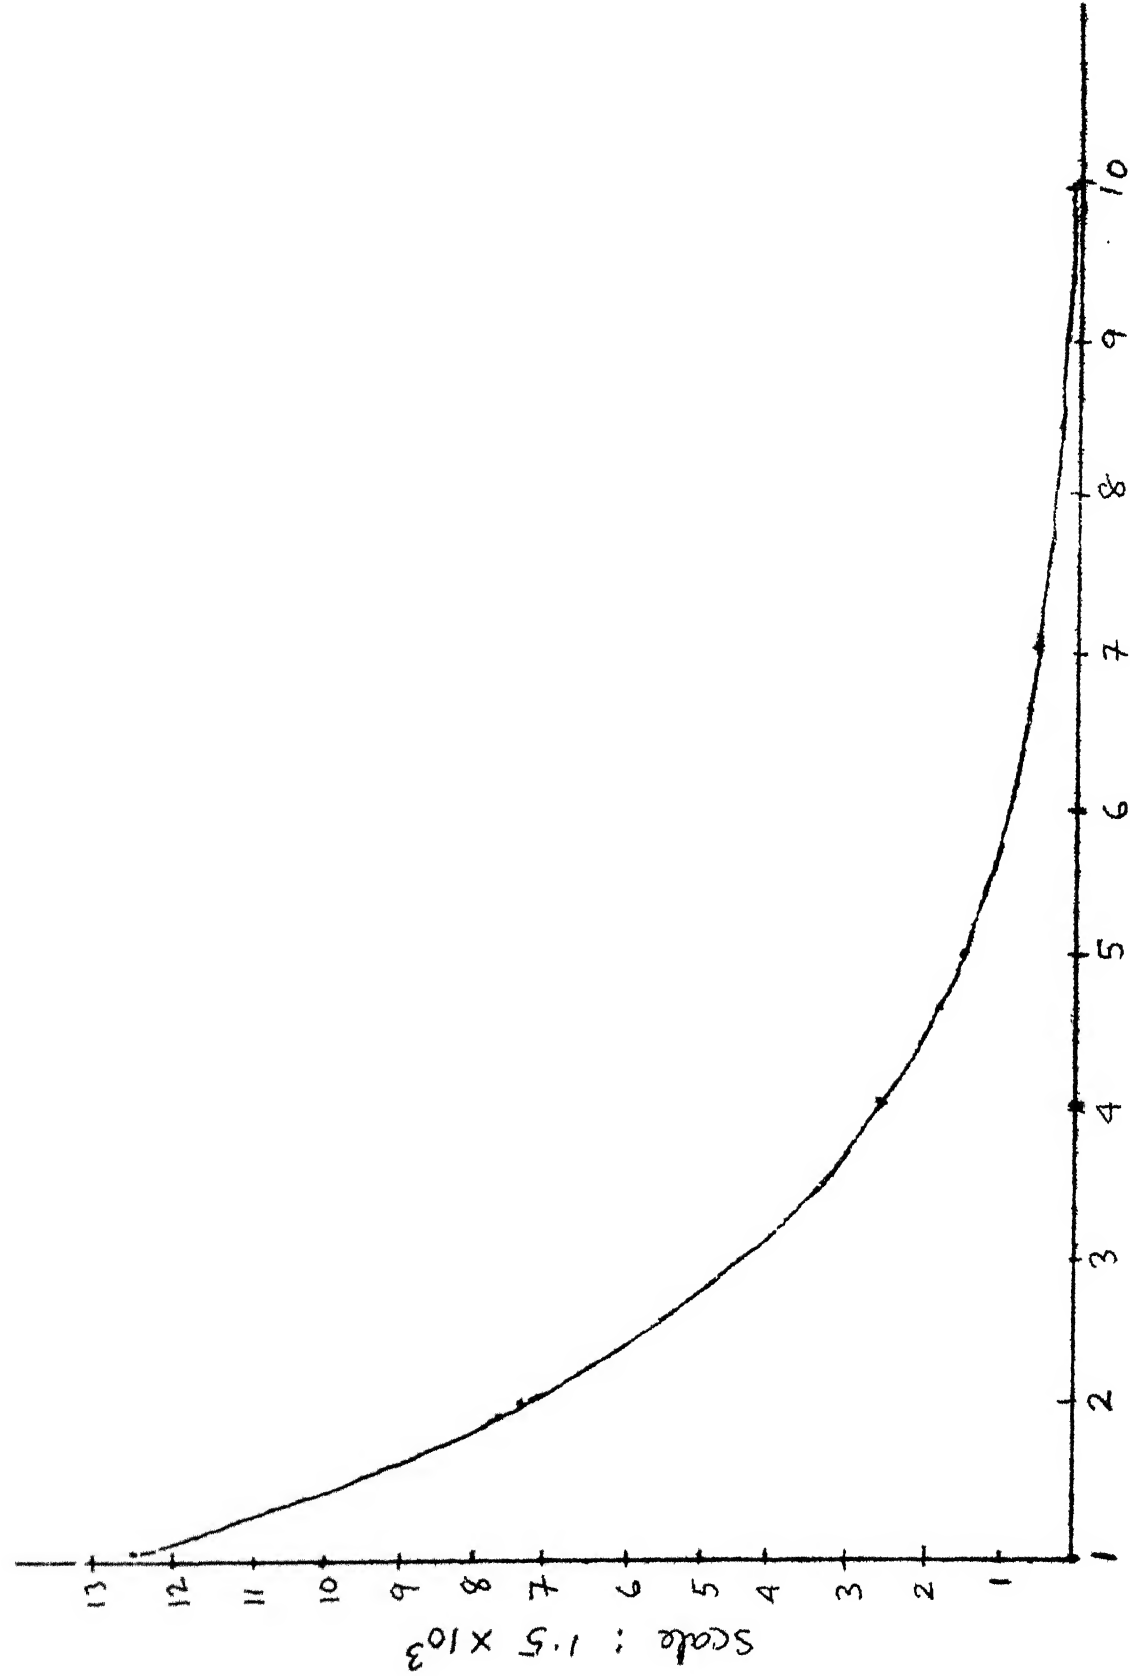


FIG 3.5 IMPULSE RESPONSE OF ELECTRICAL CIRCUIT

source in this case is neglected while calculating the total impulse response of the system. We know the impulse response of the fibre and the electrical circuit (detector + pre-amplifier). The total impulse response is found by convolving the two impulse responses. The total normalized impulse response is shown in Fig. 3.6.

b) LED-PIN Combination Length = 2.155 km:

Optical fibre properties depend upon the wavelength λ of a light source, i.e., $g(t) = g(t, \lambda)$, where $g(t)$ is the impulse response of the fibre. The spectral width of the LED is 40 nm. Therefore, the material dispersion will be much more compared to the laser source. The LED, IRE-161 of Laser Diode Lab. is used in the fibre optic communication link under discussion. The output spectrum of the light source is as shown in Fig. 3.7.

The resultant pulse response of the fibre link is [22]

$$g_r(t) = \int_{-\infty}^{\infty} p(\lambda)g(t, \lambda)d\lambda \quad (3.23)$$

where $p(\lambda)$ is high source spectrum.

The resultant impulse response is shown in Fig. 3.8. If $p(\lambda)$ is not available for a LED, we can use equation (3.24) where a Gaussian intensity spectrum for the LED has been assumed.

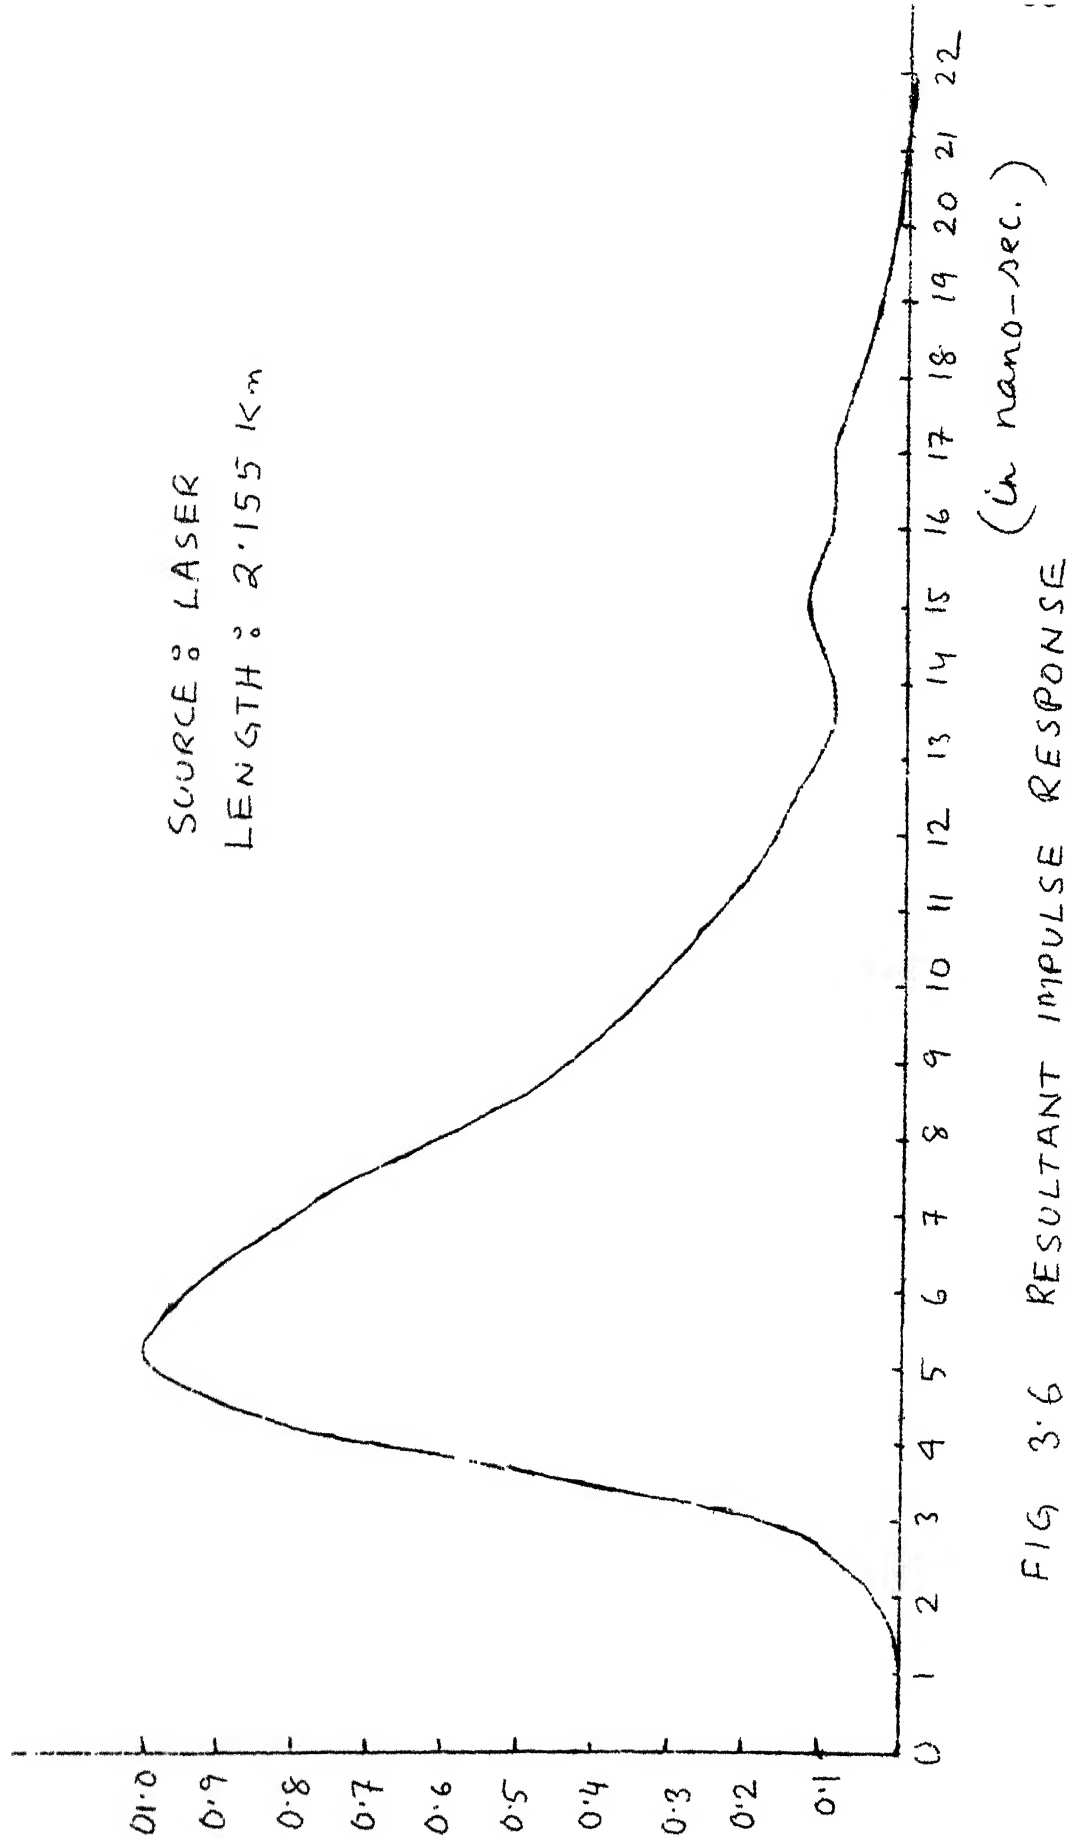


FIG 3.6 RESULTANT IMPULSE RESPONSE

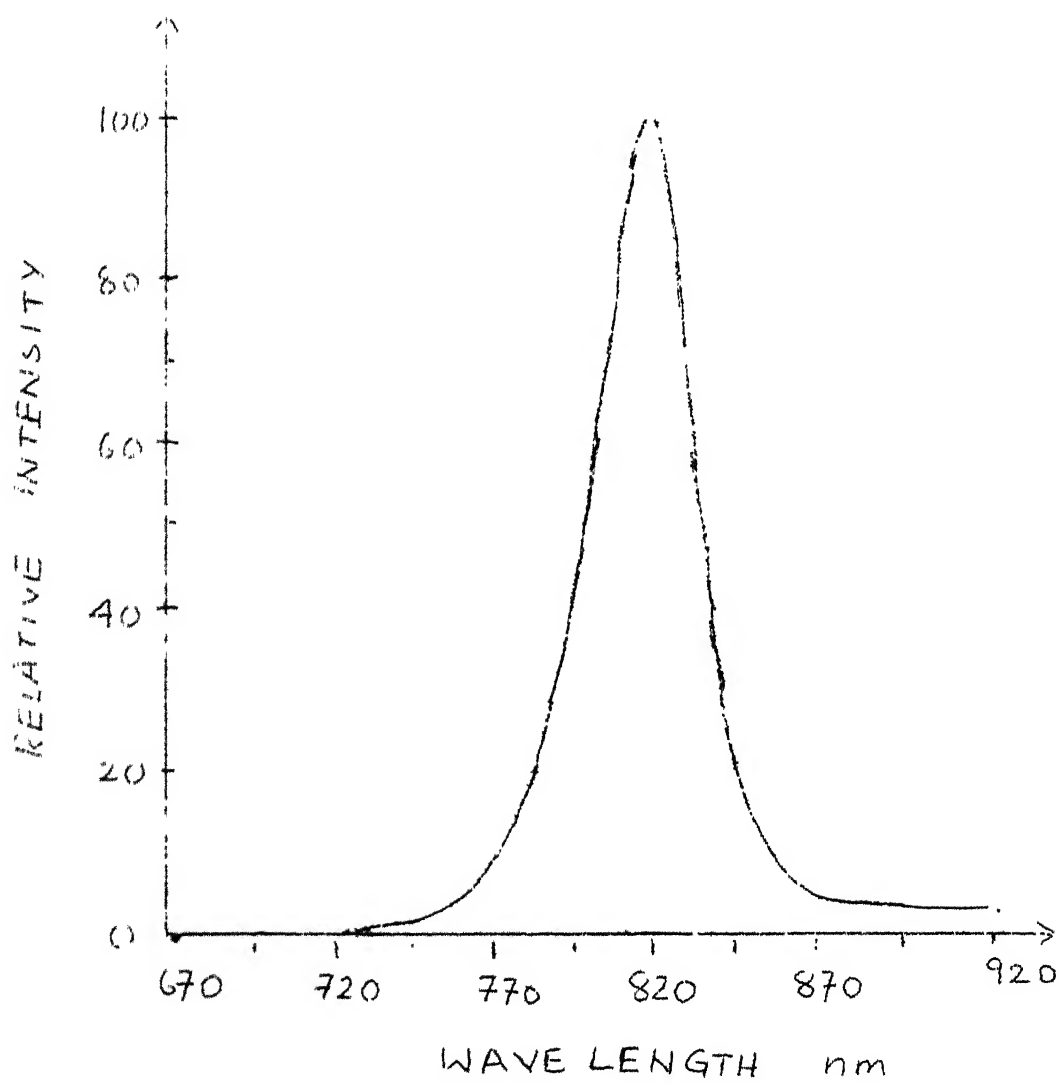


FIG 3.7 OUTPUT SPECTRA

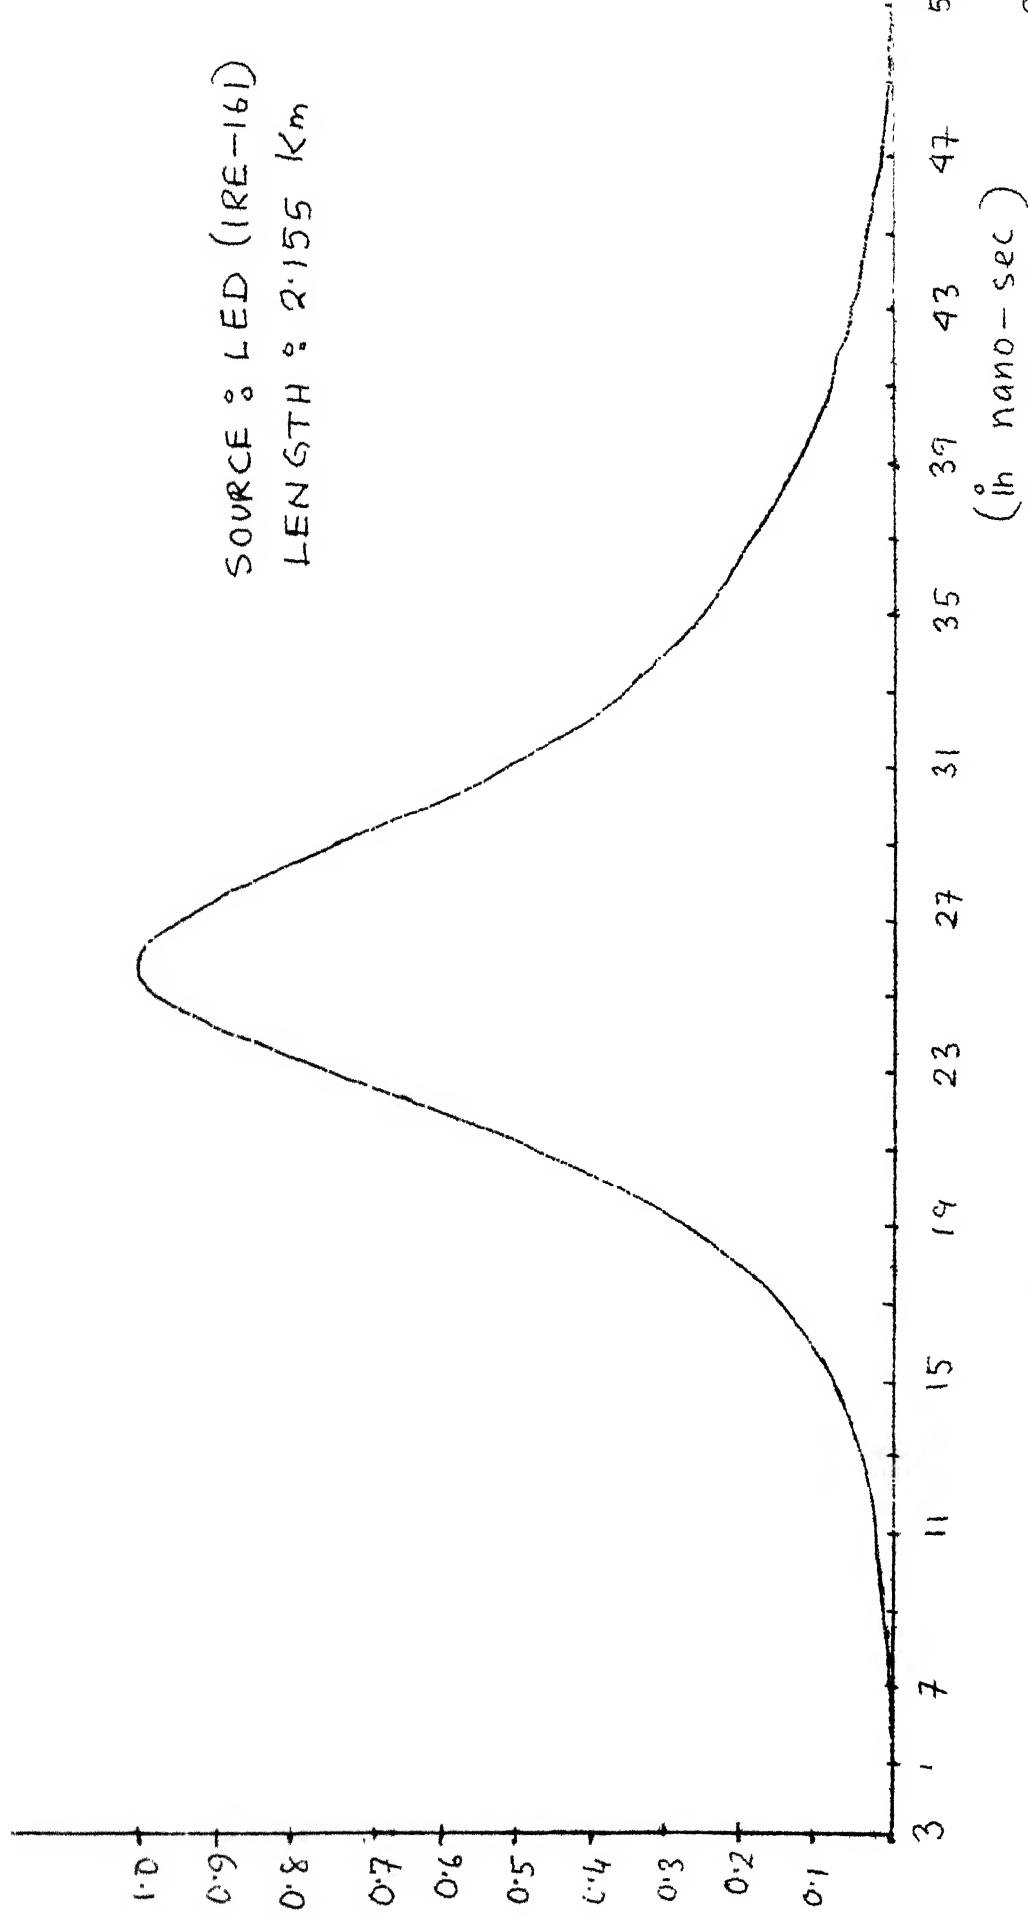


FIG 3.8 RESULTANT IMPULSE RESPONSE

$$G_m(f) = \exp \left\{ -\frac{1}{2} \cdot (2\pi fML\sigma)^2 \right\}$$

or,

$$g_m(t) = \frac{1}{\sqrt{2\pi ML\sigma}} \exp \left\{ -\frac{1}{2} (t/ML\sigma)^2 \right\} \quad (3.24)$$

where M = material dispersion in ps/km-nm

L = length of fibre in km

σ = spectral width of LED in nm

The overall response will then be obtained by convolving $g_m(t)$ with $g(t)$. The output spectra of the light source IRE - 161 is not Gaussian. The value of σ is found by curve fitting. It is 14 n.secs on the right hand side of the peak value and 17 n.sec. on the left hand side. In our case the resultant impulse response of the link is obtained numerically by using the actual $p(\lambda)$ as provided by the manufacturer.

The plots of Fig. 3.9 and 3.10 have been obtained using the Gaussian assumption and using values of σ of 14 and 17, respectively. The resultant impulse response shown in Fig. 3.8 corresponds to a worst case situation.

c) Laser-PIN Combination, Length = 4.310 km:

The total impulse response of the system is found by convolving the impulse response of the fibre of 2.155 km

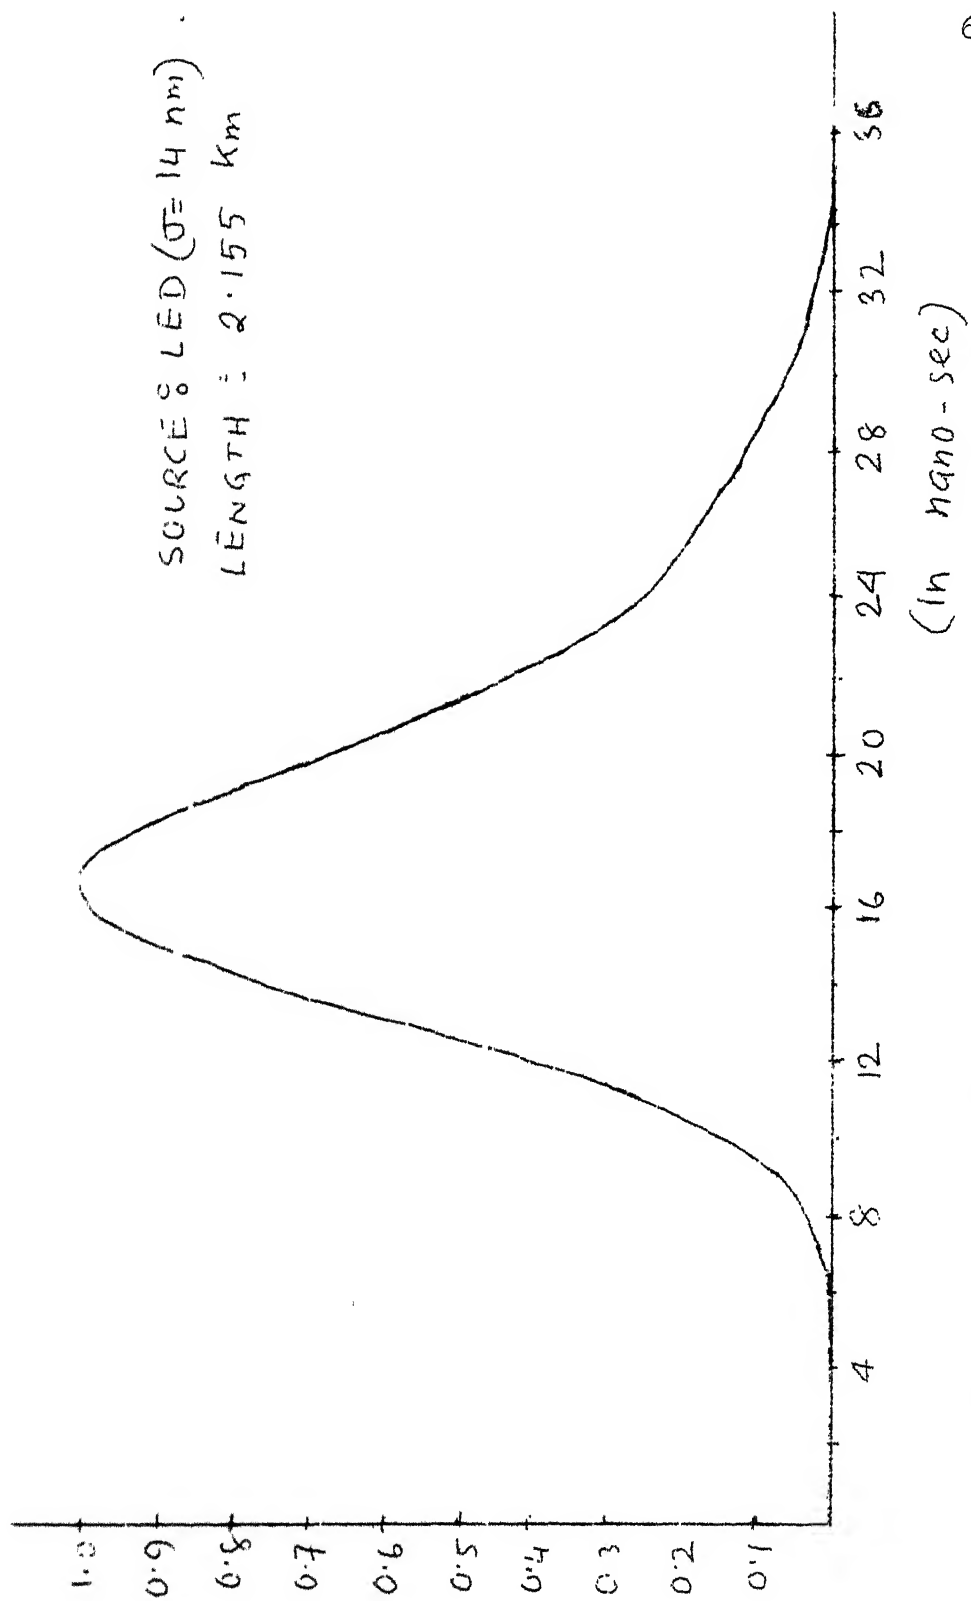


FIG 3.9 RESULTANT IMPULSE RESPONSE

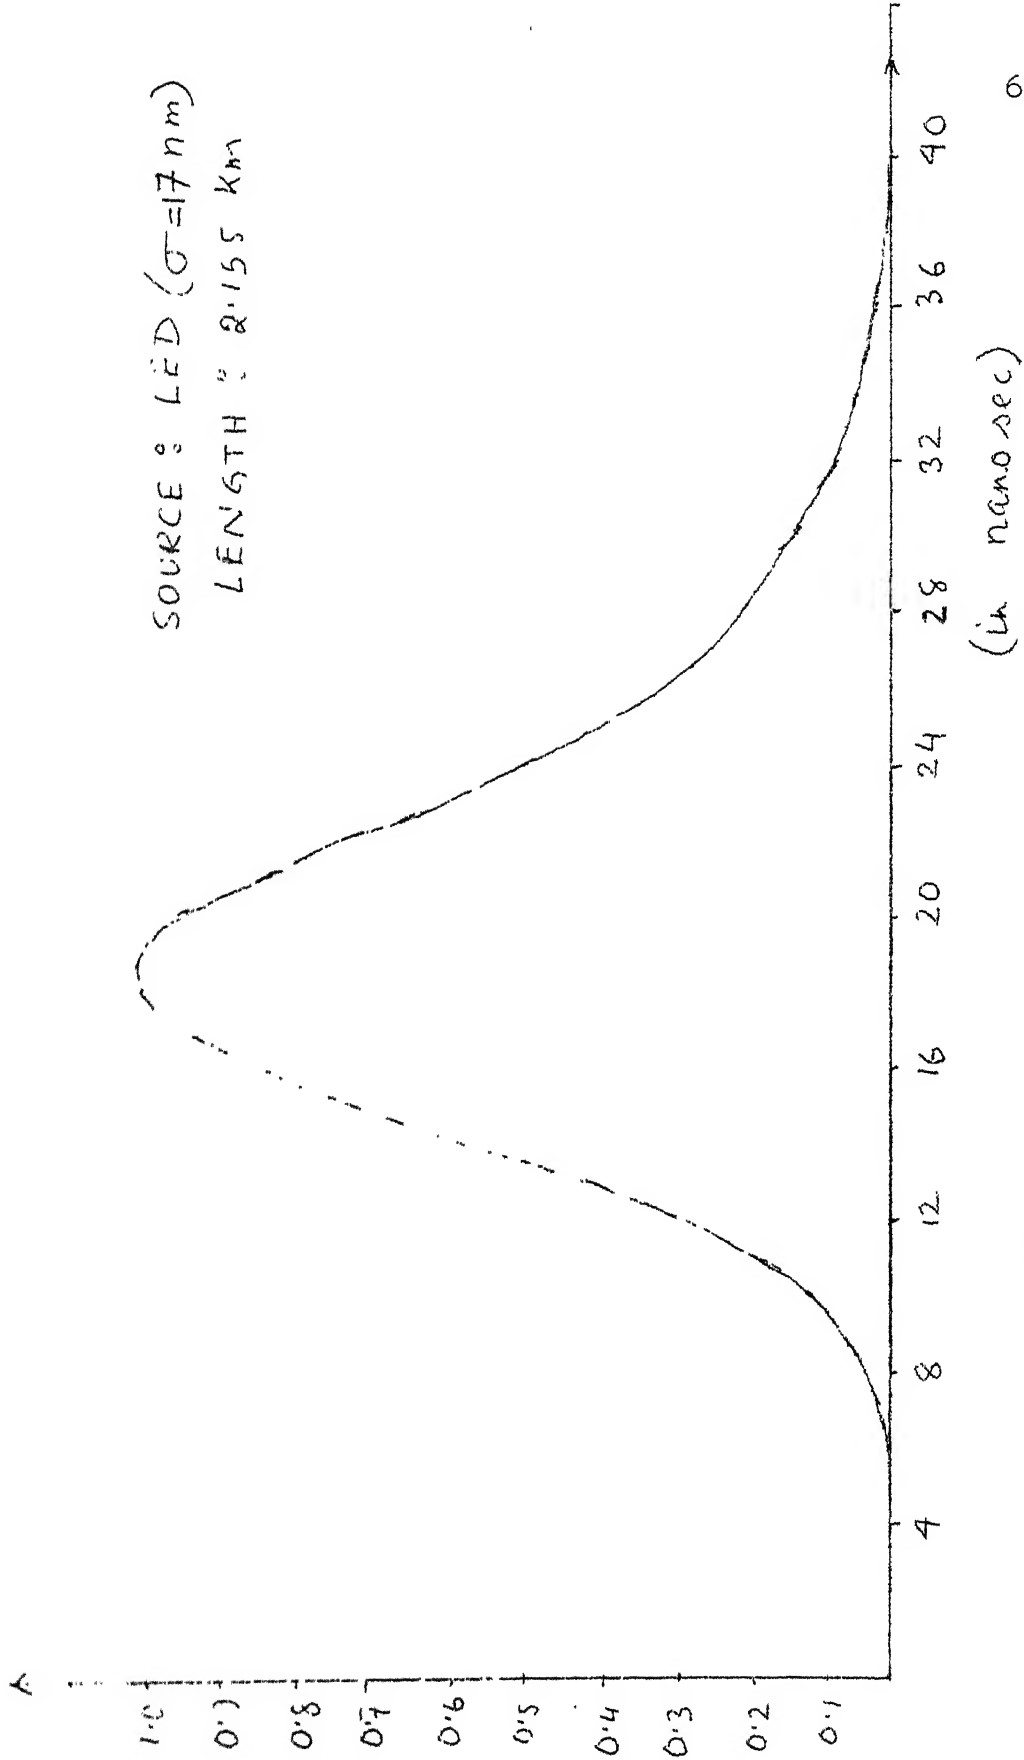


FIG 3.10 RESULTANT IMPULSE RESPONSE

length with itself and then with the electrical circuit impulse response. Total impulse response is shown in Fig. 3.11 which is used to find the probability of error of the system of fibre length 4.310 km.

3.6 CHANNEL BAND-WIDTH OF THE SYSTEM:

As discussed in Chapter 1, the system can be divided into two parts, i.e. optical and electrical.

The system under discussion have electrical as well as optical portions. The 3 dB channel bandwidth of the combined system is calculated.

It is observed from Section 3.2 if the channel is band limited to $B/2$, it is reasonable to position a filter prior to the equalizer which will also band limit the additive noise to the range $|f| \leq B/2$. Therefore one should know the channel bandwidth of the system upto the input to the equalizer.

We have the pre-amplifier before the equalizer, so the additive noise is also limited to the bandwidth of the pre-amplifier. Therefore, an additional filter to band limit the additive noise is not required.

The impulse response of the fibre or the overall system in our case is known. For the impulse response $h(t)$, $0 \leq t \leq T$, the transfer function is

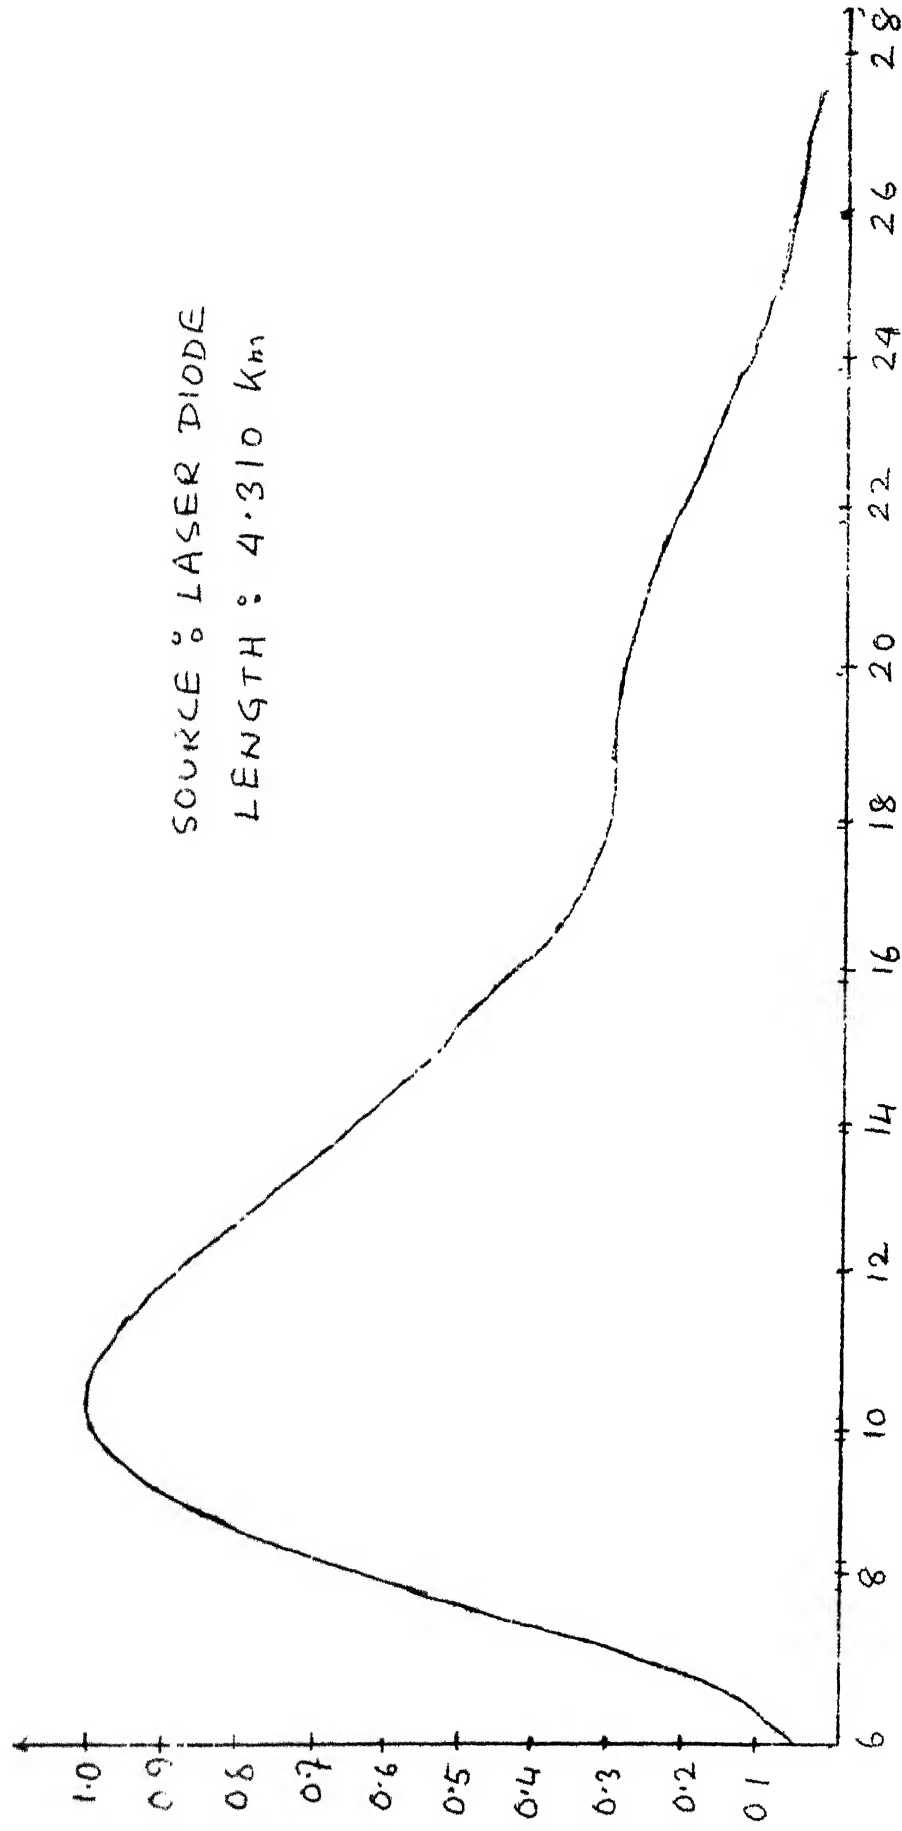


FIG 3.11 RESULTANT IMPULSE RESPONSE
(in nanosec.)

$$H(f) = \int_0^T h(t) \cos 2\pi f t dt + j \int_0^T h(t) \sin 2\pi f t dt$$

$$= A(f) + jB(f)$$

$$|H(f)|^2 = A(f)^2 + B(f)^2$$

where $A(f) = \int_0^T h(t) \cos 2\pi f t dt$ and

$$B(f) = \int_0^T h(t) \sin 2\pi f t dt$$


The integral functions are computed numerically. The 3 dB channel bandwidth is obtained from the plot of $|H(f)|^2$.

The magnitude of the transfer functions of the electrical circuit, the fibre optics, and the total system (a) are plotted in Fig. 3.12 and Fig. 3.13. The values of the 3 dB bandwidths are obtained as under:

- i) Electrical Circuit = 85 MHz
- Fibre optic = 45 MHz
- Total bandwidth of system (a) = 38 MHz
- Total bandwidth of system (b) = 24 MHz

3.7 DESIGN OF DFE:

In the following the choice of the step size (α) and the tap gain coefficients of the DFE have been dealt with in brief.

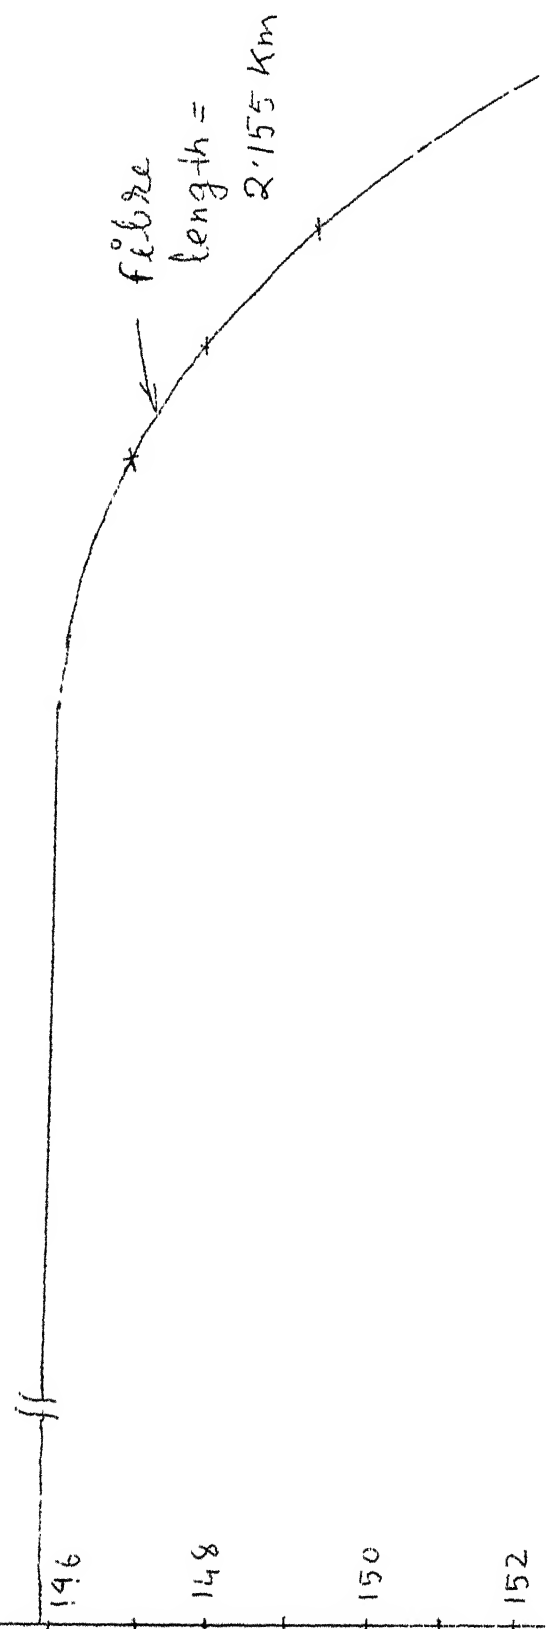

BANDWIDTH OF FIBRE

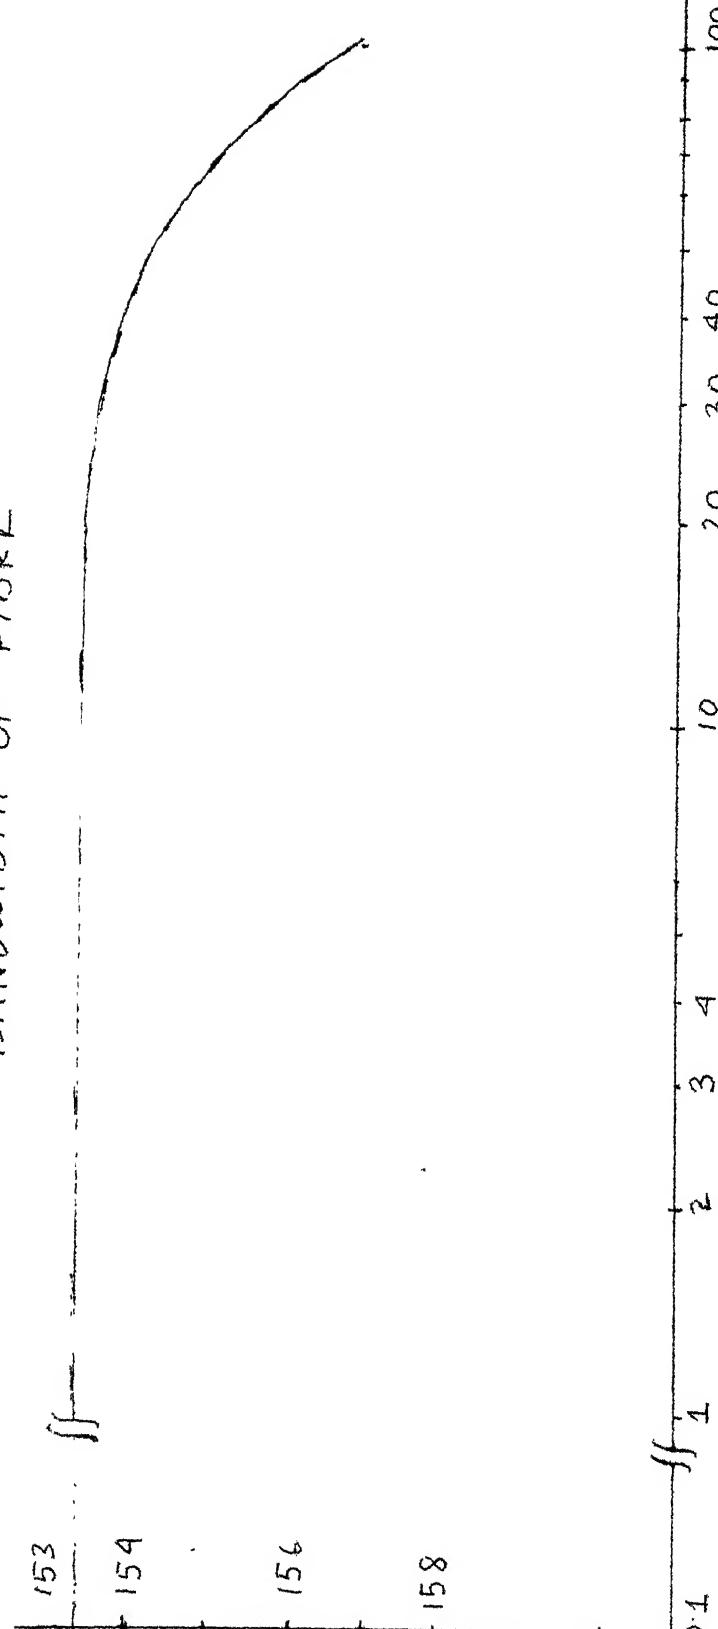


FIG 3.12 BANDWIDTH OF PREFABRICATED DETECTOR

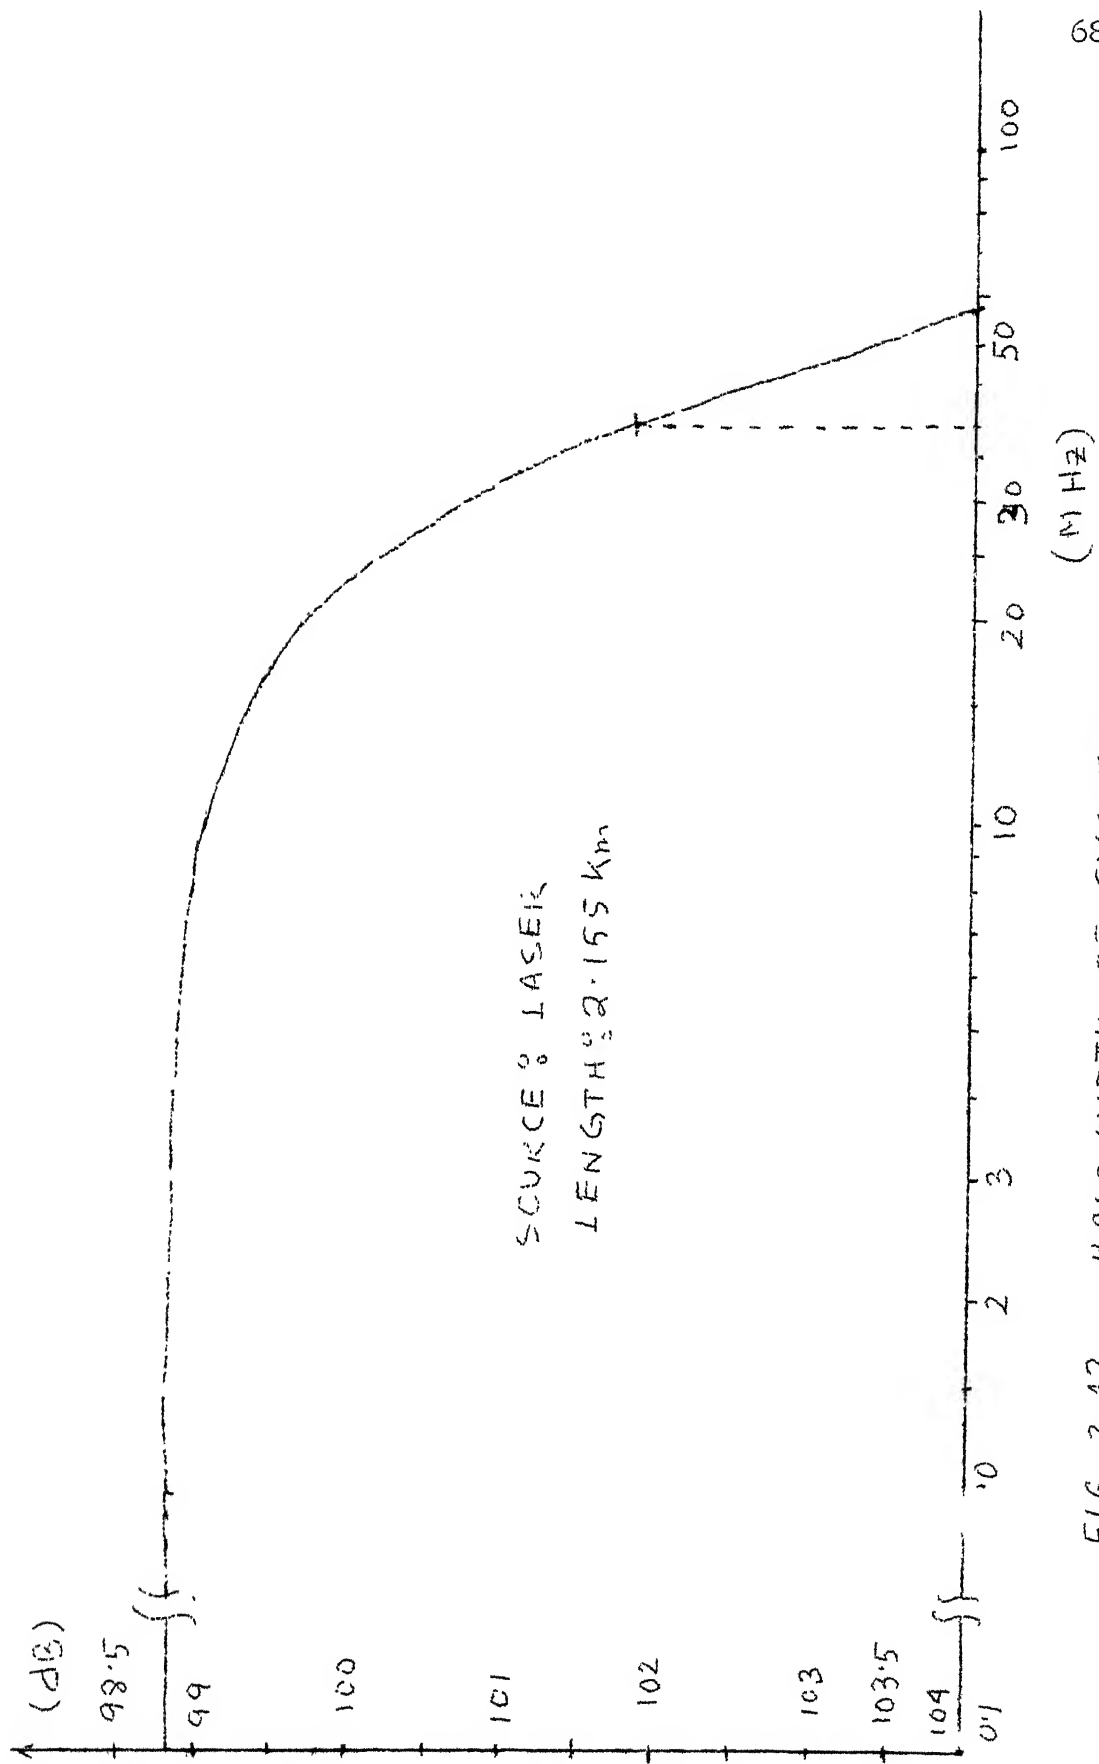


FIG 3 13 BANDWIDTH OF SYSTEM

3.7.1 Effect of Step Size (α):

The critical consideration in the choice of the algorithm parameters is to maintain a misadjustment small relative to unity.

The algorithm parameters which can be varied are the step size α and the averaging interval. We have already assumed the averaging interval to be unity. α should make the receiver tap gains move to the optimum neighbourhood from an initial setting corresponding to the absence of an equalizer. Thus the problem is to maximise the convergence rate.

While carrying out simulation on the digital computer, it is observed that if we make α larger then the probability of error is more, though convergence is faster, on the other hand if the step size is kept too small then the convergence rate is very slow. The algorithm will converge if α is chosen so that

$$f(\overline{\underline{V} \underline{V}'}) < \frac{2}{\alpha}$$

D.A. George [23] has used a value of α as low as 0.016.

In this thesis we assumed that the reconstructed data sequence has no error. Therefore, α should be so chosen that the probability of error is low. When the equalizers

tap gains can adaptively move to the optimum neighbourhood from the initial setting, the equalizer is said to have achieved lock.

In the simulation the tap gains of the forward and the backward filters are initially set to zero except for the tap corresponding to F_0 (main tap in the forward transversal filter), which is set to unity. It is noticed during the simulation that if after a number of iterations the weight of F_0 is around unity, then the best tap gain settings are achieved. But in case the value of F_0 tap converges to zero then lock is not achieved. The error rate becomes very high after a few iterations. The forward filter tap weights set to zero and backward filter tap weights set to such a value that their sum tends to be 1 or -1. In this case the reconstructed data is independent but the error, $e_K = \hat{S}_K - \hat{S}_K$ is identically zero for all times. Therefore, the selection of α is very important and should be chosen so as to achieve the lock condition. Also the tap weights of F_0 should not converge to zero. The value of F_0 should be around unity to get the best results.

3.7.2 Tap Gain Setting:

Length of transversal filter: The parameters of interest in the DFE are the number of taps in the forward filter, i.e.

$-N$ to N , the forward filter tap spacing τ and the number of taps in the backward filter, say M . The optimum DFE requires $N = \infty = M$ and $\tau = \frac{1}{B}$, where $1/B$ is the Nyquist interval. In practice the transversal filter will be of finite length.

Monsen [24] in his studies kept tap spacing for the forward filter as 66 ns (corresponding to 15 MHz), data rate between 1.5 to 12.6 M bits/sec. and three taps in the forward filters. In the system under study the channel bandwidth is about 38 MHz, and data rates much higher than the channel bandwidths are used in simulation. From the simulation studies, the following observations can be made about the number of taps and their spacing.

- i) When the forward filter taps are spaced at the symbol interval, the probability of error is less than or similar to the value obtained when the taps are spaced at the Nyquist interval.
- ii) If we keep the number of the forward taps equal to the number of future interfering samples plus one then the probability of error is smaller.
- iii) Any additional tap added in the forward filter after the main tap F_0 does not reduce the probability of error. The results are tabulated in Table 3.2.

(a) Taps at Symbol Interval

Data Rate in M Bits/sec	SNR (b)	No. of symbol processed (c)	Step size (α) (d)	Normal setting ($F_0=1$)		Different setting			Remark	
				No. of taps		No. of taps				
				Forward (e)	Feedback (f)	Error (g)	Forward (h)	Feedback (j)		Error (k)
(a)	(b)	(c)	(d)	(e)	(f)	(g)	(h)	(j)	(k)	(l)
150	6	1000	.01	1	3	22	2	3	28	$F_0=1$
150	6	1000	.01	1	3	22	3	3	30	$F_0=1$
225	6	2000	.01	2	4	60	5	4	68	$F_2=1$
150	8	2000	.01	1	3	10	3	3	13	$F_1=1$
150	8	10000	.1	1	3	91	3	3	93	$F_1=1$
225	6	2000	.01	2	4	60	4	4	69	$F_3=1$ (two taps after main)
150	8	2000	.1	1	3	10	3	3	17	$F_1=1$ (one tap before)
150	8	2000	.01	1	3	11	5	4	14	$F_3=1$ one tap c
225	6	2000	.01	2	4	60	3	4	72	$F_1=1$ main ta

(b) Taps at Symbol and Nyquist interval

150	6	1000	.01	1	3	22	2	3	26	Forward tap (
150	8	2000	.01	1	3	10	5	3	12	Nyquist inter
150	8	10000	.1	1	3	91	5	3	103	$F_2=1$
150	4	1000	.01	1	3	39	2	3	43	$F_2=1$
225	6	2000	.01	2	4	60	2	4	65	$F_0=1$

CHAPTER 4

SIMULATION OF DFE AND RESULTS

4.1 GENERAL:

To evaluate the performance of DFE, the actual system is simulated on the DEC-1090 system. The overall impulse responses of the link are considered for the simulation of the system. The simulation consists of finding the tap gain weights for the forward and backward transversal filters and then using these tap gain weights to find the probability of error at different data rates for various SNR values. The probability of error is determined for 2.155 km and 4.310 km link lengths for SNR values from 6 dB to 14 dB. Performance of the DFE for these link lengths is evaluated considering the different optical sources, i.e., laser — diode and LED. Maximum data rates possible for a certain probability of error without an equalizer have also been found.

For simulation random numbers with uniform distribution (data) and Gaussian distribution with zero mean (noise) are generated by NAG sub-routine. The uniformly distributed random numbers are convolved with the total impulse response of the system, and the Gaussian noise after convolving with the pre-amplifier and detector impulse response is added to it. Now the signal is fed to the DFE.

Signal flow diagram for the simulation is shown in Fig. 4.1. Error signal e_K is used to update the tap weights during the adaptation process. Once the tap weights of the DFE are fixed, error signal e_K is not used.

4.2 SIMULATION RESULTS:

4.2.1 Source-Laser, Fiber Length = 2.155 km:

The simulation is carried out in two parts. First we find the optimum tap weights for the forward and backward filters for the different data rates at various SNR values by the adaptive method. As discussed in Chapter 3, the forward filter having number of taps equal to the future interference samples plus one and spaced at the symbol interval is considered in evaluating the optimum tap weights and the probability of error. For various values of SNR the noise variance and the standard deviation is given in Table 4.1.

The optimum tap weights are determined by carrying out a number of simulations with different values of step size and then freezing the values of the tap weights at different iteration numbers. The tap weights which correspond to the minimum number of errors in the above simulation is used to find the probability of error of the system. The results from one such simulation are given in Table 4.2.

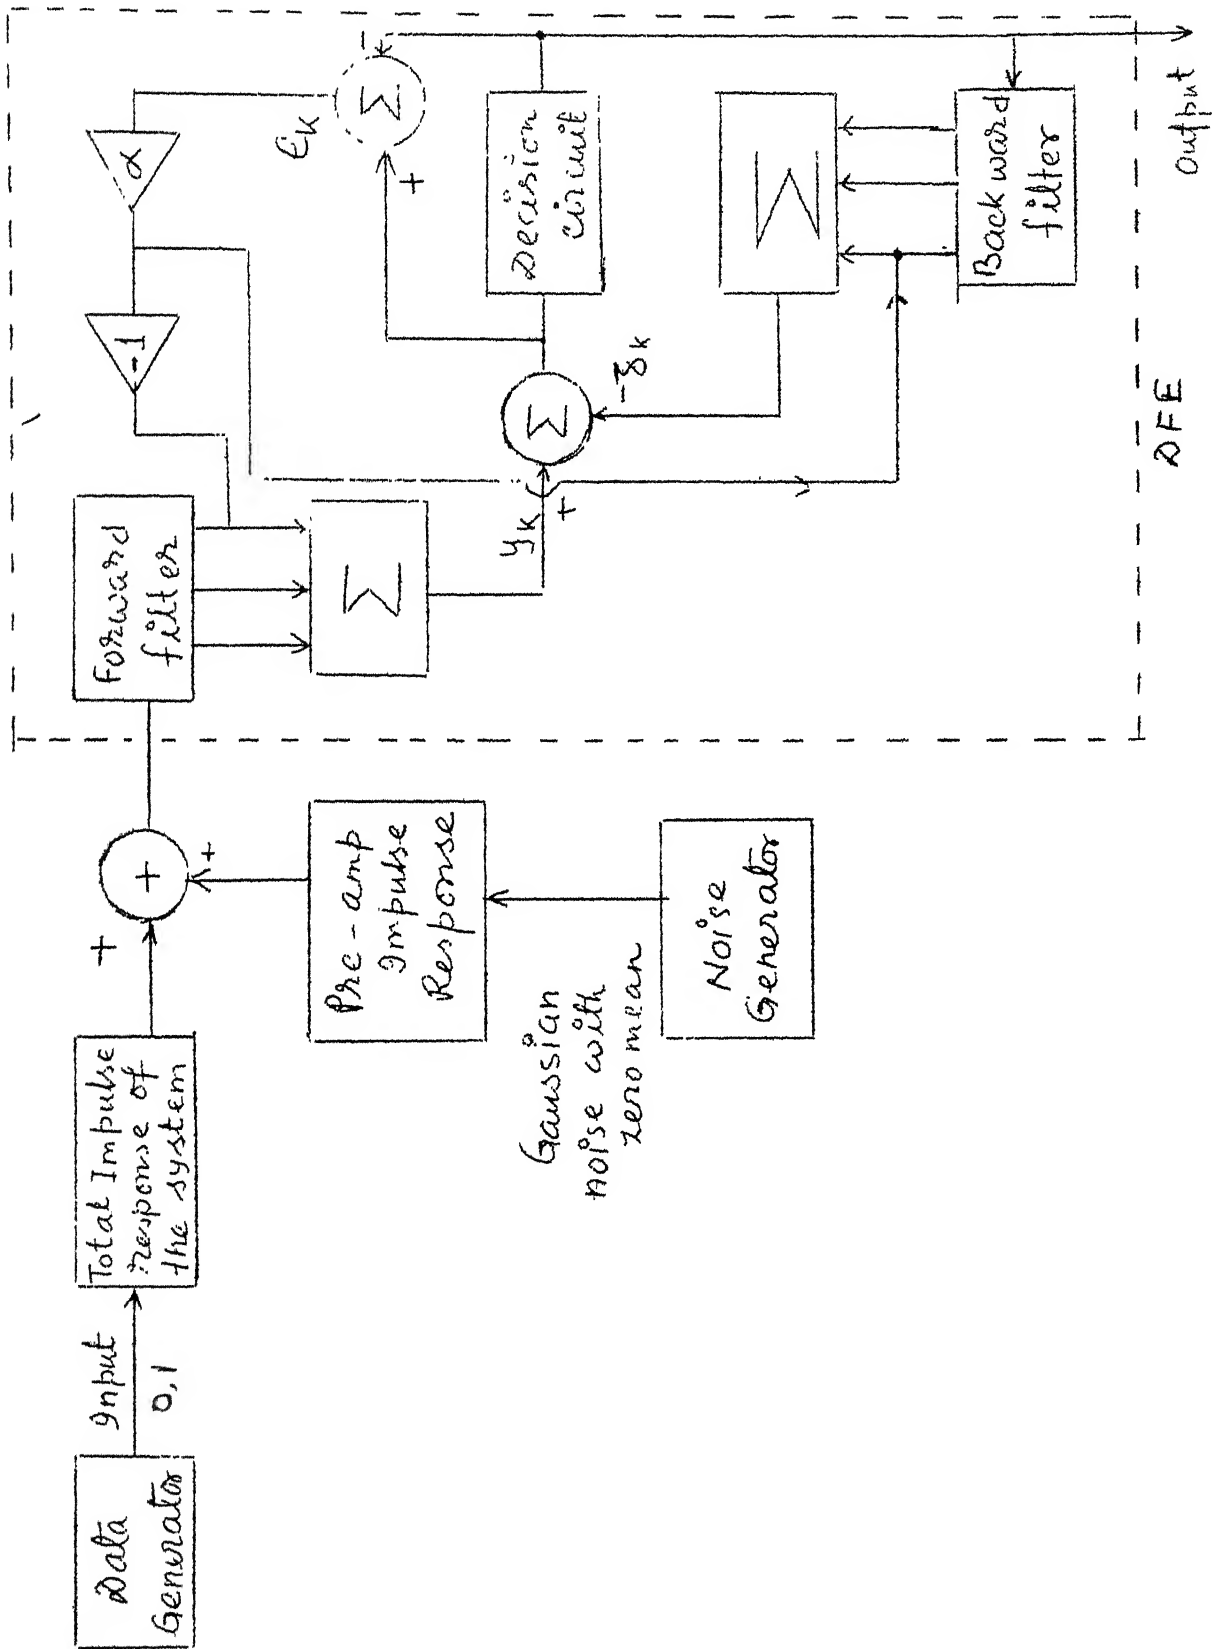


FIG 4.1 SIGNAL FLOW DIAGRAM

Table 4.1: Noise Variance and Standard Deviation
at Different SNR Values

SNR	Noise Variance	Standard Deviation
6	0.2512	0.5012
8	0.1585	0.3981
10	0.1	0.316227
12	0.0631	0.251188
14	0.0398	0.199526
16	0.02512	0.15849
24	0.00398	0.0631
32	0.00063	0.02512

Table 4.2

SNR = 10 No. of sample processed = 5000

Data Rate 150 M bit/sec.

Step size	Error	Freezed value at	Tap weight			
			Forward (1)	Backward (1)	(2)	(3)
0.10	7	495	0.9803	0.08568	-0.06226	0.07677
0.1	8	990	0.9741	0.004077	-0.06914	0.1162
0.1	9	1500	0.8070	-0.01352	0.1062	0.1972
0.05	4	495	0.9510	-0.04138	-0.01124	0.1553
0.05	5	65	0.9028	-0.003379	0.02807	0.18607
0.05	6	95	0.9244	0.05050	0.007390	0.1951
0.65	6	145	0.8819	0.03280	0.06871	0.1385
0.05	10	195	0.9123	-0.06046	0.06989	0.1145
0.05	8	295	0.8847	0.04733	0.03952	0.1671
0.1	9	195	0.9410	-0.06926	0.04480	0.1248

The optimum tap weights for the forward and the backward filter for the different data rates at various SNR values are given in Table 4.3.

Now the DFE is synthesized with the tap weights as calculated above. The average probability of error at data rates from 150 Mbps to 375 Mbps and for SNR values from 6 dB to 14 dB is determined. These are shown in Table 4.4 and plotted in Fig. 4.2. It is evident from the curve that for 2.155 km fibre a probability of error less than 10^{-7} can be achieved at higher SNR values. Table 4.4 also shows the total number of symbols processed. As discussed in Chapter 2 the error propagation effect is less as the SNR increases. In Fig. 4.3 we have reproduced the error occurrence during the simulation for SNR values of 6, 8, 10 and 12 dB. These are a sequence of '.' and '*'. '.' indicates a correct decision and '*' indicates an error. We notice that error bursts are more at higher data rates and lower values of SNR. If a group of errors is followed by correct decisions and the number of errors is equal to the number of backward filter taps then a particular error burst can be considered to be over. Any subsequent errors are due to noise and ISI arising from the future samples.

4.2.2 Source-LED, Fibre Length = 2.155 km:

In this case the source used is LED. Therefore the

Table 4.3 : Tap weights for source-Laser, link length = 2.155 km

Data Rate in M bit/s.	SNR (dB)	Forward Taps		Feedback taps				
		F_0	F_1	B_1	B_2	B_3	B_4	B_5
150	6 dB	0.8181		0.1151	0.04846		-0.04202	
150	8 "	0.8384		0.1722	0.07228		-0.006693	
150	10 "	0.9028		0.1807	0.02807		-0.003379	
150	12 "	0.9696		0.2088	-0.007343		0.014380	
150	14 "	0.9334		0.1600	0.08672		0.03629	
225	6 "	0.8248	0.08305	0.2959	0.1085	0.02918	0.02825	
225	8 "	0.8342	0.03947	0.2683	0.08387	0.01732	0.03678	
225	10 "	0.9280	-0.01288	0.3055	0.08678	0.04944	-0.01899	
225	12 "	0.9598	0.1066	0.3710	0.1028	0.07664	0.01900	
225	14 "	1.0220	0.6068	0.3472	0.1270	0.04489	0.08885	
300	6 "	0.8104	0.07912	0.2600	0.1496	0.06675	0.06519	-0.07089
300	8 "	0.8051	0.03392	0.3123	0.09820	0.03289	0.05806	0.01111
300	10 "	0.9410	0.01419	0.4793	0.1620	0.1378	0.06126	0.01673
300	12 "	0.9690	0.04090	0.4836	0.1620	0.1371	0.01272	0.02785
300	14 "	0.9646	0.05837	0.4735	0.1987	0.1071	0.2061	0.03698
375	12 "	0.9151	0.01268	0.5090	0.3192	0.1052	0.01514	0.05308
375	14 "	1.009	-0.08708	0.5688	0.1999	0.1407	0.1598	0.1165
375	24 "	1.022	-0.09712	0.5975	0.2707	0.1233	0.09689	0.04913

Table 4.4: System Performance (Source-Laser, link length = 2.155 km)

Data Rate M bit	SNR (dB)	No. of symbol processed	Error due to ISI only	Error without equalizer	Error	P(e)
150	6	50,000	0	1542	1202	2.40×10^{-2}
	8	50,000	0	551	313	6.26×10^{-3}
	10	10^5	0	269	86	8.6×10^{-4}
	12	2×10^5	0	72	3	1.5×10^{-5}
	14	8×10^6	0	168	0	Better than 1.25×10^{-7}
225	6	50,000	0	2812	1271	2.54×10^{-2}
	8	50,000	0	1645	390	7.8×10^{-3}
	10	10^5	0	1532	106	1.06×10^{-3}
	12	10^5	0	564	3	3×10^{-5}
	14	10^6	0	1542	1	1×10^{-6}
300	6	50,000	0	4836	1954	3.9×10^{-2}
	8	50,000	0	3627	519	1.038×10^{-2}
	10	10^5	0	5304	130	1.3×10^{-3}
	12	10^5	0	3780	13	1.3×10^{-4}
	14	10^6	0	17511	11	1.1×10^{-5}
375	12	10^5	5536	8792	21	2.1×10^{-4}
	14	10^5	5460	7977	2	2×10^{-5}

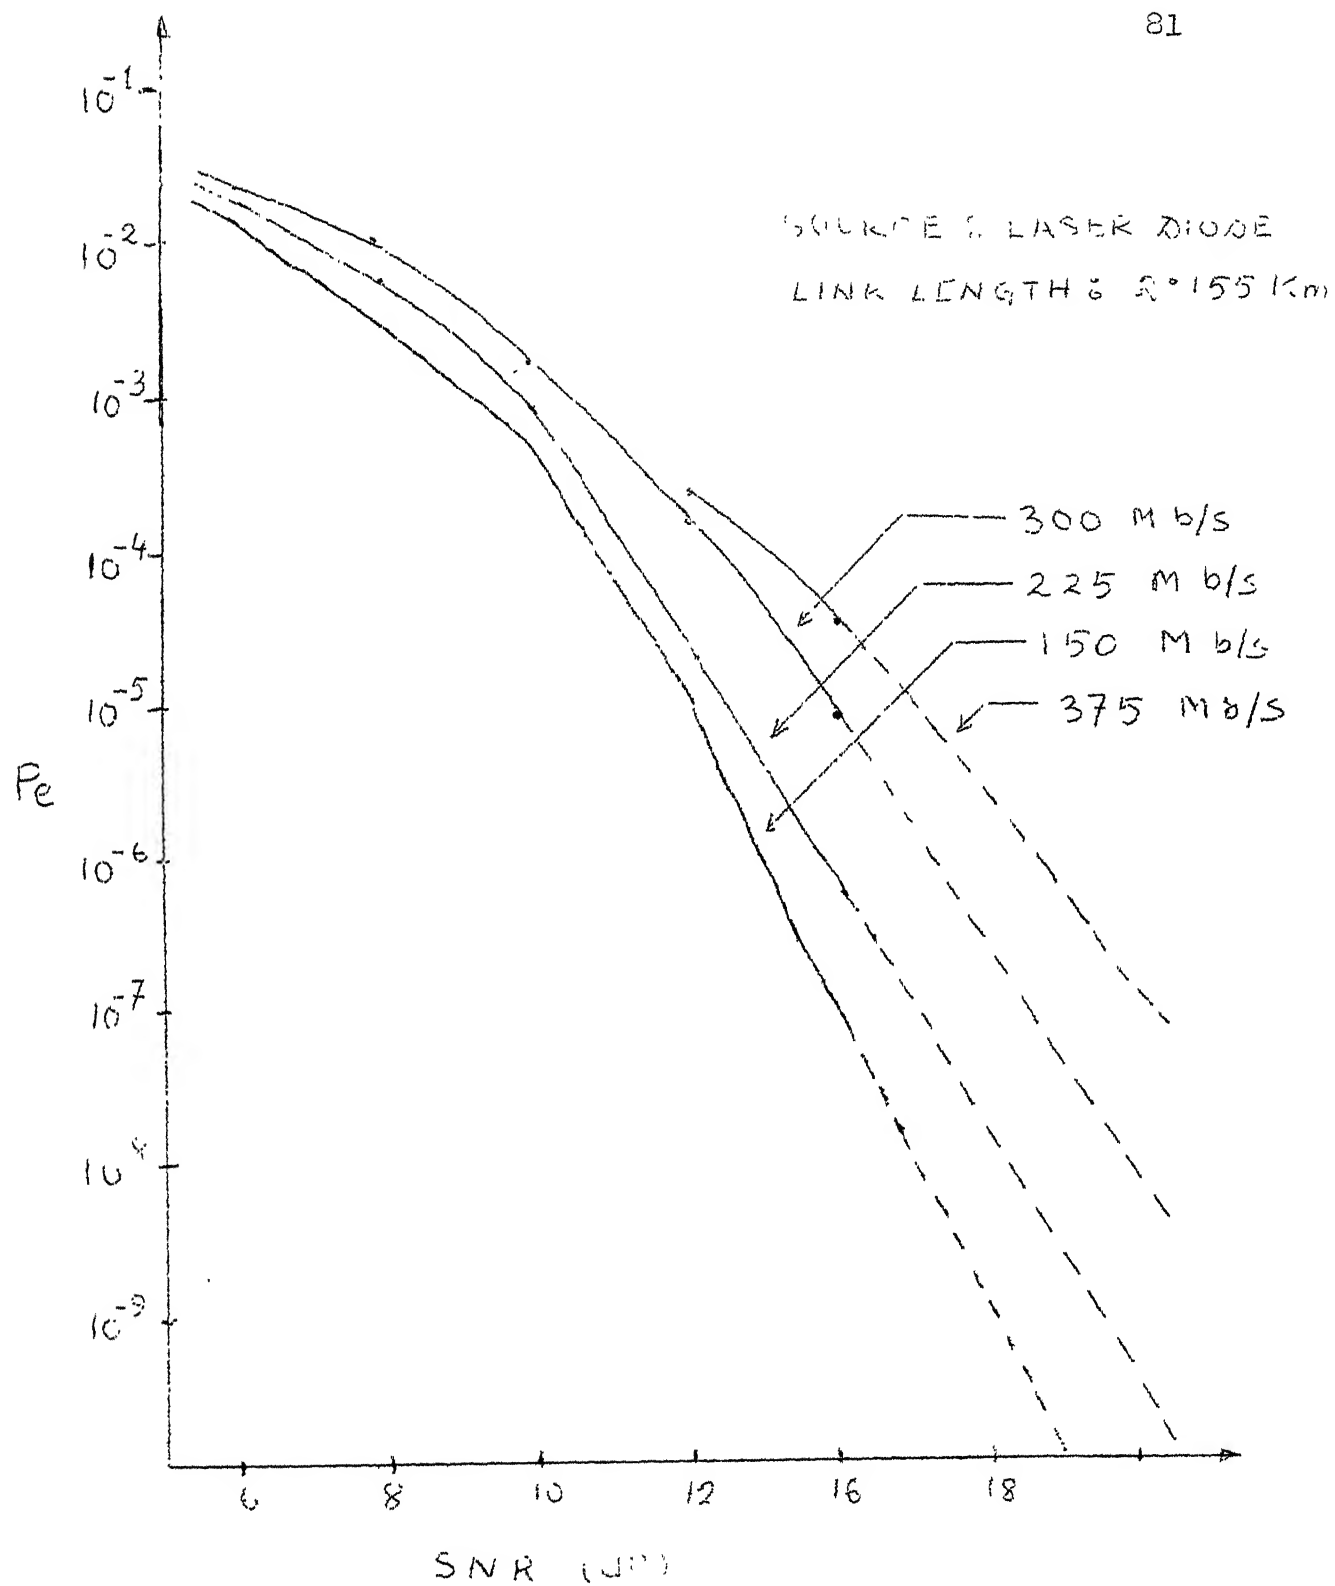


FIG 4.2 DFE PERFORMANCE

[illegible][illegible]

FORWARD TAPS

0-91015+00	0-91015+00
0-91045+00	0-91045+00
0-91085+00	0-91085+00
0-91095+00	0-91095+00

BACKWARD TAPS

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85															

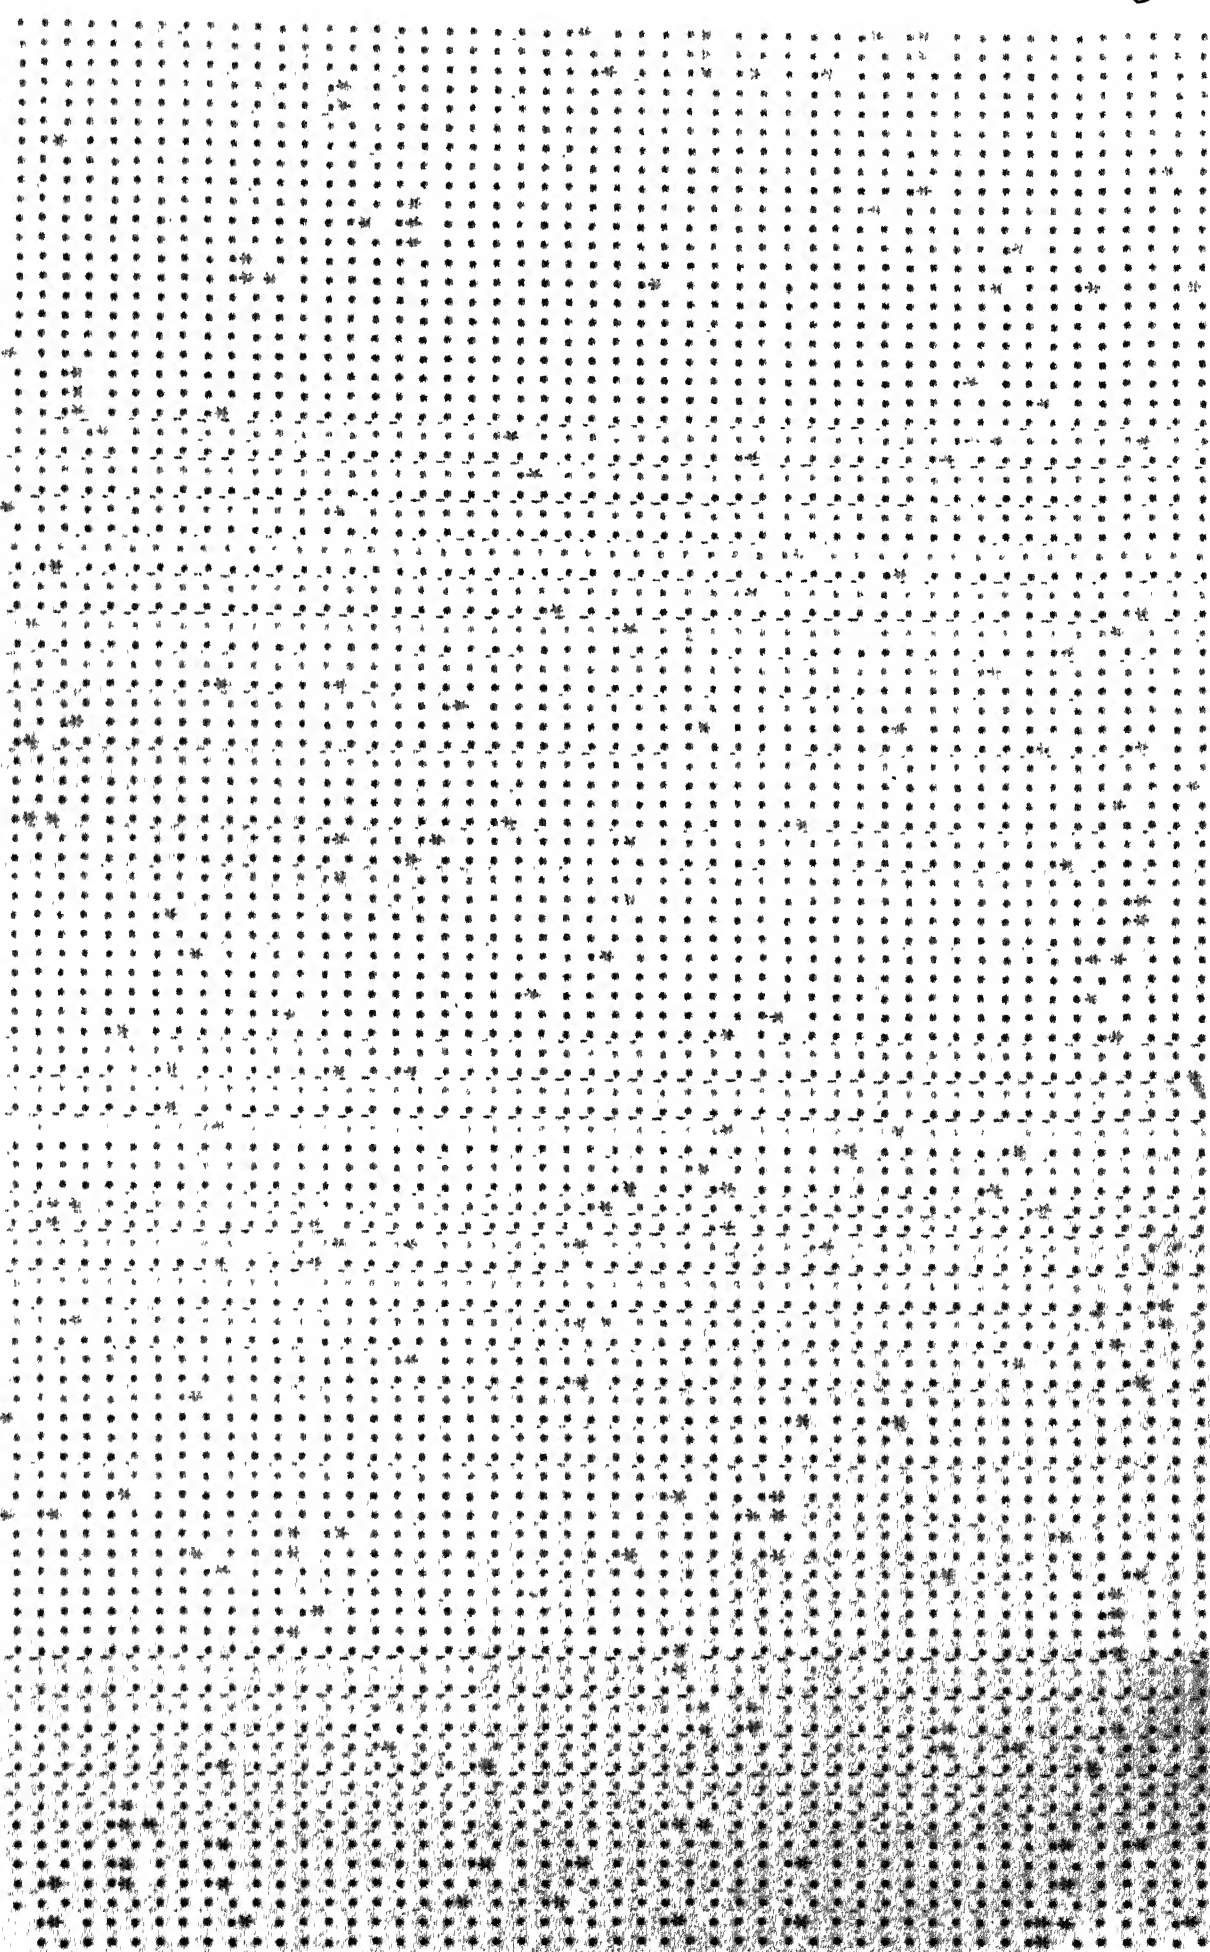


Fig. 4.3

FORWARD TAPS

[illegible]

[illegible]

material dispersion due to the source is much more and it spreads the impulse response further in time domain. The resultant impulse response of the system is shown in Fig. 3.8. In this case also first we determine the optimum tap weights for SNR values of 10,12 and 14 dB. The optimum tap weights are given in Table 4.5. Now the probability of error is found by using the tap gain values as determined above. Probability of error for SNR values 10,12 and 14 dB are plotted in Fig. 4.4. It is clear from the figure that the probability of error less than 10^{-7} can be achieved at higher SNRs and lower data rates. Table 4.6 shows the total number of symbols processed, the number of symbols received in error and the probability of error.

In Fig. 4.5 we have reproduced the system output photograph with errors. These are again a sequence of '.' and '*'. We observe that the error propagation effect due to backward filter is very less.

For the system under discussion we have also carried out simulation at reduced data rates for SNR values of 10,12 and 14 dB, when the equalizer has not been used. In this case, the output of the pre-amplifier is fed directly into the decision circuit. It is seen that at very low data rates we can dispense with the equalizer as the symbol interval is very large and there is much less ISI. Table 4.7 shows the

Table 4.5: Tap weights for Source-LED, link length = 2.155 km

Data Rate in M bits/s	SNR (dB)	Forward Taps			Feedback Taps		
		F ₀	F ₁	F ₂	B ₁	B ₂	B ₃
100	10	0.9596			0.2139	0.02134	-0.03313
	12	0.9386			0.1692	0.02214	0.009726
	14	0.9515			0.1993	0.04272	-0.05206
125	10	0.9512	-0.1035	-0.009650	0.2595	0.09460	0.02047
	12	0.9953	-0.09263	-0.02762	0.3505	0.09309	0.01794
	14	0.9476	-0.1306	0.03417	0.3089	0.07797	-0.03819
150	10	0.9291	-0.1766	0.003023	0.3534	0.1334	0.04911
	12	1.009	-0.2240	0.04405	0.4087	0.1393	0.03268
	14	1.059	-0.3001	0.01427	0.4083	0.09660	0.08317
175	10	0.9696	-0.2336	0.04284	0.3560	0.1337	0.05107
	12	1.009	-0.2651	0.003807	0.4180	0.1952	0.09220
	14	0.9511	-0.2186	-0.01559	0.3616	0.1316	0.07032

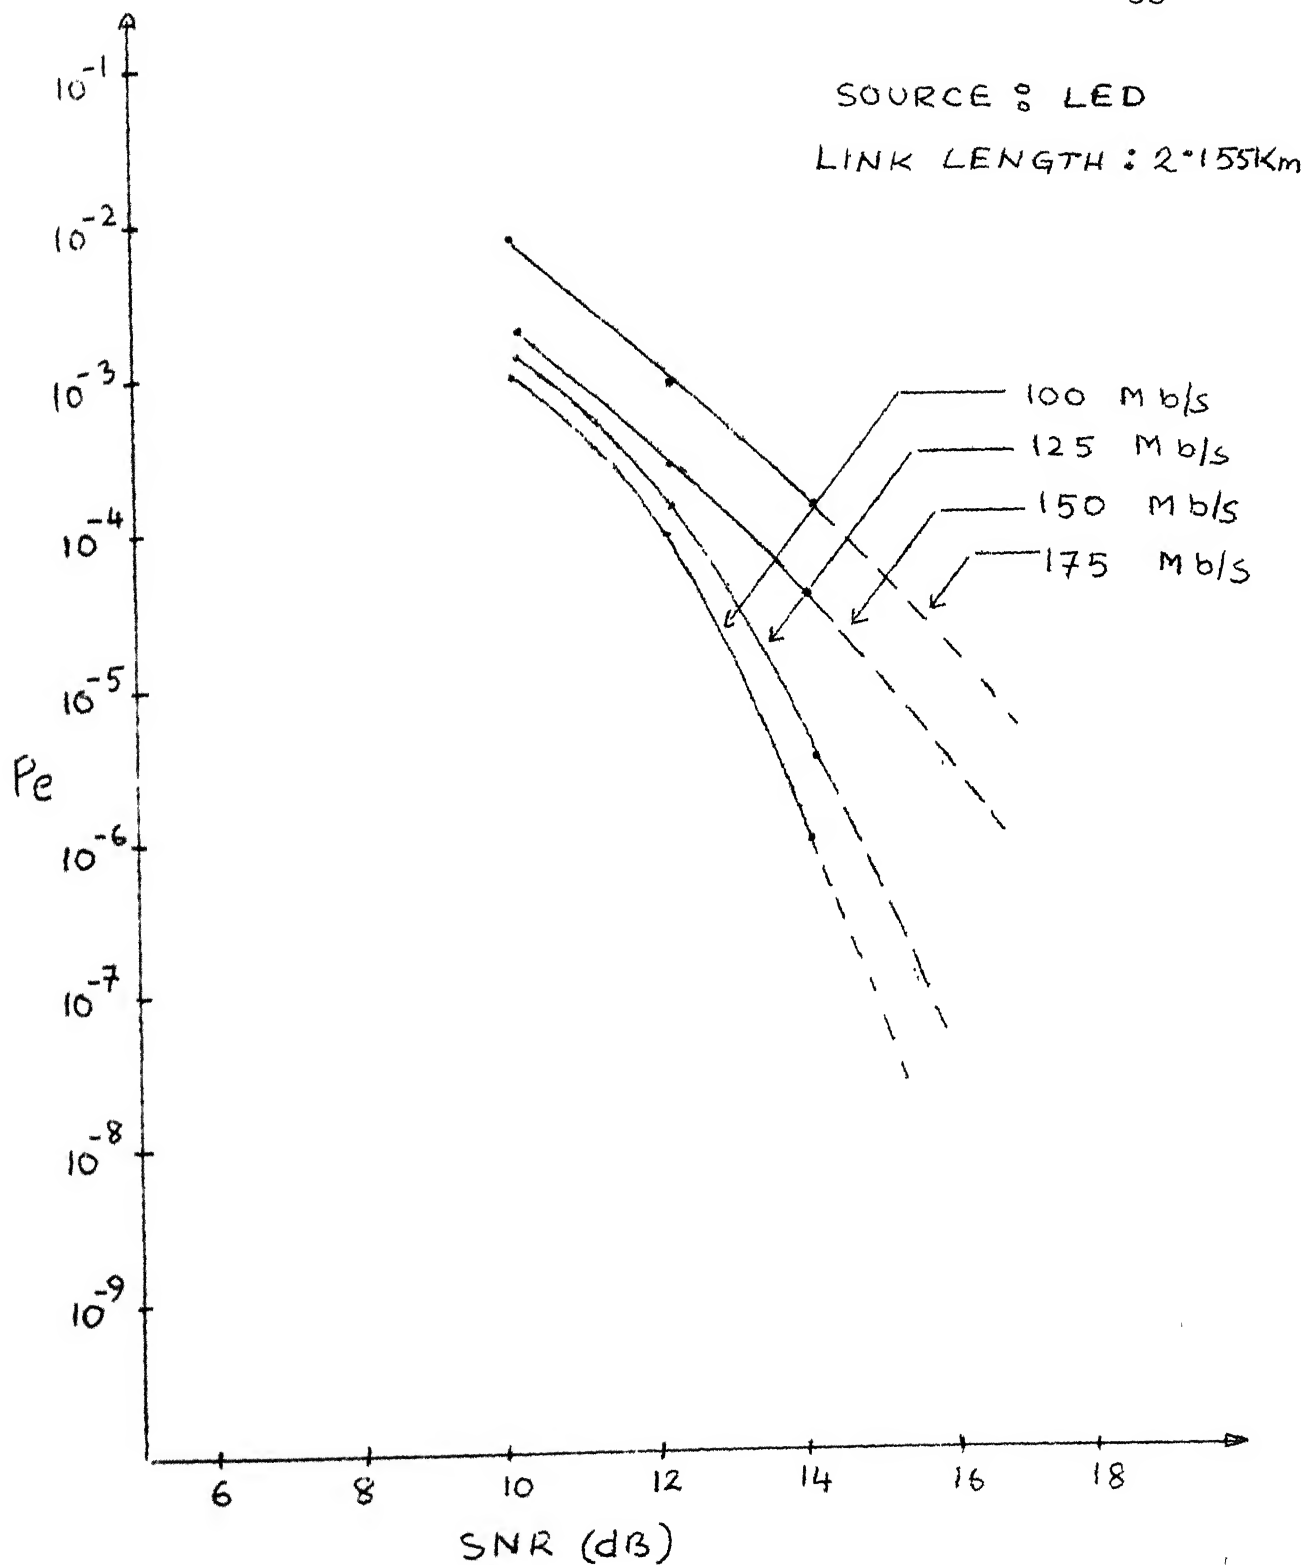


FIG 4.4 DFE PERFORMANCE

Table 4.6: System Performance (Source-LED, link length = 2.155 km)

Data Rate in M bits/s	SNR (dB)	No. of symbol processed	Error due to ISI only	Error without equaliser	Error	P(e)
100	10	70,000	0	410	91	1.3×10^{-3}
	12	10^5	0	122	11	1.1×10^{-4}
	14	2×10^6	0	266	4	2×10^{-6}
125	10	50,000	0	814	96	1.92×10^{-3}
	12	1×10^5	0	332	18	1.80×10^{-4}
	14	2×10^6	0	5845	9	4.5×10^{-6}
150	10	50,000	0	2127	180	3.6×10^{-3}
	12	10^5	0	2962	42	4.2×10^{-4}
	14	10^6	0	20551	25	2.5×10^{-5}
175	10	50,000	4651	4093	458	9.16×10^{-3}
	12	50,000	4687	3807	44	8.8×10^{-4}
	14	10^5	9337	7082	23	2.3×10^{-4}

FORWARD TAPS

[illegible]

0.9695474

[illegible]

STREET

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

1. The first part of the document is a list of references. The references are listed in two columns. The first column contains references 1 through 10, and the second column contains references 11 through 20. The references are as follows:

Reference	Author	Title	Year
1	Smith, J. D.	The Role of the Teacher in the Classroom	1985
2	Johnson, M. K.	Classroom Management Strategies	1990
3	Williams, L. R.	Assessment and Evaluation in the Classroom	1995
4	Brown, S. P.	Instructional Strategies for the 21st Century	2000
5	Miller, T. A.	Classroom Organization and Management	2005
6	Davis, R. L.	Classroom Assessment Techniques	2010
7	Wilson, J. B.	Classroom Management: A Practical Guide	2015
8	Thompson, K. L.	Classroom Management: A Practical Guide	2018
9	Anderson, P. M.	Classroom Management: A Practical Guide	2020
10	Robinson, S. L.	Classroom Management: A Practical Guide	2022
11	Green, J. H.	Classroom Management: A Practical Guide	2023
12	White, R. T.	Classroom Management: A Practical Guide	2024
13	Black, D. W.	Classroom Management: A Practical Guide	2025
14	Gray, C. J.	Classroom Management: A Practical Guide	2026
15	King, L. A.	Classroom Management: A Practical Guide	2027
16	Wright, J. M.	Classroom Management: A Practical Guide	2028
17	Scott, K. R.	Classroom Management: A Practical Guide	2029
18	Young, M. N.	Classroom Management: A Practical Guide	2030
19	Allen, S. D.	Classroom Management: A Practical Guide	2031
20	Chen, Y. F.	Classroom Management: A Practical Guide	2032

2. The second part of the document is a list of references. The references are listed in two columns. The first column contains references 21 through 30, and the second column contains references 31 through 40. The references are as follows:

Reference	Author	Title	Year
21	Lee, H. J.	Classroom Management: A Practical Guide	2033
22	Kim, S. K.	Classroom Management: A Practical Guide	2034
23	Kim, S. K.	Classroom Management: A Practical Guide	2035
24	Kim, S. K.	Classroom Management: A Practical Guide	2036
25	Kim, S. K.	Classroom Management: A Practical Guide	2037
26	Kim, S. K.	Classroom Management: A Practical Guide	2038
27	Kim, S. K.	Classroom Management: A Practical Guide	2039
28	Kim, S. K.	Classroom Management: A Practical Guide	2040
29	Kim, S. K.	Classroom Management: A Practical Guide	2041
30	Kim, S. K.	Classroom Management: A Practical Guide	2042
31	Kim, S. K.	Classroom Management: A Practical Guide	2043
32	Kim, S. K.	Classroom Management: A Practical Guide	2044
33	Kim, S. K.	Classroom Management: A Practical Guide	2045
34	Kim, S. K.	Classroom Management: A Practical Guide	2046
35	Kim, S. K.	Classroom Management: A Practical Guide	2047
36	Kim, S. K.	Classroom Management: A Practical Guide	2048
37	Kim, S. K.	Classroom Management: A Practical Guide	2049
38	Kim, S. K.	Classroom Management: A Practical Guide	2050
39	Kim, S. K.	Classroom Management: A Practical Guide	2051
40	Kim, S. K.	Classroom Management: A Practical Guide	2052

3. The third part of the document is a list of references. The references are listed in two columns. The first column contains references 41 through 50, and the second column contains references 51 through 60. The references are as follows:

Reference	Author	Title	Year
41	Kim, S. K.	Classroom Management: A Practical Guide	2053
42	Kim, S. K.	Classroom Management: A Practical Guide	2054
43	Kim, S. K.	Classroom Management: A Practical Guide	2055
44	Kim, S. K.	Classroom Management: A Practical Guide	2056
45	Kim, S. K.	Classroom Management: A Practical Guide	2057
46	Kim, S. K.	Classroom Management: A Practical Guide	2058
47	Kim, S. K.	Classroom Management: A Practical Guide	2059
48	Kim, S. K.	Classroom Management: A Practical Guide	2060
49	Kim, S. K.	Classroom Management: A Practical Guide	2061
50	Kim, S. K.	Classroom Management: A Practical Guide	2062
51	Kim, S. K.	Classroom Management: A Practical Guide	2063
52	Kim, S. K.	Classroom Management: A Practical Guide	2064
53	Kim, S. K.	Classroom Management: A Practical Guide	2065
54	Kim, S. K.	Classroom Management: A Practical Guide	2066
55	Kim, S. K.	Classroom Management: A Practical Guide	2067
56	Kim, S. K.	Classroom Management: A Practical Guide	2068
57	Kim, S. K.	Classroom Management: A Practical Guide	2069
58	Kim, S. K.	Classroom Management: A Practical Guide	2070
59	Kim, S. K.	Classroom Management: A Practical Guide	2071
60	Kim, S. K.	Classroom Management: A Practical Guide	2072

4. The fourth part of the document is a list of references. The references are listed in two columns. The first column contains references 61 through 70, and the second column contains references 71 through 80. The references are as follows:

Reference	Author	Title	Year
61	Kim, S. K.	Classroom Management: A Practical Guide	2073
62	Kim, S. K.	Classroom Management: A Practical Guide	2074
63	Kim, S. K.	Classroom Management: A Practical Guide	2075
64	Kim, S. K.	Classroom Management: A Practical Guide	2076
65	Kim, S. K.	Classroom Management: A Practical Guide	2077
66	Kim, S. K.	Classroom Management: A Practical Guide	2078
67	Kim, S. K.	Classroom Management: A Practical Guide	2079
68	Kim, S. K.	Classroom Management: A Practical Guide	2080
69	Kim, S. K.	Classroom Management: A Practical Guide	2081
70	Kim, S. K.	Classroom Management: A Practical Guide	2082
71	Kim, S. K.	Classroom Management: A Practical Guide	2083
72	Kim, S. K.	Classroom Management: A Practical Guide	2084
73	Kim, S. K.	Classroom Management: A Practical Guide	2085
74	Kim, S. K.	Classroom Management: A Practical Guide	2086
75	Kim, S. K.	Classroom Management: A Practical Guide	2087
76	Kim, S. K.	Classroom Management: A Practical Guide	2088
77	Kim, S. K.	Classroom Management: A Practical Guide	2089
78	Kim, S. K.	Classroom Management: A Practical Guide	2090
79	Kim, S. K.	Classroom Management: A Practical Guide	2091
80	Kim, S. K.	Classroom Management: A Practical Guide	2092

5. The fifth part of the document is a list of references. The references are listed in two columns. The first column contains references 81 through 90, and the second column contains references 91 through 100. The references are as follows:

Reference	Author	Title	Year
81	Kim, S. K.	Classroom Management: A Practical Guide	2093
82	Kim, S. K.	Classroom Management: A Practical Guide	2094
83	Kim, S. K.	Classroom Management: A Practical Guide	2095
84	Kim, S. K.	Classroom Management: A Practical Guide	2096
85	Kim, S. K.	Classroom Management: A Practical Guide	2097
86	Kim, S. K.	Classroom Management: A Practical Guide	20

[illegible][illegible]

[The page contains extremely faint, illegible text, likely bleed-through from the reverse side.]

[illegible]

.....

姓名	性别	年龄	籍贯	职业	文化程度	健康状况	婚姻状况	子女情况	其他
王德胜	男	45	山东	工人	高中	良好	已婚	2子1女	
李秀英	女	38	河北	教师	大学	良好	已婚	1子1女	
张国强	男	52	河南	农民	初中	一般	已婚	3子2女	
刘小红	女	28	江苏	护士	大专	良好	未婚	无子女	
陈为民	男	60	浙江	退休	小学	较差	已婚	4子3女	
赵大伟	男	35	四川	工程师	硕士	良好	已婚	1子1女	
孙丽娟	女	42	湖南	医生	本科	良好	已婚	2子1女	
周建民	男	55	湖北	干部	高中	一般	已婚	3子2女	
吴小芳	女	30	广东	会计	大专	良好	未婚	无子女	
郑为民	男	48	安徽	工人	初中	一般	已婚	2子1女	
冯大刚	男	58	江西	农民	小学	较差	已婚	4子3女	
马秀珍	女	33	山西	教师	大学	良好	已婚	1子1女	
徐国强	男	40	陕西	工人	高中	良好	已婚	2子1女	
林小红	女	25	福建	护士	大专	良好	未婚	无子女	
周为民	男	50	广西	干部	初中	一般	已婚	3子2女	
吴大伟	男	38	云南	工程师	硕士	良好	已婚	1子1女	
孙丽娟	女	45	贵州	医生	本科	良好	已婚	2子1女	
周建民	男	53	海南	干部	高中	一般	已婚	3子2女	
吴小芳	女	31	重庆	会计	大专	良好	未婚	无子女	
郑为民	男	49	四川	工人	初中	一般	已婚	2子1女	
冯大刚	男	59	湖南	农民	小学	较差	已婚	4子3女	
马秀珍	女	34	湖北	教师	大学	良好	已婚	1子1女	
徐国强	男	41	广东	工人	高中	良好	已婚	2子1女	
林小红	女	26	浙江	护士	大专	良好	未婚	无子女	
周为民	男	51	江苏	干部	初中	一般	已婚	3子2女	
吴大伟	男	39	安徽	工程师	硕士	良好	已婚	1子1女	
孙丽娟	女	46	江西	医生	本科	良好	已婚	2子1女	
周建民	男	54	河南	干部	高中	一般	已婚	3子2女	
吴小芳	女	32	河北	会计	大专	良好	未婚	无子女	
郑为民	男	50	山东	工人	初中	一般	已婚	2子1女	
冯大刚	男	60	山西	农民	小学	较差	已婚	4子3女	
马秀珍	女	35	陕西	教师	大学	良好	已婚	1子1女	
徐国强	男	42	福建	工人	高中	良好	已婚	2子1女	
林小红	女	27	湖南	护士	大专	良好	未婚	无子女	
周为民	男	52	湖北	干部	初中	一般	已婚	3子2女	
吴大伟	男	40	广东	工程师	硕士	良好	已婚	1子1女	
孙丽娟	女	47	广西	医生	本科	良好	已婚	2子1女	
周建民	男	55	海南	干部	高中	一般	已婚	3子2女	
吴小芳	女	33	重庆	会计	大专	良好	未婚	无子女	
郑为民	男	51	四川	工人	初中	一般	已婚	2子1女	
冯大刚	男	61	湖南	农民	小学	较差	已婚	4子3女	
马秀珍	女	36	湖北	教师	大学	良好	已婚	1子1女	
徐国强	男	43	广东	工人	高中	良好	已婚	2子1女	
林小红	女	28	浙江	护士	大专	良好	未婚	无子女	
周为民	男	53	江苏	干部	初中	一般	已婚	3子2女	
吴大伟	男	41	安徽	工程师	硕士	良好	已婚	1子1女	
孙丽娟	女	48	江西	医生	本科	良好	已婚	2子1女	
周建民	男	56	河南	干部	高中	一般	已婚	3子2女	
吴小芳	女	34	河北	会计	大专	良好	未婚	无子女	
郑为民	男	52	山东	工人	初中	一般	已婚	2子1女	

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

100

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

[illegible]

100

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	5
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

[illegible][illegible]

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

[illegible]

THE UNIVERSITY OF CHICAGO

100

[illegible]

.....

100

[illegible]

THE UNIVERSITY OF CHICAGO

100

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 104

[illegible][illegible]

100

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	5
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

.....

100

姓名	性别	年龄	民族	籍贯	职业	文化程度	政治面貌	婚姻状况	健康状况	兴趣爱好	特长	其他
张三	男	25	汉族	湖南长沙	教师	本科	中共党员	已婚	良好	阅读、运动	钢琴	
李四	女	30	汉族	湖北武汉	医生	硕士	民主党派	未婚	良好	旅游、摄影	舞蹈	
王五	男	35	汉族	广东广州	工程师	本科	中共党员	已婚	良好	钓鱼、登山	书法	
赵六	女	28	汉族	四川成都	记者	本科	民主党派	已婚	良好	写作、烹饪	声乐	
孙七	男	40	汉族	浙江杭州	公务员	本科	中共党员	已婚	良好	品茶、园艺	围棋	
周八	女	32	汉族	北京天津	律师	硕士	民主党派	已婚	良好	瑜伽、阅读	小提琴	
吴九	男	22	汉族	福建厦门	程序员	本科	中共党员	未婚	良好	编程、电竞	篮球	
郑十	女	27	汉族	山东青岛	设计师	本科	民主党派	已婚	良好	绘画、手工	古筝	
冯十一	男	38	汉族	广西桂林	会计师	本科	中共党员	已婚	良好	理财、徒步	象棋	
陈十二	女	33	汉族	河南郑州	销售经理	本科	民主党派	已婚	良好	交际、购物	羽毛球	
林十三	男	29	汉族	江西九江	科研人员	硕士	中共党员	未婚	良好	实验、写作	钢琴	
周十四	女	31	汉族	江苏苏州	翻译	本科	民主党派	已婚	良好	外语、阅读	舞蹈	
吴十五	男	36	汉族	安徽合肥	项目经理	本科	中共党员	已婚	良好	管理、运动	足球	
郑十六	女	26	汉族	湖南长沙	市场专员	本科	民主党派	未婚	良好	策划、沟通	声乐	
孙十七	男	42	汉族	湖北武汉	财务总监	本科	中共党员	已婚	良好	理财、阅读	围棋	
周十八	女	34	汉族	广东广州	人力资源	本科	民主党派	已婚	良好	招聘、培训	瑜伽	
吴十九	男	23	汉族	四川成都	产品经理	本科	中共党员	未婚	良好	产品、创新	篮球	
郑二十	女	29	汉族	浙江杭州	运营专员	本科	民主党派	已婚	良好	运营、推广	古筝	
冯二十一	男	37	汉族	北京天津	数据分析师	硕士	中共党员	已婚	良好	分析、编程	象棋	
陈二十二	女	32	汉族	福建厦门	品牌经理	本科	民主党派	已婚	良好	品牌、营销	舞蹈	
林二十三	男	27	汉族	山东青岛	销售主管	本科	中共党员	未婚	良好	销售、沟通	足球	
周二十四	女	30	汉族	河南郑州	行政助理	本科	民主党派	已婚	良好	行政、协调	羽毛球	
吴二十五	男	35	汉族	江西九江	IT支持	本科	中共党员	已婚	良好	技术支持、维修	钢琴	
郑二十六	女	28	汉族	江苏苏州	客服专员	本科	民主党派	未婚	良好	客服、沟通	声乐	
孙二十七	男	41	汉族	安徽合肥	系统管理员	本科	中共党员	已婚	良好	系统维护、网络	围棋	
周二十八	女	33	汉族	湖南长沙	培训师	本科	民主党派	已婚	良好	培训、演讲	舞蹈	
吴二十九	男	24	汉族	湖北武汉	产品经理	本科	中共党员	未婚	良好	产品规划、设计	篮球	
郑三十	女	29	汉族	广东广州	运营专员	本科	民主党派	已婚	良好	运营策略、推广	古筝	
冯三十一	男	36	汉族	四川成都	数据分析师	硕士	中共党员	已婚	良好	数据分析、建模	象棋	
陈三十二	女	31	汉族	浙江杭州	品牌经理	本科	民主党派	已婚	良好	品牌推广、营销	舞蹈	
林三十三	男	26	汉族	北京天津	销售主管	本科	中共党员	未婚	良好	销售技巧、沟通	足球	
周三十四	女	30	汉族	福建厦门	行政助理	本科	民主党派	已婚	良好	行政管理、协调	羽毛球	
吴三十五	男	34	汉族	山东青岛	IT支持	本科	中共党员	已婚	良好	IT故障排除、网络	钢琴	
郑三十六	女	27	汉族	河南郑州	客服专员	本科	民主党派	未婚	良好	客户接待、沟通	声乐	
孙三十七	男	40	汉族	江西九江	系统管理员	本科	中共党员	已婚	良好	系统维护、网络	围棋	
周三十八	女	32	汉族	江苏苏州	培训师	本科	民主党派	已婚	良好	培训开发、演讲	舞蹈	
吴三十九	男	23	汉族	安徽合肥	产品经理	本科	中共党员	未婚	良好	产品规划、设计	篮球	
郑四十	女	28	汉族	湖南长沙	运营专员	本科	民主党派	已婚	良好	运营策略、推广	古筝	
冯四十一	男	37	汉族	湖北武汉	数据分析师	硕士	中共党员	已婚	良好	数据分析、建模	象棋	

[illegible]

.....

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

100

.....

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

(LED)

FORWARD TAPS

BACKWARD TAPS

0-40175+01 0-25075+01 0-09075+01 0-13075+01 0-87075+01
0-40095+01 0-25015+01 0-09015+01 0-13015+01 0-87015+01
NO OF ERRORS 1000 1000 1000 1000 1000
NUMBER OF 00000 00000 00000 00000 00000
00000 00000 00000 00000 00000

0-09075+01 0-13075+01 0-87075+01

0-09015+01 0-13015+01 0-87015+01

Table 4.7: System Performance without DFE (Source-LED,
link length = 2.155 km)

Data Rate in M Bits/s	SNR (dB)	No. of Symbol processed	Error	P(e)
75	10	10,000	32	3.2×10^{-3}
	12	50,000	9	1.8×10^{-4}
	14	5,10,005	5	9.8×10^{-6}
62.5	10	10,000	9	9×10^{-4}
	12	10^5	10	1×10^{-4}
	14	4×10^6	5	1.25×10^{-6}
50	10	20,000	15	7.5×10^{-4}
	12	111,762	5	4.47×10^{-5}
	14	5×10^6	1	2×10^{-7}

data rate, number of symbols processed and the probability of error without the equalizer.

4.2.3 Source-Laser, Fibre Length = 4.310 km:

In the system under discussion we assumed two equal fibre sections of length 2.155 km. each have been ideally connected to one another. For simulation the impulse response of the system as shown in Fig.3.11 is considered. Again for this system first we determined the optimum tap weights of the forward and backward filters by the adaptive method for SNR values of 10,12 and 14 dB. The optimum tap weights are given in Table 4.8.

The average probability of error at different data rates for 4.310 km fibre length and for various SNR values is determined. The probability of error for various SNRs is plotted in Fig. 4.6. It is observed that with the increase of the link length the probability of error for the same data rate and SNR is higher. Table 4.9 shows the number of symbols processed, the number of errors in simulation and the probability of error.

For this system also we have carried out simulation at much reduced data rates when the equalizer is not used. The results are shown in Table 4.10. The main interference is due to the noise. Therefore, the system works better without any equalizer at higher values of SNR.

Table 4.8: Tap weights for Source-Laser, link length = 4.310 km

Data Rate in M bits/s (dB)	SNR	Forward Taps		Feedback Tap				
		F_0	F_1	B_1	B_2	B_3	B_4	B_5
150	10	0.8969		0.3153	0.1062	0.01517	-0.01405	
	12	0.9357		0.3317	0.1250	0.03097	0.01873	
	14	0.9791		0.4004	.09755	0.01817	-0.007171	
200	10	0.9046	0.02048	0.4635	.2255	0.05147	0.02256	
	12	0.9352	0.002023	0.4585	0.2652	0.06820	0.006570	
	14	0.9796	-0.002269	0.4935	0.3559	0.08362	-0.05300	
200	10	0.9310	-0.01488	0.5687	0.3520	0.2413	0.06583	0.02405
	12	0.9672	-0.04332	0.5730	0.2841	0.2283	0.04145	-0.02053
	14	0.9973	-0.04714	0.5528	0.2913	0.1870	-0.02107	-0.01404

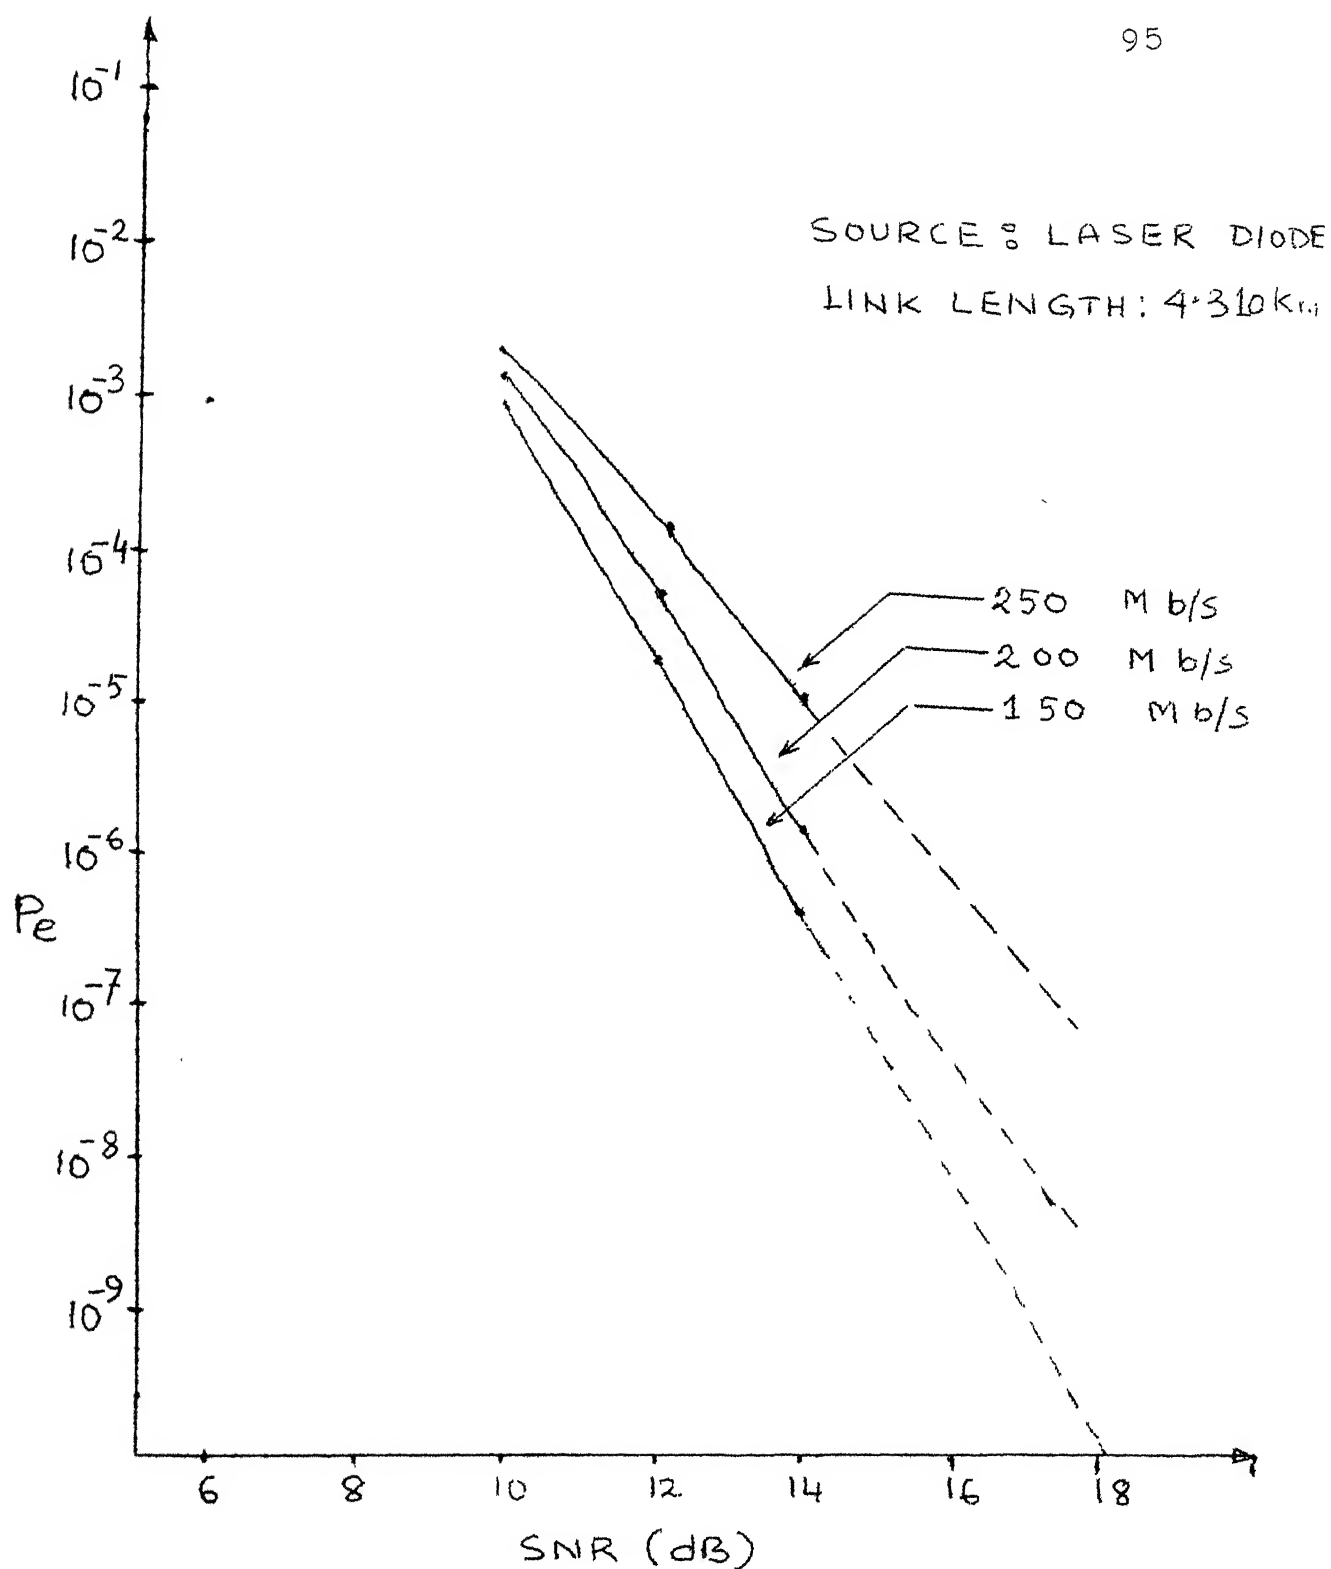


FIG 4.6 DFE PERFORMANCE

Table 4.9: System Performance (Source-Laser, link length = 4.310 km)

Data Rate in M Bits/s	SNR (dB)	No. of symbol processed	Error due to ISI only	Error without equalizer	Error	P(e)
150	10	10^5	0	1704	109	1.09×10^{-3}
	12	2×10^5	0	1294	5	2.5×10^{-5}
	14	5×10^6	0	9355	3	6×10^{-7}
200	10	10^5	0	6428	121	1.21×10^{-3}
	12	10^5	0	4934	6	6×10^{-5}
	14	2×10^6	0	76110	3	1.5×10^{-6}
250	10	50,000	4690	5640	152	3.04×10^{-3}
	12	50,000	4585	5240	7	1.4×10^{-4}
	14	10^6	93772	102037	11	1.1×10^{-5}

Table 4.10: System Performance Without DFE
(Source-Laser, link length = 4.310 km)

Data Rate in M bits/s	SNR (dB)	No. of Symbol Processed	Err	P(e)
100	10	10,000	69	6.9×10^{-3}
	12	10,000	14	1.4×10^{-3}
	14	10^5	9	9×10^{-5}
87	10	20 000	43	2.15×10^{-3}
	12	20 000	9	4.5×10^{-4}
	14	10^5	8	8×10^{-5}
75		20,000	31	1.55×10^{-3}
	12	10^5	16	1.6×10^{-4}
	14	10^6	2	2×10^{-6}
60	10	20,000	30	1.5×10^{-3}
	12	46,300	5	1.08×10^{-4}
	14	10^6	0	Better than 10^{-6}

CHAPTER 5

CONCLUSION

This thesis has been directed to evaluate the performance of some fibre optic digital communication systems. We have shown an optical fibre system with its essential components. The choice of source and photodetector depends upon the length of the fibre, attenuation of the fibre and desired probability of error for a given data rate. We have seen that to use the same fibre length at higher data rates, one has to use a laser diode as the source, as the power required to combat the ISI penalty is not sufficient when we use a LED. Similarly the increase in fibre length limits the data rate which can be transmitted over the link for a desired $P(e)$.

We have considered systems with different sources and fibre lengths as follows.

- a) Source-Laser diode, link length = 2.155 km
- b) Source-LED, link length = 2.155 km
- c) Source-Laser diode, link length = 4.310 km

We have noticed that the fibre channel spreads the optical signal in time domain. This dispersion and additive noise of the system cause ISI. The effect of ISI can be reduced with an equalizer.

In this thesis we have designed a DFE based on the Mosen's Gradient technique. DFE uses both the received signal and reconstructed data to form its decision. The tap weight values for the DFE have been determined by Mosen's adoptive linear filtering method.

To determine the tap weight values and to evaluate the performance of the system, we carried out simulation on the digital computer DEC-1090 system. Optimum tap values are obtained when the number of taps of the forward filter is equal to the number of future ISI sample plus one and taps are spaced at the symbol interval.

The initial aim was to find the maximum data rate and SNR value for a system which gives a $P(e)$ of 10^{-8} . To get the $P(e)$ of 10^{-8} , one has to generate and process on an average 10^9 noise and data symbols. From simulation we have noticed that to generate and process 10^6 symbols on the computer CPU and execution time are approximately 6.8 and 35 minutes, respectively. Therefore, a maximum of 8×10^6 symbols could be generated and processed in the simulation.

The fundamental assumption in the design of the DFE is that the decisions are error free, but, in every simulation certain amount of error, i.e. 'Error Bursts'

have occurred. Any wrong decision affects the decision in the DFE till it propagates in the feedback filter. Error bursts are more at higher data rates and lower SNR values.

From the results we have noticed that for a data rate of 150 M bits/sec., the system with the LED source gives a probability of error of 2.5×10^{-5} for a SNR of 14 dB. Whereas, with the laser diode a probability of error of 1.25×10^{-7} is obtained for the same SNR value. Also from the extension of the performance curve (Fig. 4.2) for 150 M bits/sec. it is observed that a $P(e)$ of 10^{-9} for the fibre length of 2.155 km can be achieved at an approximate SNR of 16 dB. Whereas for the fibre length of 4.310 km (Fig. 4.6), it can be achieved at approximately 18 dB.

For systems (b) and (c) performance of the links have also been evaluated without an equalizer. For source-LED and a link length of 2.155 km, it is observed that to achieve the same $P(e)$ at a SNR of 14 dB, the maximum data rate which can be transmitted without an equalizer is approximately 60% of the data rate obtained with the equalizer (Ref. Table 4.6 and 4.7).

For the source-laser and link length of 4.31 km, to achieve the same $P(e)$ at a SNR of 14 dB, the maximum

data rate which can be transmitted without an equalizer is less than 50% of the data rate obtained with the equalizer (Ref. Table 4.9 and 4.10). From this we observe that with the equalizer, we can transmit atleast double the data rates than without the equalizer to achieve the same $P(e)$.

Capt. R. Wahi [15] designed a DFE based on Austin's sub-optimal method. He has used a data rate of 10 M-bits/sec. and a fibre whose impulse response at 10% amplitude has a full width of 275 ns. For 14 dB SNR he has obtained a $P(e)$ of 3×10^{-5} . In our study we have used a resultant impulse response, whose width at 10% amplitude is 10.5 ns. We have used data rates from 150 to 375 M-bits

In our case for a SNR of 14 dB, the $P(e)$ at 300 and 375 M-bits/sec. is 1.5×10^{-5} and 2×10^{-5} , respectively. For 150 M-bit/sec. and SNR of 14 dB, we get $P(e)$ better than 1.25×10^{-7} . In Capt. R. Wahi's study the ratio of full width at 10% to symbol interval is 2.75 and in our study it is 3.18 and 3.9 for data rates 300 and 375 M bits/sec, respectively. From the above this system seems to be better.

One could study the performance of DFE after actual measurements of the overall impulse response of the system and then simulating on the computer.

Another issue for further study is the simulation of the entire system including line coder, bit synchronizer and decoder etc., on the digital computer. The performance of the system can also be studied after hardware implementation of the DFE and then its performance can be compared with the simulation results.

Finally system can also be investigated by considering the affect of shot noise on the system.


REFERENCES


1. Robert V. Bruce, 'Alexander Graham Bell and the Conquest of Solitude', London: Gollancz, 1973.
2. T.H. Maiman, Nature, 187, 493 (1960).
3. K.C. Kao and G.A. Hockham, Proc. IEE, 113, 1151 (1966).
4. S.D. Personick, Bell Syst. Tech. J. 52 (1973), 1175-1194.
5. S.D. Personick, W.M. Hubbard and W.S. Holden, Appl. Optics, 13(1974) 226-268.
6. R.W. Lucky, Bell Syst. Tech. J. 44(1965), 547-588.
7. J.G. Proakis and J.H. Miller, IEEE Trans. Information Theory, IT-15 (1969), 484-497.
8. M.E. Austin, 'Decision-Feedback Equalization for Digital Communication over Dispersive Channels', MIT Research Laboratory of Electronics Technical Report 461 and Lincon Laboratory Technical Report 437, August 11, 1967.
9. G.J. Foschini, R.O. Gitlin and J. Salz, 'Optimum Direct Detection for Digital Fibre Optic Communication Systems', Bell Syst. Tech. J. vol. 54, No. 8, October (1975), 1389-1430.
10. Gobind Sharma, 'A Quantised Electron Arrival Times Estimator Based Digital Fibre Optic Receiver', M.Tech. thesis, IIT Kanpur, 1981.
11. R. Dogliotti, A. Guardincerri, A. Luvison, Optical and Quantum Electronics, 8(1976) 343-353.
12. R. Dogliotti and A. Luvison, 'Signal Processing in Digital Fiber Communication', Second European Conference on Optical Fibre Communication, Paris, 27-30 Sept, 1976.
13. R.E. Lawrence and H. Kaufman, IEEE Trans. Commun. Technol. (Special Issue on Signal Processing for Digital Communication), vol. COM-19 (1971) 1137-1141.

14. D.G. Messerschmitt, 'Minimum MSE Equalization of Digital Fibre Optic Systems', IEEE Trans. Commun., vol. COM-26, No. 7, July, 1978.
15. Capt. R. Wahi, 'D.F.E. with Predistortion Transmitter Filter for Optical Fibre Channel', M.Tech. thesis, IIT Kanpur, 1981.
16. G. Tamburelli, 'Decision Feedback and Feedforward Receiver', CSELT, Rapporti Techic, vol. 4, September, 1970.
17. C.S. Weaver, 'Adaptive Communication Filtering', IEEE Trans. Inform. Theory, vol. IT-8, September (1962), 169-178.
18. A. Gersho, 'Adaptive equalization of highly dispersive channels for data transmission, I', Bell. Syst. Tech. J., vol. 48, January (1969) 55-70.
19. P. Monsen, 'Linear Equalization for Digital Transmission over Noisy Dispersive Channels', Ph.D. dissertation, Columbia University, New York : McGraw-Hill, June 1970.
20. P. Monsen, IEEE Trans. Commun. August (1974), 1064-1075.
21. ITT Technical Note R-1, Optical Fibre Communication.
22. A. Kowalski, 'The Resultant Dispersion of Fiber Guide Link', IEEE Journal of Quantum Electronics, vol. QE-18, No. 4, April (1982) 453-454.
23. D.A. George, 'Adaptive DFE', IEEE Trans. Commun. No. 3, June (1971) 281-293.
24. P. Monsen, 'Theoretical and Measured Performance of a DFE Modem on a Fading Multi-path Channel', IEEE Trans. Commun. vol. COM-25, No. 10, October (1977).
25. J.R. Ragazzine and G.F. Franklin, Sampled Data Control System. New York: McGraw-Hill, 1958. Ch. 10.

FLOW CHART

APPENDIX

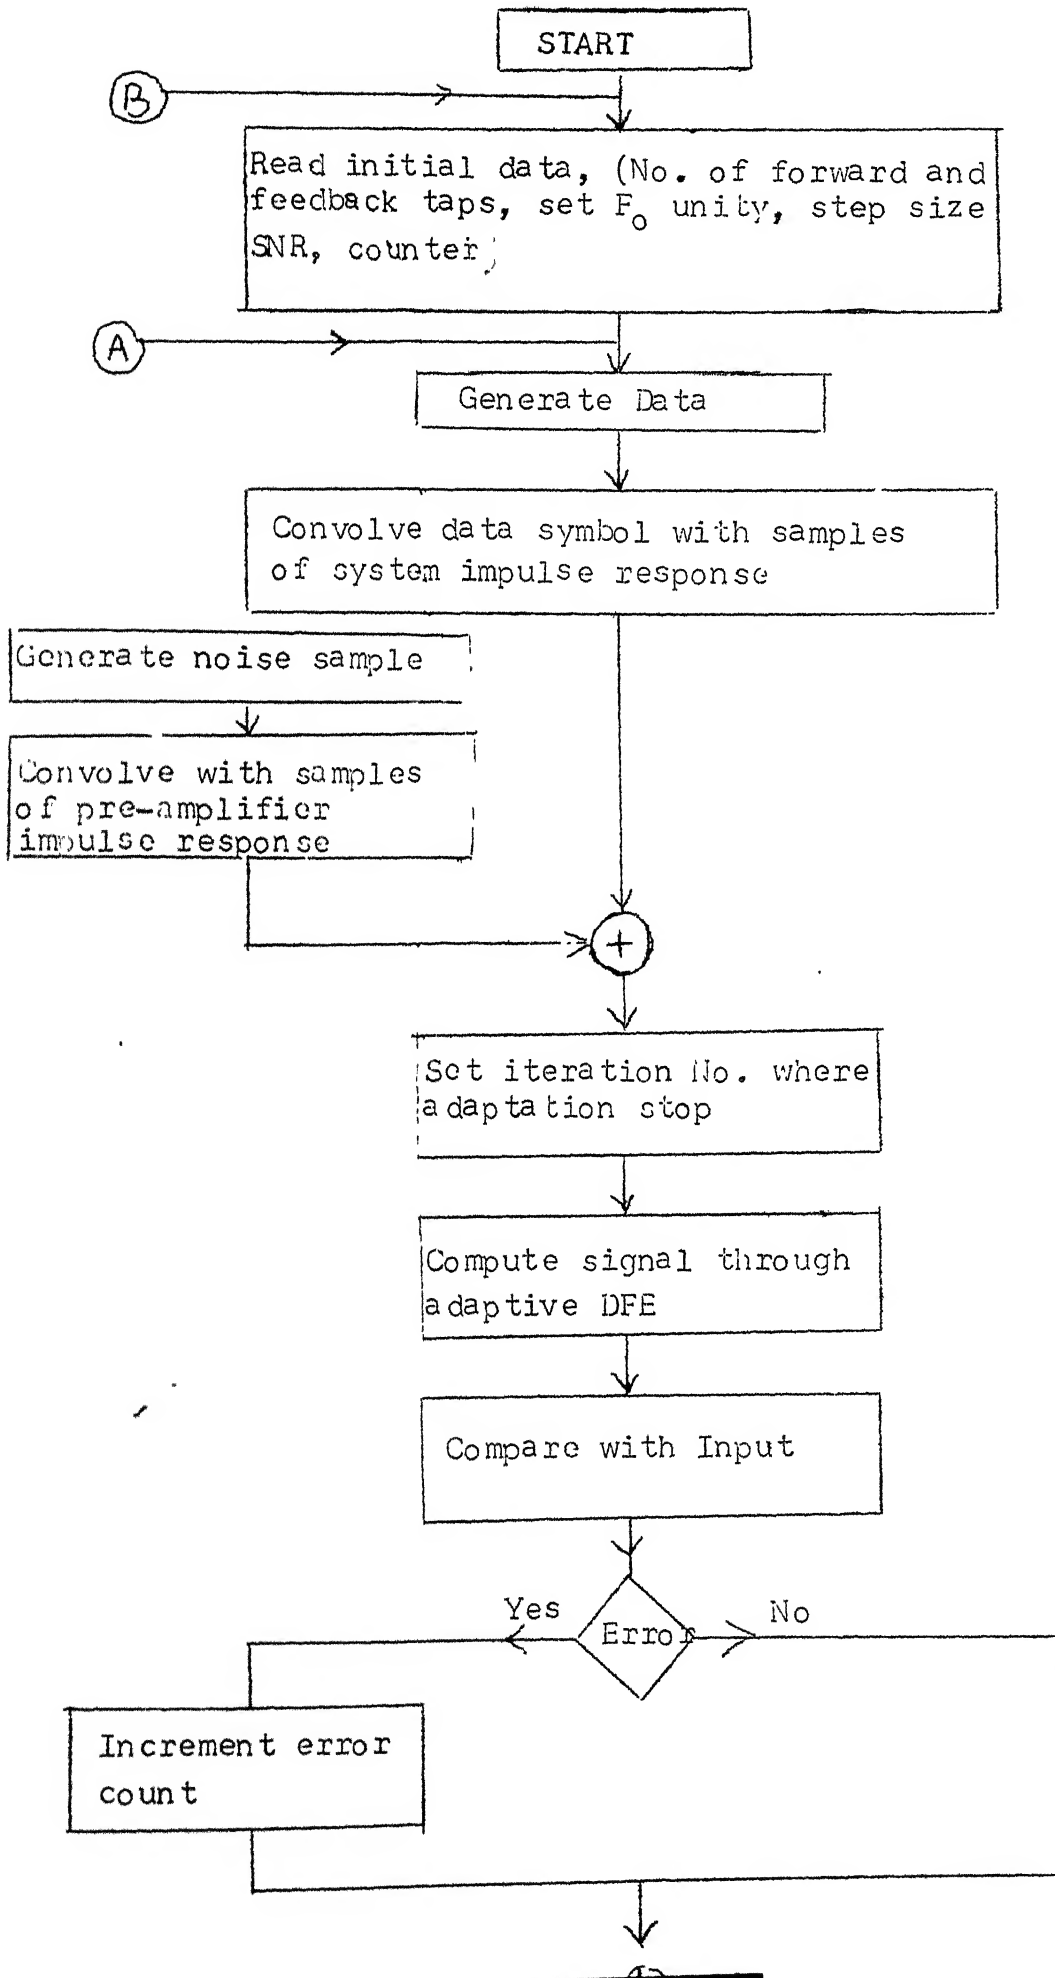

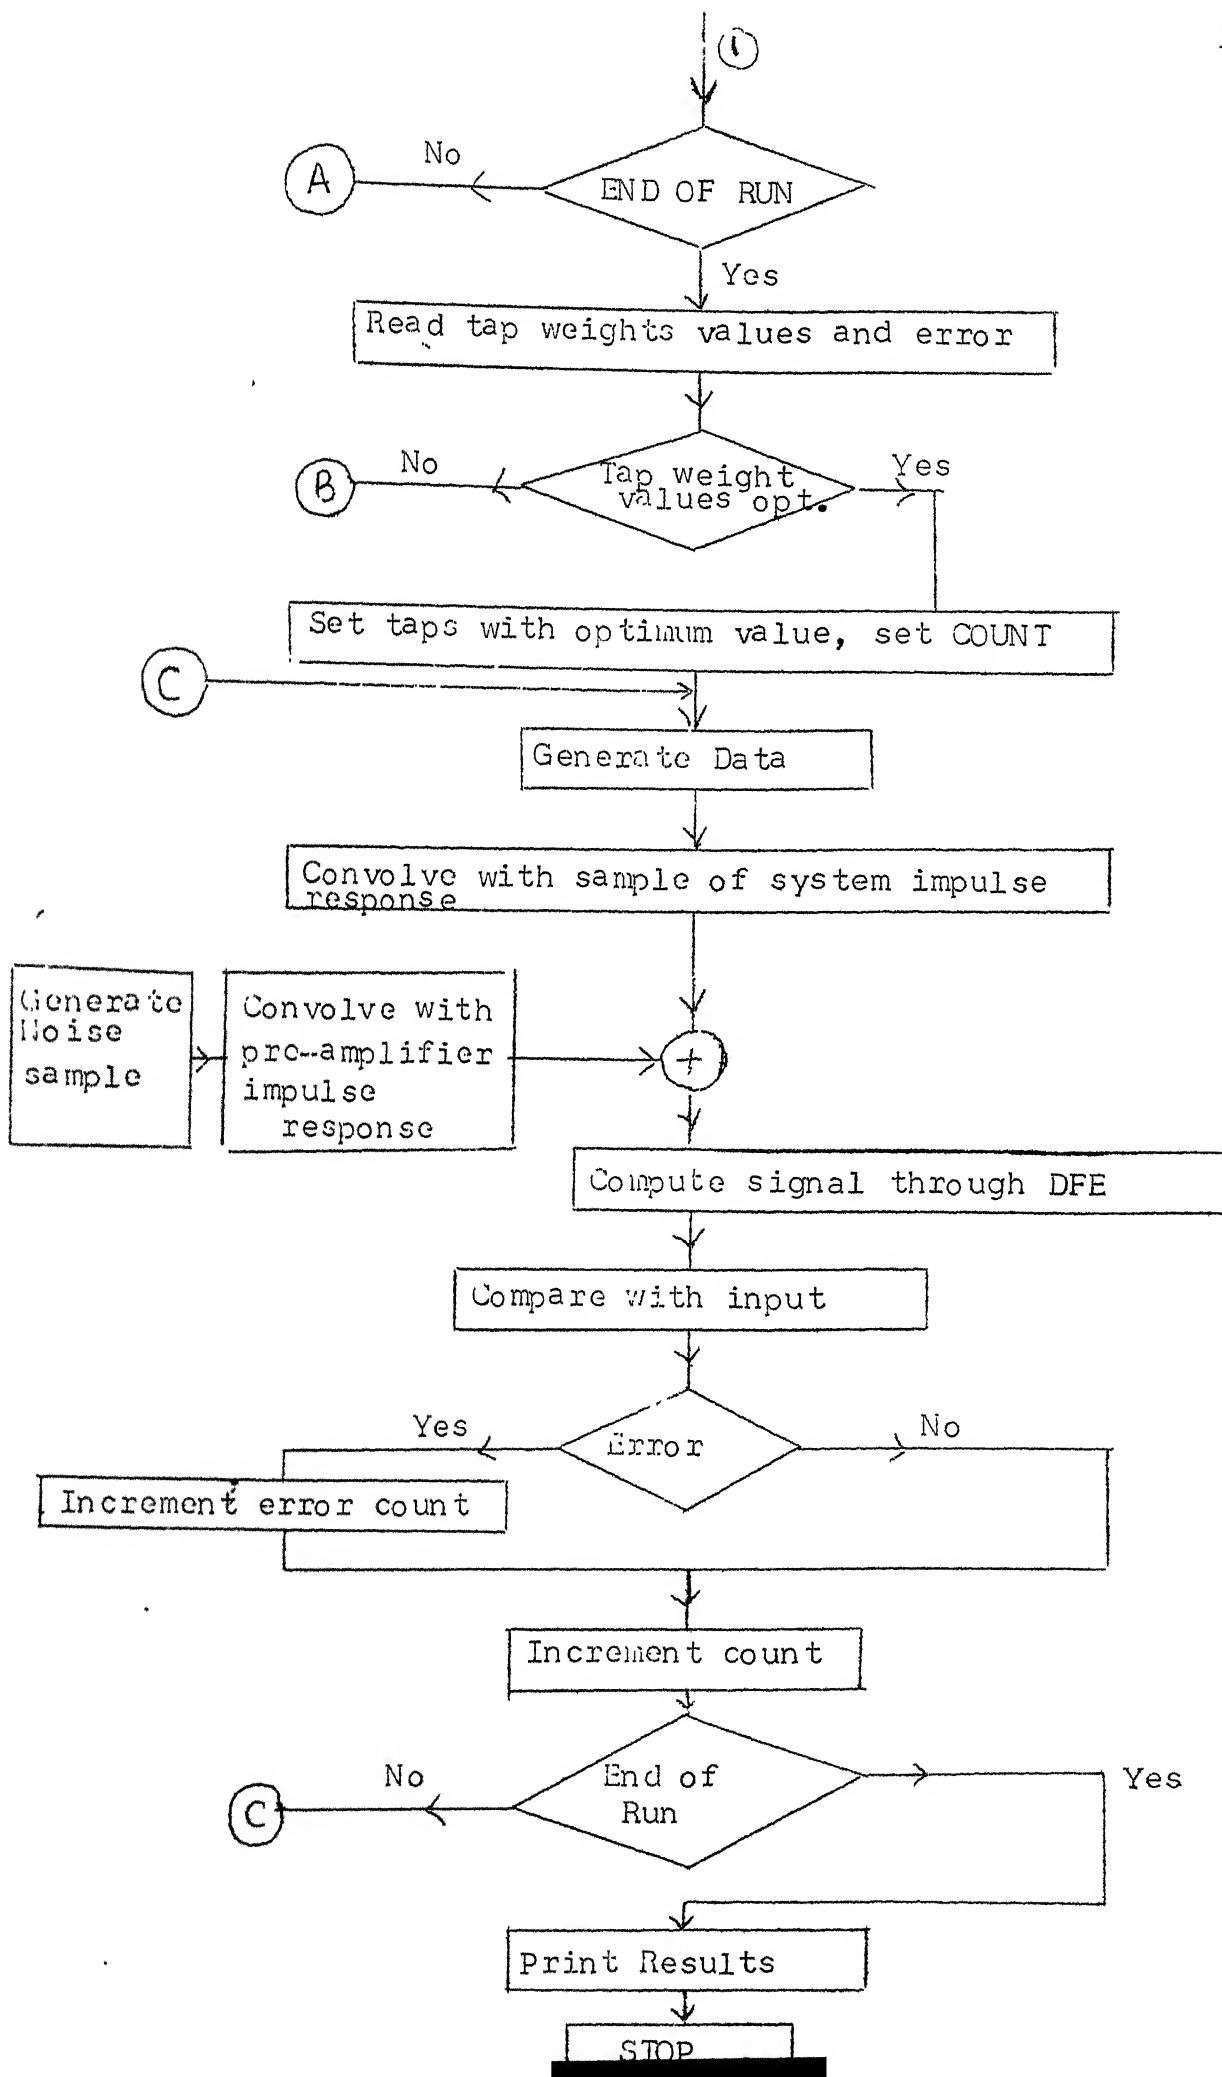

PROGRAM LISTING

```

C      THIS PROGRAM CALCULATE FORWARDIS & BACKWARD TAP GAINS
C      AND EVALUATE THE PERFORMANCE OF DECISION FEEDBACK EQUALISER
C      DIMENSION P(15),F(15),S(15),B(15),P(5),GN(5),H(15),X(15)
C      DIMENSION A(100),FF(50),BB(50),D(100000)
C      REAL A,B,K
C      OPEN(UNIT=15,DEVICE='DSK',FILE='TAP2.DAT')
C      OPEN(UNIT=16,DEVICE='DSK',FILE='TAP22.DAT')
C      SNR=10      FREQ=150 MHZ
C      WRITE(15,92)
92     FREQ=150, 'SNR=10      FREQ=150 MHZ      ALFA(STEP SIZE)=0.05 ',/20X
1     '-----'///)
C      ALFA=STEP SIZE
C      ALFA=0.05
C      ALFAH=0.0
C      SIGMA=STANDARD DEVIATION(FOR SNR)
C      SIGMA=0.199526
C      P(T)=PRE-AMPLIFIER IMPULSE RESPONSE SAMPLE VALUES
C      P(1)=1.000;P(2)=0.0339
C      GN(1)=0.0 ;GN(2)=0.0 ;GN(3)=0.0 ;GN(4)=0.0;GN(5)=0.0
C      H(T)=SYSTEM IMPULSE RESPONSE SAMPLE VALUES
C      H(1)=0.0973;H(2)=1.0;H(3)=0.6007;H(4)=0.3123;H(5)=0.2102
C      H(6)=0.0627;H(7)=0.0190
C      X(1)=0.0;X(2)=0.0;X(3)=0.0;X(4)=0.0;X(5)=0.0;X(6)=0.0;X(7)=0.0
C      X(8)=0.0;X(9)=0.0;X(10)=0.0;X(11)=0.0;X(12)=0.0;X(13)=0.0
C      T(T)=LOCATION OF SIGNAL IN FORWARD FILTER
C      T(1)=0.0;T(2)=0.0000; T(3)=0.0000;T(4)=0.0000;T(5)=0.0000
C      T(6)=0.0;T(7)=0.0; T(8)=0.0; T(9)=0.0; T(10)=0.0
C      F(T)=FORWARD FILTER TAP VALUE
C      F(1)=1.0000;F(2)= .0000 0;F(3)=0.0000000; F(4)=0.0;F(5)=0.0
C      F(6)=0.0;F(7)=0.0;F(8)=0.0;F(9)=0.0;F(10)=0.0
C      S(T)=LOCATION OF BACKWARD FILTER FOR RECONSTRUCTED DATA
C      S(1)=0.0;S(2)=0.0 ;S(3)=0.0 ;S(4)=0.0;S(5)=0.0;S(6)=0.0;S(7)=0.0
C      S(8)=0.0;S(9)=0.0;S(10)=0.0;S(11)=0.0
C      B(T)=FEEDBACK FILTER TAP VALUE
C      B(1)=0.000000; B(2)=0.0000 ;B(3)=0.000000;B(4)=0.0000;B(5)=0.0000
C      B(6)=0.0 ;B(7)=0.0000

```



```

C
C
C      JP=NUMBER OF SAMPLES OF PRE-AMPLIFIER IMPULSE RESPONSE
C      JH=NUMBER OF SAMPLES OF SYSTEM IMPULSE RESPONSE
C      JF=NUMBER OF FORWARD FILTER TAPS
C      JB=NUMBER OF FEEDBACK FILTER TAPS
C      JFS=NUMBER OF FUTURE ISI SAMPLE
C      JFTBM=NUMBER OF FUTURE ISI SAMPLE BEFORE MAIN TAP OF FWD FILTER
C      ITOT=JFS+JFTBM
C      JRAJGE=ITERATION NO FROM WHERE VALUES OF TAP GAIN STORED
C      JRAJGE=ITERATION NO UPTO WHICH VALUES OF TAP GAIN STORED
C      JFIX= ITERATION NO AT WHICH ADAPTATION STOP
C      JP=2; JI=1; JF=2; JB=5; JFS=1; JFTBM=1; ITOT=2
C      JRAJGE= 1493; JRBAGE= 1497; JFIX= 1495
C      N=10000
C      NP=20
C      K=0
C      JI=1
C      NO1S=0.0
C      NO2=0.0
C      CALL G05CCF
C      DO 10 I=1,N
C      K=K+1
C      AK=G05CAF(A)
C      IF(AK.GE.0.5) GO TO 31
C      AK=-1.0
C      GO TO 32
31  AK=1.0
32  DO 23 J=1,ITOT
C      A(J)=INPUT DATA TO THE SYSTEM
C      A(J)=A(J+1)
23  CONTINUE
C      A(ITOT+1)=AK
C      PUT J=NUMBER ONE LESS THAN THE NO OF H SAMPLE
C      DO 33 J=1,JH-1
C      X(J)=X(J+1)
33  CONTINUE
C      X(JH)=AK

```



```

C      VK=0.0
C      NO OF ITERATION EQUAL TO NO OF P SAMPLE
DO 34 I=1,JP
  IF((I-1).GE.0) GO TO 29
  VK=VK+P(I)*X(JP+1-I)
34  CONTINUE
C      EQUATE K TO NUMBER OF FUTURE SAMPLE IN COMBINED IMP RESPONSE
29  IF(K.LE.IFS) GO TO 10
  GK=SUBSDIF(MEAN,SIGMA)
C      J IS UP TO NO OF PRE-AMP SAMPLE MINUS ONE
DO 35 J=1,JP-1
  C1(J)=C1(J+1)
35  CONTINUE
  GN(JP)=GK
  ANK=0.0
C      NO OF ITERATION EQUAL TO NO OF PRE-AMP SAMPLE
DO 36 J=1,JP
  IF((I-IFS-J).LT.0) GO TO 30
  ANK=ANK+P(J)*GN(JP+1-J)
36  CONTINUE
30  IF(VK.GE.0) GO TO 60
  EK=-1.0
  GO TO 61
60  EK=1.0
61  IF(A(1+IFTRM).EQ.EK) GO TO 62
  JE1=JE1+1
C      RK=INPUT SIGNAL TO DEF
62  RK =VK+ANK
  IF(RK.GE.0) GO TO 37
C      SK=RECONSTRUCTED DATA WITHOUT DFE
  SK =-1.0
  GO TO 38
37  SK =1.0
38  IF(A(1+IFTRM).EQ.SK ) GO TO 40
  NO1S=NO1S+1
40  IF(K.GT.10) GO TO 41

```



```

C                                     110
      JFTJE(45,99)( VK,ANK,RK,X(JH),GN(JP),A(1+IFTBM),SK,AK,GK)
90  FORMAT(10X,3(E15.5),5X,2F8.3,2F5.1,5X,A1,F5.1,2X,F6.3)
C  TAP GAIN ITERATION START FROM THIS POINT
C  -----
41  DO 12 J=1,JF-1
      T(J)=T(J+1)
12  CONTINUE
      T(JF)=RK
C  EQUATE K TO NO OF FUTURE SAMPLES +NO OF FWD TAPS BEFORE MAIN TAP
      IF(K.LE.(ITOT)) GO TO 10
C  GIVE RANGE IN WHICH VALUE OF TAP GAIN REQUIRED
      IF(L.LE.TRANGE) GO TO 26
      IF(K.GT.LRANGE) GO TO 26
      DO 11 J=1,JF
          FF(J) =F(J)
11  CONTINUE
      DO 09 J=1,JB
          BB(J) =B(J)
09  CONTINUE
C  YK=OUTPUT OF FORWARD FILTER
26  YK=0
      DO 13 J=1,JF
          YK=YK+T(J)*F(J)
13  CONTINUE
      DO 14 I=1,JB
          S(I)=S(I+1)
14  CONTINUE
C  ZK=OUTPUT OF FEEDBACK FILTER
      ZK=0
      DO 15 I =1,JB
          ZK=ZK+S(I)*B(I)
15  CONTINUE
      SCURLK=YK-ZK
      IF(SCURLK.GE.0) GO TO 25
      S(JB+1)=-1

```



```

C                                     111
C      S(JB+1)=RECONSTRUCTED DATA AFTER DEL
GO TO 16
25      S(JB+1)=1
16      IF(K.GE.IFIX) GO TO 22
C6      IF(K.GE.(ITOT+1)) GO TO 22
      EK=(SCURLK-S(JB+1))
C      EK=ERROR SIGNAL
C      USE THE VALUE OF K AS DEFINED EARLIER PLUS 1 AFTER TAPS ARE FIXED
C      GIVE ITERATION NO TO FIX TAPS GAIN
C      IF(K.GE.5 ) GO TO 22
      EMULTI=EK*ALFA
      DO 17 J=1,JF
C      F(J)=UPDATED TAP GAIN VALUE OF FORWARD FILTER
      F(J)=F(J)-EMULTI*T(J)
C      TYPE*,F(1)
17      CONTINUE
      DO 18 J=1,JB
C      B(J)=UPDATED TAP GAIN VALUE OF FEEDBACK FILTER
      B(J)=B(J)+EMULTI*S(J)
18      CONTINUE
22      IF(S(JB+1).GT.0) GO TO 19
      ICK=-1.0
      GO TO 20
19      ICK=1
20      IF(A(1) .EQ.ICK) GO TO 21
      D(I)='*'
      NO2=NO2+1
      WRITE(45,*)NO2,K
      IF(NO2.GT.100) GO TO 70
      GO TO 28
21      D(I)='.'
C      GIVE SAME RANGE TO WRITE THE TAP GAIN VALUES IN O/P FILE
28      IF(K.LE.IRANGE) GO TO 27
      IF(K.GT.JRANGE ) GO TO 27
C      WRITE(38,85)(YK,ZK,SCURLK,S(JB+1),E(K))
      WRITE(45,86)(FF(J),J=1,JF),(BB(J),J=1,JB)

```



```

C
C      GIVE  TOTAL NUMBER OF FWD & BACKWARD TAPS
C      -----
86      FORMAT(2X,7(E13.4))
27      CONTINUE
10      CONTINUE
70      WRITE(15,91)JE1
91      FORMAT(10X,'NO OF ERROR LESS NOISE=',I7,5X,F5.1)
      WRITE(45,93)NO1S,NO2,K
93      FORMAT(5X,'NUMBER OF ERROR AFTER SLICER ARE=',I6,5X,'NUMBER OF
1 ERROR IN 1/P-O/P ARE=',I4,5X,'VALUE OF K='I7)
      DO 94 I=1,NR
C      WRITE(45,97)((IC(I*25-25+J),IR(I*25-25+J),A(I*25-25+J)),J=1,25)
      WRITE(45,97)(D(I*100-100+J),J=1,100)
94      CONTINUE
27      FORMAT(10X,100(A1))
      WRITE(46,*)JE1
      WRITE(46,*)NO1S
      DO 95 I=1,NR
      WRITE(46,97)(H(I*100-100+J),J=1,100)
95      CONTINUE
      WRITE(45,99)
99      FORMAT(10X,'ERROR IN ITERATION')
      DO 91 I=1,2
      WRITE(45,98)(E(I*10-10+J),J=1,10)
91      CONTINUE
98      FORMAT(10(1X,E12.4))
      STOP;END

```